

Purchase Order

DO NOT INVOICE TO THIS ADDRESS
City and County of Denver

Purchasing Division
 201 West Colfax Avenue Dept.304
 Denver, CO 80202
 United States
 Phone: 720/913-8100 Fax: 720/913-8101



Purchase Order PWOPS-0000012704	Date 01/25/2017	Revision	Page: 1 of 6
Payment Terms Net30	Freight Terms DESTINATION	Ship Via Common	
Buyer Miskell, Andrew - Purchasing	Phone 720/913-8159	Origin REG	

Vendor: 0000031445 Phone: 303/675-0111 Fax: 303/675-0888

RUSH TRUCK CENTERS OF COLORADO INC
 5165 VASQUEZ BLVD
 DENVER CO 80216
 United States

Ship To:
 DPW Fleet Maintenance
 5440 Roslyn
 Building C, Door C-6
 Denver CO 80216
 United States

Bill To:
 Accounts Payable
 201 West Colfax Ave Dept 908
 invoices@denvergov.org
 720/913-8811
 Denver CO 80202
 United States

Tax Exempt? Y **Tax Exempt ID:** 98-02890-000

Line-Sch	Vendor Part#/Description	Mfg ID	Quantity	UOM	PO Price	Extended Amt	Due Date
1 - 1	Peterbilt 220 Cab and Chassis with AMREP AMH BPO 12 yd refuse body.		3.00	EA	\$198,087.00	\$594,261.00	09/30/2017

Trash Truck, automated barrel loader 12 Yard.
 Reference numbers 17-084, 085, 086

Configuration #1
 Cab and Chassis: \$93,133.00
 Refuse Body: \$104,039.00
 Additional Options included:
 4.9.C - Spare Tire \$790.00
 4.9.d - Camera 5 yr warranty \$125.00

Grand Total Each Refuse Truck: \$198,087.00

Req ID: 0000057734

Purchase Order

**DO NOT INVOICE TO THIS ADDRESS
City and County of Denver**

Purchasing Division
201 West Colfax Avenue Dept.304
Denver, CO 80202
United States
Phone: 720/913-8100 Fax: 720/913-8101



Purchase Order PWOPS-0000012704	Date 01/25/2017	Revision	Page: 2 of 6
Payment Terms Net30	Freight Terms DESTINATION	Ship Via Common	
Buyer Miskell, Andrew - Purchasing	Phone 720/913-8159	Origin REG	

Vendor: 0000031445 Phone: 303/675-0111 Fax: 303/675-0888

RUSH TRUCK CENTERS OF COLORADO INC
5165 VASQUEZ BLVD
DENVER CO 80216
United States

Ship To:
DPW Fleet Maintenance
5440 Roslyn
Building C, Door C-6
Denver CO 80216
United States

Bill To:
Accounts Payable
201 West Colfax Ave Dept 908
invoices@denvergov.org
720/913-8811
Denver CO 80202
United States

Tax Exempt? Y **Tax Exempt ID:** 98-02890-000

Line-Sch	Vendor Part#/Description	Mfg ID	Quantity	UOM	PO Price	Extended Amt	Due Date
----------	--------------------------	--------	----------	-----	----------	--------------	----------

Vendor to fill in and submit attached Exhibit-Vehicle Check-In.
Delivery will NOT be considered complete without it.

Agency Contact: Gary Bales | (720) 337-1197 | Gary.Bales@denvergov.org

Vendor Contact: Rush Truck - Damon Cummings | (719) 660-8749 | CummingsD1@RushEnterprises.com
Hardline Equipment - Walt Von Duhn | (303) 500-2176 | Waltv@HardlineEquipment.com

Delivery: Monday through Friday between 8:00am and 1:00pm.
Location:

CITY AND COUNTY OF DENVER
Fleet Management
5440 Roslyn St. Building C
Denver, CO 80216
Coordinate delivery: Call (720) 865-3903

Title to Read:
City and County of Denver
201 W. Colfax Avenue Dept 304
Denver, CO 80202

Documents to be Provided Upon Delivery:
Application for Title, State of Colorado
Odometer Statement

Ref #s: 17-084, 17-085, and 17-086

Chartfield String: 842000-11804-5053400

REFER TO EXHIBITS "A and B" FOR SERVICE DESCRIPTION AND PRICING ONLY.

VENDOR: You must contact the agency contact listed above to confirm this order.

Purchase Order price listed herein includes all shipping and handling.

All invoicing must match the purchase order exactly and contain the purchase order number. All invoices must be sent directly to the bill to address listed on the purchase order, this address may be different than the ship to address. Changes to this purchase are not valid without prior approval from purchasing.

For additional questions regarding this purchase order and the terms herein contact: Andrew Miskell | 720-913-8159 | andrew.miskell@denvergov.org

Purchase Order

DO NOT INVOICE TO THIS ADDRESS
City and County of Denver

Purchasing Division
 201 West Colfax Avenue Dept.304
 Denver, CO 80202
 United States
 Phone: 720/913-8100 Fax: 720/913-8101



Purchase Order PWOPS-0000012704	Date 01/25/2017	Revision	Page: 3 of 6
Payment Terms Net30	Freight Terms DESTINATION		Ship Via Common
Buyer Miskell, Andrew - Purchasing	Phone 720/913-8159	Origin REG	

Vendor: 0000031445 Phone: 303/675-0111 Fax: 303/675-0888

RUSH TRUCK CENTERS OF COLORADO INC
 5165 VASQUEZ BLVD
 DENVER CO 80216
 United States

Ship To:
 DPW Fleet Maintenance
 5440 Roslyn
 Building C, Door C-6
 Denver CO 80216
 United States

Bill To:
 Accounts Payable
 201 West Colfax Ave Dept 908
 invoices@denvergov.org
 720/913-8811
 Denver CO 80202
 United States

Tax Exempt? Y **Tax Exempt ID:** 98-02890-000

Line-Sch	Vendor Part#/Description	Mfg ID	Quantity	UOM	PO Price	Extended Amt	Due Date
----------	--------------------------	--------	----------	-----	----------	--------------	----------

ALL INVOICING AND CORRESPONDENCE MUST CONTAIN THE PURCHASE ORDER NUMBER IN FULL (PWOPS####)

Authorizing Bill 16-1032

Purchase Made Under the Provisions of Section 20-63(A) of the Revised Municipal Code. Formal Procedure

Purchase Made Under the Provisions of Section 20-64(A)(1) of the Revised Municipal Code. Sole Source

Purchase Made Under the Provisions of Section 20-64(A)(4) of the Revised Municipal Code. Standardization

This Purchase Order is contingent on City Council action in accordance with 3.2.6(e) of the City Charter and is void without such action.

Total PO Amount

\$594,261.00

Any Discrepancies must be reconciled with the Purchasing Division Buyer before this order is filled.

This Purchase Order may contain an item or items issued pursuant to a Master Purchase Order(s) ("MPO") previously agreed to between the City and the Vendor. All of the terms and conditions of the MPO(s) referenced above shall govern the purchase of the related item(s). The Vendor acknowledges and agrees by accepting this Purchase Order: a) that for any item referencing an MPO and where the terms and conditions stated in this Purchase Order differ from the MPO(s) the PO terms are void and of no effect [unless agreed to in a separate written or electronic acknowledgment between the Vendor and the Director of Purchasing] and b) that where there is no MPO referenced above, the Vendor agrees to be bound by all of the terms and conditions of this Purchase Order.

If this purchase order is for a task order, the terms and conditions of the applicable City contract shall govern.

Purchase Order

DO NOT INVOICE TO THIS ADDRESS
City and County of Denver

Purchasing Division
 201 West Colfax Avenue Dept.304
 Denver, CO 80202
 United States
 Phone: 720/913-8100 Fax: 720/913-8101



Purchase Order PWOPS-0000012704	Date 01/25/2017	Revision	Page: 4 of 6
Payment Terms Net30	Freight Terms DESTINATION	Ship Via Common	
Buyer Miskell, Andrew - Purchasing	Phone 720/913-8159	Origin REG	

Vendor: 0000031445 Phone: 303/675-0111 Fax: 303/675-0888

RUSH TRUCK CENTERS OF COLORADO INC
 5165 VASQUEZ BLVD
 DENVER CO 80216
 United States

Ship To:
 DPW Fleet Maintenance
 5440 Roslyn
 Building C, Door C-6
 Denver CO 80216
 United States

Bill To:
 Accounts Payable
 201 West Colfax Ave Dept 908
 invoices@denvergov.org
 720/913-8811
 Denver CO 80202
 United States

Tax Exempt? Y **Tax Exempt ID:** 98-02890-000

Line-Sch	Vendor Part#/Description	Mfg ID	Quantity	UOM	PO Price	Extended Amt	Due Date
----------	--------------------------	--------	----------	-----	----------	--------------	----------

TERMS AND CONDITIONS

GENERAL CONDITIONS OF PURCHASE:

1. Non-Exclusive: This Purchase Order is non-exclusive. City does not guarantee any minimum purchase other than as provided herein
2. Inspection and Acceptance: Vendor shall perform all services in accordance with the standard of care exercised by highly competent vendors who perform like or similar services. City may inspect all goods/services prior to acceptance. Payment does not constitute acceptance. Vendor shall bear the cost of any inspection/testing that reveal goods/services that are defective or do not meet specifications. City's failure to accept or reject goods/services shall not relieve Vendor from its responsibility for such goods/services that are defective or do not meet specifications nor impose liability on City for such goods/services. If any part of the goods/services are not acceptable to City, City may, in addition to any other rights it may have at law or in equity: (1) make a warranty claim; (2) repair and/or replace the goods or substitute other services at Vendor's expense; or (3) reject and return the goods at Vendor's cost and/or reject the services at Vendor's expense for full credit. Any rejected goods/services are not to be replaced without written authorization from City, and any such replacement shall be on the same terms and conditions contained in this Purchase Order.
3. Shipping, Taxes and Other Credits and Charges: Vendor shall procure all permits and licenses; pay all charges, taxes and fees; and give all notices necessary and incidental to the fulfillment of this Purchase Order and all cost thereof have been included in the prices contained herein. City shall not be liable for the payment of taxes, late charges or penalties of any nature, except as required by D.R.M.C. § 20-107, et seq. The price of all goods/services shall reflect all applicable tax exemptions. City's Federal Registration No. is 84-6000580 and its State Registration No. is 98-02890. All pricing is F.O.B. destination unless otherwise specified. Shipments must be marked with Vendor's name, the Purchase Order number, and contain a delivery or packing slip. Vendor shall not impose any charges for boxing, crating, parcel post, insurance, handling, freight, express or other similar charges or fees. Vendor shall notify City in writing of any price decreases immediately, and City shall receive the benefit thereof on all unshipped items. Vendor shall comply with any additional delivery terms specified herein. Vendor shall be responsible for the cleanup and reporting of any contamination (environmental or otherwise) or spillage resulting from the delivery and/or unloading of goods within twenty-four (24) hours of the contamination or spillage or sooner if required by law. Vendor shall pay all sales and use taxes levied by City on any tangible personal property built into the goods/services. Vendor shall obtain a Certificate of Exemption from the State of Colorado Department of Revenue prior to the purchase of any materials to be built into the goods/services and provide a copy of the Certificate to City prior to final payment.
4. Risk of Loss: Vendor shall bear the risk of loss, injury or destruction of goods prior to delivery to City. Loss, injury or destruction shall not release Vendor from any obligation hereunder.
5. Invoice: Each invoice shall include: (i) the purchase order number; (ii) individual itemization of the goods/services; (iii) per unit price, extended and totaled; (iv) quantity ordered, back ordered and shipped; (v) an invoice number and date; (vi) ordering department's name and "ship to" address; and (vii) agreed upon payment terms set forth herein.
6. Payment: Payment shall be subject to City's Prompt Payment Ordinance D.R.M.C. § 20-107, et-seq, after City accepts the goods/services. City's payment obligations hereunder, whether direct or contingent, shall extend only to funds appropriated by the Denver City Council for the purpose of this Purchase Order, encumbered for the purpose of this Purchase Order and paid into the Treasury of City. Vendor acknowledges that: (i) City does not by this Purchase Order, irrevocably pledge present cash reserves for payments in future fiscal years; and (ii) this Purchase Order is not intended to create a multiple-fiscal year direct or indirect debt or financial obligation of City. City may setoff against any payments due to Vendor any claims and/or credits it may have against Vendor under this Purchase Order.
7. Amendments/Changes: Only the Manager of General Services or his delegate is authorized to change or amend this Purchase Order by a formal written change order. Any change or amendment that would cause the aggregate payable under this Purchase Order to exceed the amount appropriated and encumbered for this Purchase Order is expressly prohibited and of no effect. Vendor shall verify that the amount appropriated and encumbered is sufficient to cover any increase in cost due to changes or amendments. Goods/services provided without such verification are provided at Vendor's risk. The Vendor has no authority to bind City on any contractual matters.
8. Warranty: Vendor warrants and guarantees to City that all goods furnished under this Purchase Order are free from defects in workmanship and materials, are merchantable, and fit for the purposes for which they are to be used. For any goods furnished under this Purchase Order which become defective within twelve (12) months (unless otherwise specified) after date of receipt by City, Vendor shall either, at City's election and to City's satisfaction, remedy any and all defects or replace the defective goods at no expense to City within seven (7) days of receipt of the defective goods or accept the defective goods for full credit and payment of any return shipping charges. Vendor shall be fully responsible for any and all warranty work, regardless of third party warranty coverage. Vendor shall furnish additional or replacement parts at the same prices, conditions and specifications delineated herein.
9. Indemnification/Limitation of Liability: Vendor shall indemnify and hold harmless City (including but not limited to its employees, elected and appointed officials, agents and representatives) against any and all losses (including without limitation, loss of use and costs of cover), liability, damage, claims, demands, actions and/or proceedings and all costs and expenses connected therewith (including without limitation attorneys' fees) that arise out of or relate to any claim of infringement of patent, trademark, copyright, trade secret or other intellectual property right related to this Purchase Order or that are caused by or the result of any act or omission of Vendor, its agents, suppliers, employees, or representatives. Vendor's obligation shall not apply to any liability or damages which result solely from the negligence of City. City shall not be liable for any consequential, incidental, indirect, special, reliance, or punitive damages or for any lost profits or revenues, regardless of the legal theory under which such liability is asserted. In no event shall City's aggregate liability exceed the agreed upon cost for those goods/services that have been accepted by City under this Purchase Order up to the Total Purchase Order Amount. Notwithstanding anything contained in this Purchase Order to the contrary, City in no way limits or waives the rights, immunities and protections provided by C.R.S. § 24-10-101, et seq.
10. Termination: City may terminate this Purchase Order, in whole or in part, at any time and for any reason immediately upon written notice to Vendor. In the event of such a termination, City's sole liability shall be limited to payment of the amount due for the goods/services accepted by City. Vendor acknowledges the risks inherent in this termination for convenience and expressly accepts them. Termination by City shall not constitute a waiver of any claims City may have against Vendor.
11. Interference: Vendor shall notify the Director of Purchasing immediately of any condition that may interfere with the performance of Vendor's obligations under this Purchase Order and confirm such notification in writing within twenty-four (24) hours. City's failure to respond to any such notice shall in no way act as a waiver of any rights or remedies City may possess.
12. Venue, Choice of Law and Disputes: Venue for all legal actions shall lie in the District Court in and for City and County of Denver, State of Colorado, and shall be governed by the laws of the State of Colorado as well as the Charter and Revised Municipal Code, rules, regulations, Executive Orders, and fiscal rules of City. All disputes shall be resolved by administrative hearing, pursuant to the procedure established by D.R.M.C. § 56-106. Director of Purchasing shall render the final determination.

Purchase Order

DO NOT INVOICE TO THIS ADDRESS

City and County of Denver

Purchasing Division
201 West Colfax Avenue Dept.304
Denver, CO 80202
United States
Phone: 720/913-8100 Fax: 720/913-8101



Purchase Order PWOPS-0000012704	Date 01/25/2017	Revision	Page: 5 of 6
Payment Terms Net30	Freight Terms DESTINATION	Ship Via Common	
Buyer Miskell, Andrew - Purchasing	Phone 720/913-8159	Origin REG	

Vendor: 0000031445 Phone: 303/675-0111 Fax: 303/675-0888

RUSH TRUCK CENTERS OF COLORADO INC
5165 VASQUEZ BLVD
DENVER CO 80216
United States

Ship To:
DPW Fleet Maintenance
5440 Roslyn
Building C, Door C-6
Denver CO 80216
United States

Bill To:
Accounts Payable
201 West Colfax Ave Dept 908
invoices@denvergov.org
720/913-8811
Denver CO 80202
United States

Tax Exempt? Y

Tax Exempt ID: 98-02890-000

Line-Sch	Vendor Part#/Description	Mfg ID	Quantity	UOM	PO Price	Extended Amt	Due Date
<p>13. Assignment/No Third Party Beneficiary: Vendor shall not assign or subcontract any of its rights or obligations under this Purchase Order without the written consent of City. In the event City permits an assignment or subcontract, Vendor shall continue to be liable under this Purchase Order and any permitted assignee or subcontractor shall be bound by the terms and conditions contained herein. This Purchase Order is intended solely for the benefit of City and Vendor with no third party beneficiaries</p>							
<p>14. Notice: Notices shall be made by Vendor to the Director of Purchasing and by City to Vendor at the addresses provided herein, in writing sent registered, return receipt requested.</p>							
<p>15. Compliance With Laws: Vendor shall observe and comply with all federal, state, county, city and other laws, codes, ordinances, rules, regulations and executive orders related to its performance under this Purchase Order. City may immediately terminate this Purchase Order, in whole or in part, if Vendor or an employee is convicted, plead nolo contendere, or admits culpability to a criminal offense of bribery, kickbacks, collusive bidding, bid-rigging, antitrust, fraud, undue influence, theft, racketeering, extortion or any offense of a similar nature.</p>							
<p>16. Insurance: Vendor shall secure, before delivery of any goods/services, the following insurance covering all operations, goods and services provided to City. Vendor shall keep the required insurance coverage in force at all times during the term of the Purchase Order, or any extension thereof, during any warranty period, and for three (3) years after termination of this Purchase Order. The required insurance shall be underwritten by an insurer licensed to do business in Colorado and rated by A.M. Best Company as "A-"VIII or better. Each policy shall contain a valid provision or endorsement requiring notification to the City in the event any of the required policies be canceled or non-renewed before the expiration date thereof. Such written notice shall be sent to the parties identified in the Notices section of this Agreement. Such notice shall reference the City contract number listed on the signature page of this Agreement. Said notice shall be sent thirty (30) days prior to such cancellation or non-renewal unless due to non-payment of premiums for which notice shall be sent ten (10) days prior. If such written notice is unavailable from the insurer, contractor shall provide written notice of cancellation, non-renewal and any reduction in coverage to the parties identified in the Notices section within three (3) business days of such notice by its insurer(s) and referencing the City's contract number. If any policy is in excess of a deductible or self-insured retention, City must be notified by Vendor. Vendor shall be responsible for the payment of any deductible or self-insured retention. The insurance coverages specified in this Purchase Order are the minimum requirements, and these requirements do not lessen or limit the liability of Vendor. Risk Management reserves the right to require additional policies and/or limits based on agreement scope of work. Vendor shall provide a copy of this Purchase Order to its insurance agent or broker. Vendor may not commence services or work relating to the Purchase Order prior to placement of coverage. Contractor certifies that the attached certificate of insurance attached to the Purchase Order documents, preferably an ACORD certificate, complies with all insurance requirements of this Purchase Order. The City's acceptance of a certificate of insurance or other proof of insurance that does not comply with all insurance requirements set forth in this Purchase Order shall not act as a waiver of Vendor's breach of this Purchase Order or any of the City's rights or remedies under this Agreement. The City's Risk Management Office may require additional proof of insurance, including but not limited to policies and endorsements. Vendor's insurer shall name as Additional Insured to its Commercial General Liability and Business Auto Liability policies the City and County of Denver, its elected and appointed officials, employees and volunteers. Vendor's insurer shall waive subrogation rights against the City. All sub-contractors and sub-consultants (including independent contractors, suppliers or other entities providing goods/services required by this Purchase Order) shall be subject to all of the requirements herein and shall procure and maintain the same coverages required of Vendor. Vendor shall include all such entities as insureds under its policies or shall ensure that they all maintain the required coverages. Vendor shall provide proof of insurance for all such entities upon request by City. For Worker's Compensation Insurance, Vendor shall maintain the coverage as required by statute for each work location and shall maintain Employer's Liability insurance with limits of \$100,000 for each bodily injury occurrence claim, \$100,000 for each bodily injury caused by disease claim, and \$500,000 aggregate for all bodily injuries caused by disease claims. Vendor expressly represents to City, as a material representation upon which City is relying, that none of the Vendor's officers or employees who may be eligible under any statute or law to reject Workers' Compensation Insurance shall effect such rejection during any part of the term of this Purchase Order, and that any such rejections previously effected, have been revoked. Vendor shall maintain Commercial General Liability coverage with limits of \$1,000,000 for each occurrence, \$1,000,000 for each personal and advertising injury claim, \$2,000,000 products and completed operations aggregate, and \$2,000,000 policy aggregate. Vendor shall maintain Business Auto Liability coverage with limits of \$1,000,000 combined single limit applicable to all owned, hired and non-hired vehicles used in performing services under this Purchase Order. For Commercial General Liability coverage, the policy must provide the following: (i) That this Purchase Order is an Insured Contract under the policy; (ii) Defense costs in excess of policy limits; (iii) A severability of interests, separation of insureds or cross liability provision; and (iv) A provision that coverage is non-contributory with other coverage or self-insurance provided by City. For claims-made coverage, the retroactive date must be on or before the first date when any goods or services were provided to City. Vendor must advise the City in the event any general aggregate or other aggregate limits are reduced below the required per occurrence limits. At their own expense, and where such general aggregate or other aggregate limits have been reduced below the required per occurrence limit, the Contractor will procure such per occurrence limits and furnish a new certificate of insurance showing such coverage is in force.</p>							
<p>17. Severability: If any provision of this Purchase Order, except for the provisions requiring appropriation and encumbering of funds and limiting the total amount payable by City, is held to be invalid, illegal or unenforceable by a court of competent jurisdiction, the validity of the remaining portions or provisions shall not be affected if the intent of City and Vendor can be fulfilled.</p>							
<p>18. Survival: All terms and conditions of this Purchase Order which by their nature must survive termination/expiration shall so survive. Without limiting the foregoing, Vendor's insurance, warranty and indemnity obligations shall survive for the relevant warranty or statutes of limitation period plus the time necessary to fully resolve any claims, matters or actions begun within that period. Bonds shall survive as long as any warranty period.</p>							
<p>19. No Construction Against Drafting Party: No provision of this Purchase Order shall be construed against the drafter.</p>							
<p>20. Status of Vendor/Ownership of Work Product: Vendor is an independent contractor retained on a contractual basis to perform services for a limited period of time as described in Section 9.1.1E(x) of the Charter of City. Vendor and its employees are not employees or officers of City under Chapter 18 of the D.R.M.C. for any purpose whatsoever. All goods, deliverables, hardware, software, plans, drawings, reports, submittals and all other documents or things furnished to City by Vendor shall become and are the property of City, without restriction.</p>							
<p>21. Records and Audits: Vendor shall maintain for three (3) years after final payment hereunder, all pertinent books, documents, papers and records of Vendor involving transactions related to this Purchase Order, and City shall have the right to inspect and copy the same.</p>							
<p>22. Remedies/Waiver: No remedy specified herein shall limit any other rights and remedies of City at law or in equity. No waiver of any breach shall be construed as a waiver of any other breach.</p>							
<p>23. No Discrimination in Employment: Vendor shall not refuse to hire, discharge, promote or demote, or to discriminate in matters of compensation against any person otherwise qualified, solely because of race, color, religion, national origin, gender, age, military status, sexual orientation, marital status, or physical or mental disability; and Vendor shall insert the foregoing provision in any subcontracts hereunder.</p>							

Purchase Order

DO NOT INVOICE TO THIS ADDRESS
City and County of Denver

Purchasing Division
 201 West Colfax Avenue Dept.304
 Denver, CO 80202
 United States
 Phone: 720/913-8100 Fax: 720/913-8101



Purchase Order PWOPS-0000012704	Date 01/25/2017	Revision	Page: 6 of 6
Payment Terms Net30	Freight Terms DESTINATION	Ship Via Common	
Buyer Miskell, Andrew - Purchasing	Phone 720/913-8159	Origin REG	

Vendor: 0000031445 Phone: 303/675-0111 Fax: 303/675-0888

RUSH TRUCK CENTERS OF COLORADO INC
 5165 VASQUEZ BLVD
 DENVER CO 80216
 United States

Ship To:
 DPW Fleet Maintenance
 5440 Roslyn
 Building C, Door C-6
 Denver CO 80216
 United States

Bill To:
 Accounts Payable
 201 West Colfax Ave Dept 908
 invoices@denvergov.org
 720/913-8811
 Denver CO 80202
 United States

Tax Exempt? Y **Tax Exempt ID:** 98-02890-000

Line-Sch	Vendor Part#/Description	Mfg ID	Quantity	UOM	PO Price	Extended Amt	Due Date
----------	--------------------------	--------	----------	-----	----------	--------------	----------

24. Use, Possession or Sale of Alcohol or Drugs: Vendor shall cooperate and comply with the provisions of Executive Order 94. Violation may result in City terminating this Purchase Order or barring Vendor from City facilities or from participating in City operations.

25. Conflict of Interest: No employee of City shall have any personal or beneficial interest in the goods/services described in this Purchase Order; and Vendor shall not hire or contract for services any employee or officer of City which would be in violation of City's Code of Ethics, D.R.M.C. §2-51, et seq. or the Charter §§ 1.2.8, 1.2.9, and 1.2.12.

26. Advertising and Public Disclosure: The Vendor shall not include any reference to the Purchase Order or to services performed or goods purchased pursuant to the Purchase Order in any of the Vendor's advertising or public relations materials without first obtaining the written approval of the Director of Purchasing.

27. NO EMPLOYMENT OF ILLEGAL ALIENS TO PERFORM WORK UNDER THE AGREEMENT: a. This Agreement is subject to Division 5 of Article IV of Chapter 20 of the Denver Revised Municipal Code, and any amendments (the "Certification Ordinance"). b. The Contractor certifies that: (1) At the time of its execution of this Agreement, it does not knowingly employ or contract with an illegal alien who will perform work under this Agreement. (2) It will participate in the E-Verify Program, as defined in § 8 17.5-101(3.7), C.R.S., to confirm the employment eligibility of all employees who are newly hired for employment to perform work under this Agreement. c. The Contractor also agrees and represents that: (1) It shall not knowingly employ or contract with an illegal alien to perform work under the Agreement. (2) It shall not enter into a contract with a subconsultant or subcontractor that fails to certify to the Contractor that it shall not knowingly employ or contract with an illegal alien to perform work under the Agreement. (3) It has confirmed the employment eligibility of all employees who are newly hired for employment to perform work under this Agreement, through participation in the E-Verify Program. (4) It is prohibited from using the E-Verify Program procedures to undertake pre-employment screening of job applicants while performing its obligations under the Agreement, and that otherwise requires the Contractor to comply with any and all federal requirements related to use of the E-Verify Program including, by way of example, all program requirements related to employee notification and preservation of employee rights.

(5) If it obtains actual knowledge that a subconsultant or subcontractor performing work under the Agreement knowingly employs or contracts with an illegal alien, it will notify such subconsultant or subcontractor and the City within three (3) days. The Contractor will also then terminate such subconsultant or subcontractor if within three (3) days after such notice the subconsultant or subcontractor does not stop employing or contracting with the illegal alien, unless during such three-day period the subconsultant or subcontractor provides information to establish that the subconsultant or subcontractor has not knowingly employed or contracted with an illegal alien. (6) It will comply with any reasonable request made in the course of an investigation by the Colorado Department of Labor and Employment under authority of § 8-17.5-102(5), C.R.S. or the City Auditor, under authority of D.R.M.C. 20-90.3. d. The Contractor is liable for any violations as provided in the Certification Ordinance. If Contractor violates any provision of this section or the Certification Ordinance, the City may terminate this Agreement for a breach of the Agreement. If the Agreement is so terminated, the Contractor shall be liable for actual and consequential damages to the City. Any such termination of a contract due to a violation of this section or the Certification Ordinance may also, at the discretion of the City, constitute grounds for disqualifying Contractor from submitting bids or proposals for future contracts with the City.

28. In order to receive payment, a complete and responsive invoice must be submitted as required by the City's Prompt Payment Ordinance Article VII of Chapter 20, D.R.M.C., which includes clearly stating the City-generated purchase order or contract number on the invoice and complying with the City's invoicing instructions, including delivery of the invoice to the proper City official or agency.

29. Warranty: Vendor warrants and guarantees to City that all goods furnished under this Purchase Order are free from defects in workmanship and materials, are merchantable, and fit for the purposes for which they are to be used and that any professional services associated with the goods, or stand alone professional services under \$10,000, shall be performed in a workmanlike and professional manner, with the degree of skill and judgment normally exercised by recognized professionals performing services of the same or substantially similar nature. For any goods or services which are, or become defective within twelve (12) months (unless otherwise specified) after date of receipt by City, Vendor shall at no expense to City, at City's election and to City's satisfaction, either remedy any and all defects or replace the defective goods within seven (7) days of receipt of the defective goods or accept the defective goods for full credit and payment of any return shipping charges. Vendor shall be fully responsible for any and all warranty work, regardless of third party warranty coverage. Vendor shall furnish additional or replacement parts at the same prices, conditions and specifications delineated herein.

Authorized Signature

CCD EXHIBIT A - PO# PWOPS 12704



rushtruckcenters.com

Rush Truck Center – Denver | 6955 E 50th Ave. | Commerce City, Colorado 80022 | 303-291-6300 direct | 888-895-7383 toll free

City & County of Denver

January 10, 2017

201 West Colfax Ave.

Dept. 304

Denver, CO. 80202

Attn: Gary Bales

Below is in reference to proposal #6993. Purchase of the Peterbilt 220 cab and chassis' with the AMREP AMH BPO 12 yd. refuse body. We agree and will abide by all original specifications and all revisions listed in proposal #6993 dated 2015-2016.

Please note that proposal should be #7294

AMREP refuse body meets or exceeds all specs in proposal #6993

2017 pricing \$105,047.85

Peterbilt 220 cab & chassis meets or exceeds all specs on proposal #6993

2017 pricing \$93,514.35

Total per unit that match proposal #6993 \$198,562.20

Gary Johnson

General Regional Manager

Rush Truck Center of Denver

6955 E. 50th. Ave

Denver, CO. 80022

Please note no inspection trip is required (item 4.9.e on page 5 of the attachment). Price per unit should be \$198,087.00.



CCD EXHIBIT B - PO# PWOPS 12704

(3) Barrel Loaders - Peterbilt 220 - JAN '17 Order

RETURN TO:
Department of General Services
PURCHASING DIVISION
201 West Colfax Avenue
Department 304, 11th Floor
Denver, CO 80202
Phone: (720) 913-8100
FAX: (720) 913-8101

CITY AND COUNTY OF DENVER



Department of General Services
PURCHASING DIVISION
www.denvergov.org/purchasing

Buyer: Megan deGrood
megan.degrood@denvergov.org

FORMAL PROPOSAL

Formal Proposal No. 7294

Small and Narrow Barrel Loader Refuse Trucks

SCHEDULE OF EVENTS

• Proposal Issued	April 24, 2015		
• Deadline to Submit Additional Questions	April 30, 2015	4:00 P.M.	Local Time
• Response to Written Questions	May 5, 2015		
• Proposal Due Date	May 8, 2015	2:00 P.M.	Local Time
• Location of Proposal Opening	201 West Colfax Avenue Department 304, 11 th Floor Denver, CO 80202		

Vendor offers to furnish to the City and County of Denver the materials, supplies, products or services requested in accordance with the specifications and subject to the Terms and Conditions described herein.

VENDOR SIGN HERE

Company Name: RUSH TRUCK CENTER OF COLORADO INC.

By: MIKE RUSSELL

(Printed or Typed Name)

Signature: 

Signature constitutes acceptance of all Terms and Conditions listed on this form and all documents attached.

Email: RUSSELLM@RUSHENTERPRISES.COM

Phone: 303-292-3170

-Fill in and submit/ upload this page-

THIS PROPOSAL MUST BE RETURNED ELECTRONICALLY THROUGH THE ROCKY MOUNTAIN E-PURCHASING SYSTEM (BIDNET®).

Request for Clarification regarding the Inspection Trip Pricing

From: [Walt Vonduhn](#)
To: [DeGrood, Megan - Purchasing](#)
Subject: Re: Bid #7294
Date: Thursday, June 11, 2015 2:42:48 PM

Megan,
Air to Orange County is \$350.00 each
Hotel \$378.00
Car Rental \$192.00
Advance Booking per person.

Thank You
Walt vonDuhn
HardLine Equipment
303-500-2176

-----Original Message-----

From: DeGrood, Megan - Purchasing <Megan.DeGrood@denvergov.org>
To: Walt Vonduhn <waltvonduhn@aol.com>
Sent: Thu, Jun 11, 2015 9:16 am
Subject: RE: Bid #7294

Hi Walt,
Could you please look into the rates and see if they have improved?

~ Megan

From: Walt Vonduhn [<mailto:waltvonduhn@aol.com>]
Sent: Tuesday, June 09, 2015 11:38 AM
To: DeGrood, Megan - Purchasing
Subject: Re: Bid #7294

Megan,
In preparation for this trip if it was to be included, we looked at flying into Ontario, CA. I did this several months ago and that is the cost related. I am flexible and can recheck to see about flying into Orange County. I know Orange County is less expensive trip and I can certainly find out the rate now and get back with you. Last time we obviously lost on the deal and all because of time and rate changes. Please let me know how you would like to move forward? In the meantime I will check the rates and see if they have changed.

Thank You
Walt vonDuhn
HardLine Equipment
303-500-2176

-----Original Message-----

From: DeGrood, Megan - Purchasing <Megan.DeGrood@denvergov.org>
To: waltvonduhn <waltvonduhn@aol.com>
Sent: Tue, Jun 9, 2015 11:13 am

Subject: FW: Bid #7294

Hi Walt,

Can you please respond to my initial email below?

Thank you.

~ Megan

From: DeGroot, Megan - Purchasing [<mailto:>]

Sent: Monday, June 08, 2015 2:31 PM

To: Russell, Michael [DENVER-Administration]

Subject: Bid #7294

Hello Mike,

You responded to Bid #7294 for the Small and Narrow Barrel Loader Refuse Trucks.

In the space for the Inspection Trip Costs you provided the following;

4.
 - a. Air Fare per person: **\$850.00**
 - b. Surface Transportation Cost: **\$250.00**
 - c. Lodging per person per day: **\$250.00**
 - d. Meals per person per day: **\$100.00**

Does this pricing reflect cost **per person per day** as was indicated in the bid?

Rush responded to bid #6993 on October 17, 2012 and the cost was considerably less.

- a. Air Fare per person: **\$300.00**
- b. Surface Transportation Cost: **\$100.00**
- c. Lodging per person per day: **\$150.00**
- d. Meals per person per day: **\$50.00**

Please get back to me as soon as possible.

Thank you,

Megan deGroot

Associate Buyer | Purchasing Division

City and County of Denver

Phone: 720-913-8157 | Phone: 303-342-2184 (Tuesday)

Fax: 720-913-8101

megan.degroot@denvergov.org

QUOTE WITH REVISED INSPECTION TRIP PRICING

Hardline Equipment

Po Box 39
Henderson, Co. 80640

Proposal

Proposal Date: 6/12/2015

Proposal #: 3223

Project:

Bill To:

City and County of Denver
Accounts Payable
201 West Colfax Ave Dept 908
Denver, Co 80202

Description	Est. Hours/Qty.	Rate	Total
Air Fare Per Person to Ontario California through Orange County		350.00	350.00
Hotel Stay in Ontario, CA Per Person <u>2 Nights</u>		378.00	378.00
Rental Car for Event		192.00	192.00
		Total	\$920.00

1.3 Workmanship and Durability

Workmanship throughout the vehicle/equipment shall conform to the highest standards. Durability shall be sufficient to allow safe and efficient operation of the equipment/vehicle.

1.4 Completion of Bid Items and Alternates

Vendor shall complete each line item in "Offered Equipment" and "Cost" columns in the following manner:

- A. Provide vehicle/equipments technical information: in "Offered Equipment" provide technical information as requested and provide cost of item in "Cost" column.
- B. Included Standard Equipment: in "Offered Equipment" column provide technical information as requested for standard equipment in, "Cost" column write NC for "No Charge".
- C. Differences: in "RED" ink in "Offered Equipment" column adjacent to Description of Equipment provide information on the item being offered, in "Cost" column provide cost if there is a bid item cost.
- D. Vendors shall break out and list costs for each specification section. Failure to break out proposed costs may cause proposal to be non-responsive. Breakout costs will be used for comparisons clarifying cost issues and if deletions to the specifications need to be made.

1.5 Major Areas of Concern

	Description of Concern
A.	Approximate overall width of 86" or 7'-2" excluding mirrors.
B.	Mirror width for use in tight obstructed areas to include: <ol style="list-style-type: none"> 1. Overall extended mirror width. 2. Minimum mirror width. 3. Ability for mirrors to be hit by obstructions (branches etc) and absorb the hit without damage. 4. Ability for mirrors to be reset or adjusted into position without operator leaving operator's station.
C.	Right Side Operator Cab Area to include: <ol style="list-style-type: none"> 1. Visibility from the driver's seats (Blind Spots) 2. Steering wheel belly room. 3. Shoulder leg and hip room. 4. Head room. 5. Operator's vision. 6. Floor height and step distances. 7. Ergonomic layout of vehicle and dumpster body controls. 8. Ease and speed of operation of collection and packing functions.
D.	Warranty: <ol style="list-style-type: none"> 1. Ability and cost to obtain a 5-year warranty on cab and chassis. 2. Ability and cost to obtain a 5-year warranty on rear loader body, hydraulic pump, motors cylinders and controls. 3. Location of warranty providers.
E.	Service Ability: <ol style="list-style-type: none"> 1. Ability to easily service cab and chassis items that require regular (yearly or less) servicing and maintenance 2. Ability to easily service rear loader body components/items that require regular (yearly or less) adjusting, servicing and maintenance.

2.0 Build Status of Vehicles:

2.1 Contractor and all sub vendors after receipt of the City's purchase order shall:

The primary Contractor (prime vendor) shall be responsible for providing within 15 business days to the City a "Preliminary Build Status Plan" to include but not limited to:

- A. The "Build Status Plan" shall include sufficient detail to assure that the ordered units will meet specifications and be built to the highest quality standards and be delivered on time.
- B. Placement date of initial order with the cab and chassis manufacture.
- C. Cab and chassis manufacturer's date of order acceptance. Written order confirmation is required.
- D. Placement date of initial order with the body manufacture.
- E. Body manufacturer's date of order acceptance. Written order confirmation is required.
- F. Build dates for all cab and chassis to include start date and completion date.
- G. Build dates for the body to include start date and completion date.
- H. Delivery date of the cab and chassis to the sub vendor's body manufacturer.
- I. Beginning and completion dates for installation of the body on the cab and chassis.
- J. Beginning and completion dates for installation of the CNG system on the vehicle (if applicable).
- K. Ship date for each completed vehicle (cab and chassis with body) from sub vendor's body manufacturer to Denver and which location shipped to.
- L. Contractor and sub vendors local vehicle preparation time.
- M. Delivery of a completed vehicle meeting specifications to the City.

2.2 The Contractor shall contact all sub vendors:

The Contractor shall contact all sub-contractors providing accessories and equipment for the vehicle (s) and provide the sub-contractors with the a list of all accessories and equipment, manufacturer's order confirmation, order number, vehicle specifications, build date and delivery date to dealer from the vehicle manufacturer on the ordered vehicle. It is the primary selling dealer's responsibility to assure that the sub-contractors orders the accessories and equipment and has the items in stock and is prepared to install the accessories and equipment items when the vehicle arrives at the dealership.

Rush Truck Center

3.0 Basic Requirements, or approved equal.

When a brand/model is referenced in the specifications unless it is stated as "No Approved Equal" it is only a statement of expected quality, information on alternative products shall be provided with the bid so a full technical comparison can be made of the product submitted as an "approved equal".

3.1 Basic Vehicle or Approved Equal:

	Description of Equipment	Offered Equipment	Cost
A.	The below specification are general guide lines for a complete small barrel loader trash truck the combined weight of the cab & chassis, body and trash payload to not exceed 33,000-lbs but come as close as possible to maximizing the full weight capacity of the vehicle with maximum payload for "Best Route Efficiency".		
B.	Cab over engine, Kenworth K270 or Peterbilt 220 or approved equal, 2-man capacity, narrow cab forward single axle design. 1. Sit-down right side operator controls, 2. Single axle 33,000 lb. minimum GVWR (plate certified), 3. Wheelbase approximately 146-inch, appropriate for small rear loader body: inches, 4. Effective cab to axle approximate 134-inch, clean, appropriate for rear loader trash body. 5. After frame 36" minimum 6. Front tire cut angle 55° 7. Wall-to-wall turning diameter 54 ft. or better left and right 8. Both the cab and chassis and body vendors shall verify wheelbase and weight rating is appropriate for truck and specified body for the small rear loader application.	Make: <u>Peterbilt</u> Model: <u>220</u> Left Side: Yes <input checked="" type="radio"/> No <input type="radio"/> RH Rating: <u>33,000</u> lbs Wheelbase: <u>168</u> " C to A: <u>131</u> " A F: <u>72</u> " Cut Angle: Left <u>55</u> ° Right <u>55</u> ° Turn Dia.: Left <u>26.4</u> ft Right <u>26.4</u> ft <input checked="" type="radio"/> Yes No	\$ <u>82,546</u>
C.	The right side operator configuration is very important for operator comfort and efficiency. The operator position shall accommodate operators of various physical sizes providing good visibility, steering wheel/belly clearance, and shoulder width room. Also all the controls for operating the attached equipment shall be in an ergonomic layout/configuration that promotes minimal operator movement, operator comfort and operation efficiency.	<input checked="" type="radio"/> Yes No	
D.	Frame: 1. Rating 33,000-lbs. GVWR or better minimum, 2. Heavy-duty 120,000-psi full channel heat-treated steel, with main frame 1,938,000 in-lb. RBM minimum.	Frame Rating: <u>33,00</u> -lbs Yield Strength: <u>120,000</u> psi Section Modulus/rail: <u>11.7</u> in ³ Frame RBM/rail: <u>1,400,000</u> lbf-in	\$ <u>N/C</u>

3.1 Basic Vehicle or Approved Equal Continued			
	Description of Equipment	Offered Equipment	Cost
E.	<p>Component Service:</p> <ol style="list-style-type: none"> All components that require regular servicing shall be easy to access and be located as much as possible to protect the components from road splash. Access to rear engine mounts or transmission removal should not require the removal of electrical wiring, hydraulic hoses, air tanks or air dryers. Air dryer shall be easy and quick to access for servicing. 	<p><input checked="" type="radio"/> Yes No</p> <p><input checked="" type="radio"/> Yes No</p> <p>Mounting Location: <u>Under Cab</u></p>	<p>\$ <u>N/C</u></p>
F.	<p>Towing Provisions:</p> <ol style="list-style-type: none"> Tow hooks, two front frame mounted. Air brake 1/4" female Type "C" steel quick-connect hook up system on vehicle for wrecker air brake connection. Connector shall be equal to: Camel PN 61-523 or Amflo PN C2 or Schrader PN 3504. "Reference Only". Quick-connectors shall be accessible and protected but shall not stick out where they could get damaged. A check valve shall be provided at the vehicles air tank to prevent air loss. 	<p><input checked="" type="radio"/> Yes No</p> <p>Make: <u>Paccar</u> Model: <u>STD</u></p> <p><input checked="" type="radio"/> Yes No</p> <p><input checked="" type="radio"/> Yes No</p>	<p>\$ _____</p> <p>\$ <u>150</u></p>
G.	<p>Keying:</p> <ol style="list-style-type: none"> Keys keyed alike Ignition, Door, (same) and Toolboxes (same), 2 standard sets per vehicle. Additional 5 key sets If the City has similar make and model trucks in fleet the trucks shall be keyed the same as existing trucks. 	<p>Not Available</p> <p>Cost for 5 additional set of keys: \$ _____</p> <p><input checked="" type="radio"/> Yes No</p>	<p>\$ NC</p> <p>\$ _____</p> <p>\$ _____</p>

3.2 Engine or "Approved Equal"

	Description of Equipment	Offered Equipment	Cost
A.	<p>Engine: Diesel turbocharged Cummins ISB 6.7L, diesel, rated at approximately 250 hp @ 2,300 rpm, torque approximately 660 lb/ft @ 1,600 rpm, 2,600 rpm governed includes: Engine shall be appropriate for the small barrel loader trash truck application</p> <ol style="list-style-type: none"> 1. Engine shall utilize DEF (diesel exhaust fluid) to meet current and 2014 EPA regulations and reduce NOx and "Green house Gas emissions. 2. Engines shall be electronically controlled with following components: <ol style="list-style-type: none"> a. Engine protection system to monitor low oil pressure, high coolant temperature and low coolant level that will prevent component damage with manual over-ride on truck engine: b. Low oil pressure. c. High oil temperature. d. High coolant temperature. e. Low coolant level. f. High transmission oil temperature. g. Idle shutdown timer. h. Speed limiter top gear and cruse. 3. Computer controlled fast idle and PTO protection. 4. Thermos bottle stopper-type dipstick. 5. Magnetic drain plug. 6. Alternator 160-amp. 7. Starter 12v with over-crank protection. 	<p>Make: <u>Paccar</u> Model: <u>PX-7</u> HP: <u>250</u> @ <u>2400</u> rpm Torque: <u>660</u> @ <u>1600</u> rpm</p> <p>Emissions Rating: <u>Tier 4</u> Meets 2014 "Green House Emissions": <input checked="" type="radio"/> Yes No</p> <p><input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No</p> <p>Make: <u>Bosch</u> Model: <u>160A</u> Make: <u>Paccar</u> Model: <u>D61-1001-001</u></p>	<p>\$<u>1214</u></p>
B.	<p>Filtration:</p> <ol style="list-style-type: none"> 1. Oil: Fleetguard LF3000 full flow/bypass oil filter. 2. Fuel: Racor 690RP12 fuel/water separator with thermostatically controlled fuel line heater. 	<p>Make: <u>Paccar</u> Model: _____ Make: <u>Paccar</u> Model: <u>K95</u></p>	<p>\$ <u>N/C</u> \$ <u>65</u></p>
C.	<p>Engine Air Intake:</p> <ol style="list-style-type: none"> 1. The air intake shall be on the far left side of the vehicle at cab height. 2. The air intake shall be positioned so that it can not draw in exhaust gases. 3. Air filter dual element dry type with air inlet restriction indicator located in cab 	<p><input checked="" type="radio"/> Yes No RH Side <input checked="" type="radio"/> Yes No</p> <p>Make: <u>Paccar</u> Model: <u>STD</u></p>	<p>\$ <u>N/C</u></p>

3.2 Engine or "Approved Equal" Continued			
	Description of Equipment	Offered Equipment	Cost
D.	Exhaust Meeting 2015 Tier 4 EPA Standards: 1. Exhaust discharge shall be on the opposite side from the driver's station to reduce exhaust getting into the cab. 2. The exhaust after treatment device shall be installed so as to not obstruct maintenance/repairs underneath the truck. 3. Maximum exhaust system height shall not be higher than the highest point on the body or truck. 4. Horizontal with a vertical chrome stack and stainless steel exhaust guard that will easily fit up to Denver's exhaust gas evacuation system. 5. Exhaust discharge shall be above roofline and exhaust gases shall not discolor the body or be drawn into the operator's cab.	Trap Make: <u>Paccar</u> Model: _____ Location: <u>LR of Cab</u> <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>
E.	Fuel tank: 1. Fuel tank 45-gallons minimum with non-slip step in tank shall be mounted on right side of chassis to provide step and platform for accessing the body clean-out door. 2. The tank shall frame mounted. 3. Fuel tank may be combined with body supplier's hydraulic tank.	Size: <u>45</u> gallons Location: <u>L.H. Boc</u> <input checked="" type="radio"/> Yes <input type="radio"/> No <input type="radio"/> Yes <input checked="" type="radio"/> No	\$ <u>N/C</u>
F.	Diesel Enhancement Fluid Tank: 1. Location behind fuel tank. 2. Size 6.5-gallons minimum. 3. Tank fill opening shall be easily identified as "DEF Fluid Only" and shall not accept the entrance of a standard diesel fuel nozzle.	Location: <u>BOC Above frame rail</u> DEF Tank Volume: <u>8.4</u> gallons <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>
G.	Coolant Hoses: 1. Gates Blue Stripe hoses 2. With constant torque hose clamps.	<input type="radio"/> Yes <input checked="" type="radio"/> No <input checked="" type="radio"/> Yes <input type="radio"/> No	\$ <u>N/C</u>
H.	Fan: 1. Fan clutch heavy-service-duty with automatic fan control. 2. The fan shall operate off of engine coolant and transmission coolant temperature.	Make: <u>Paccar</u> Model: <u>140241 PAC</u> <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>
I.	Air compressor: 1. 18.7-cfm.	Make: <u>WABCO</u> Model: <u>18.7</u> Capacity: <u>18.7</u> cfm	\$ <u>N/C</u>

3.2 Engine or "Approved Equal" Continued			
	Description of Equipment	Offered Equipment	Cost
J.	<p>Cold weather starting aids on truck engine. "No Approved Equal"</p> <ol style="list-style-type: none"> Block heater, Phillips "Zero-Start" 120vAC, 1500 Watt, engine coolant temperature controlled to: <ol style="list-style-type: none"> Turn "on" at 40°F engine coolant temperature. Turn "off" at 55°F engine coolant temperature. The plug-in station shall have 2 LED indicator lights to: <ol style="list-style-type: none"> Light when plugged into "hot line" to show "hot line is energized. Light when engine coolant drops below 40°F. Plug-in shall be mounted below driver's door, protected from mechanical and weather damage. Heater plug shall be a male standard grounded 15 amp rated plug. A decal or information plate shall be provided describing how the system functions. The decal/plate shall be heavy-duty UV protected and capable of withstanding pressure washing and other normal vehicle functions. Cold weather starting assist (no either allowed). 	<p>Make: <u>Phillips</u> Model: <u>1000</u></p> <p>On Temperature: _____ Off Temperature: _____</p> <p>Yes <input type="radio"/> No <input checked="" type="radio"/></p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p>Location: <u>LH under cab</u></p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p>Type: <u>Cold start engine grid HTR</u></p>	<p>\$ <u>50</u></p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p>

3.3 Transmission and Drivetrain

	Description of Equipment	Offered Equipment	Cost
A.	<p>Transmission shall be an Allison New World 3500RDS-P with PTO, wide ratio, 5-speeds minimum with the following components:</p> <ol style="list-style-type: none"> Transmission and rear differential gearing shall be optimized for refuse operation and "Best" fuel economy. Transmission interface wiring for Allison MD/HD transmission. Electric push-button transmission controls shall be located in an easy to access location TranSynd TES 295 automatic transmission fluid. Allison High-Capacity filters for extended drain interval of 75,000 miles or 36 months. Transmission water-to-oil cooler. Remote mounted transmission filter. Magnetic drain plug. 	<p>Make: <u>Allison</u> Model: <u>3500 RDS-P</u></p> <p>Speeds: <u>6 SP EEO</u></p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p> <p><input checked="" type="radio"/> Yes <input type="radio"/> No</p>	<p>\$ <u>7483</u></p> <p>\$ <u>N/C</u></p>

3.3 Transmission and Drivetrain Continued			
	Description of Equipment	Offered Equipment	Cost
B.	Power Take Off (PTO) 1. Transmission direct mounted Chelsea 890 series with hydraulic pumps direct mounted to Chelsea 890 PTO at rear of the transmission. 2. PTO control electrically actuated from inside cab. 3. PTO speed limiter shall be connected to the engine computer not to an external overspeed box (EOS). 4. PTO shall efficiently operate all hydraulic systems at engine "low idle" 750 rpm or less. Increasing engine speed above 800 rpm shall not improve hydraulic operations.	Furnished by Body Builder Make: _____ Model: _____ Location: _____ Yes No Yes No Yes No PTO Idle rpm: _____	\$ <u>N/A</u> \$ <u>67</u> \$ <u>N/C</u> \$ <u>N/A</u>
C.	Automatic Work Brake Hold Activated with: 1. Manually very easy to access button or switch.	Yes <input checked="" type="radio"/> No	\$
D.	Rear Axles: 1. Eaton single reduction, capacity 21,000-lbs. de-rated to 16,000 lbs 2. Oil Pump 3. Axle ratio for best fuel economy with an approximate 65-mph top speed. 4. Oil seals, Union 76 Triton EP 75W-90 synthetic gear lubricant. 5. Magnetic drain plug.	Make: <u>Dana Spicer</u> Model: <u>P22060S</u> Yes <input checked="" type="radio"/> No Top Speed: <u>65</u> mph level Gear ratio: <u>6.50</u> <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>
E.	Front Axle: 1. Eaton, capacity 12,000-lbs. de-rated to 10,000 lbs with oil seals and Union 76 Triton EP 75W-90 synthetic gear lubricant.	Provide specs: Make: <u>Dana Spicer</u> Model: <u>E12021</u> Capacity: <u>12000</u> #	\$ <u>N/C</u>
F.	Springs: 1. Front leaf with graphite impregnated spring pin bushings. Front: capacity 12,000-lbs. minimum. 2. Rear leaf with torque arm Reyco model 79 Rear: capacity 21,000-lbs. de-rated to 16,000 lbs	Make: <u>Paccar</u> Model: <u>Taper Leaf</u> Capacity: <u>12000</u> - lbs Make: <u>Reyco</u> Model: <u>79</u> Capacity: <u>21000</u> - lbs	\$ <u>N/C</u> \$ <u>N/C</u>
G.	Brakes: 1. <u>Rear:</u> Eaton, S-cam, (16.5" x 5" front, 16.5" x 7" rear) extended service brakes with outboard mounted cast iron drums, dust shields, non-asbestos brake block. 2. <u>Front: Air Disc Front Brakes – Bendix ADB22X</u> 3. Brake spiders shall be heavy-duty design with fasteners in all possible locations.	Make: <u>Bendix</u> Model: <u>Aircam</u> Size: Front: <u>Disc</u> Rear: <u>16.5 x 7</u>	\$ <u>N/C</u>

3.3 Transmission and Drivetrain Continued			
	Description of Equipment	Offered Equipment	Cost
H.	<p>Anti-Lock Brake System / Automatic Traction Control system:</p> <p>1. Anti-Lock Brake System (ABS): Eaton 4S/4M with ATC, 4-channel with (4 sensors & 4 modulators) and 5-9 psi crack pressure relay valve.</p> <p>2. Automatic Traction Control (ATC) shall work in conjunction with the Eaton ABS brake system in low traction situations limiting torque to least loaded tire allowing most loaded tire to receive torque and pull the vehicle. The ATC system in conjunction with the Interaxle Driveline Lock shall provide traction control very similar to the Driver Controlled Differential Lock system.</p> <p>3. Air lines shall be color-coded nylon type.</p>	<p>Make: <u>Meritor</u> Model: <u>WABCOEBS</u></p> <p><input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No</p>	<p>\$ <u>N/C</u></p> <p><u>\$N/C</u></p> <p>\$ <u>N/C</u></p>
I.	<p>Air Dryer, (No Approved Equals)</p> <p>1. Bendix AD-IP with heated steel reservoir, automatic moisture ejector and cable operated air tank drain valves accessible from outside of vehicle.</p> <p>2. Air dryer shall be installed on the outside of the frame rail in a location that is easy access and does not exceed 15-minutes to service unit.</p>	<p>Make: <u>WABCO</u> Model: <u>SS1200</u></p> <p><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No</p>	<p>\$ <u>N/C</u></p> <p>\$ _____</p>
J.	<p>Driveline:</p> <p>1. Heavy-Duty suitable for trash application.</p> <p>2. Eaton Permalube type U-joints or approved equal.</p>	<p><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Make: <u>Dana</u> Model: <u>SPL 100</u></p>	<p>\$ _____</p>
K.	<p>Power Steering:</p> <p>1. TRW with 2-qt. reservoir.</p>	<p>Make: <u>LNFA</u> Model: <u>Lenk System</u></p>	<p>\$ <u>N/C</u></p>

3.4 Electrical System

	Description of Equipment	Offered Equipment	Cost
A.	<p>Alternator:</p> <p>1. Heavy duty, internally regulated, output 160-amp minimum.</p>	<p>Make: <u>Paccar</u> Model: <u>Brushed</u></p> <p>Rating: <u>160</u> amps</p>	<p>\$ <u>N/C</u></p>
B.	<p>Batteries:</p> <p>A. Two or three Group 31 batteries with a total CCA of 2,000 minimum.</p> <p>B. Battery location frame mounted left hand side.</p> <p>C. Battery shut-off switch easy to see and access.</p> <p>D. Jump start provision easy to access.</p> <p>E. Battery cables (00) stranded copper minimum.</p>	<p>Make: <u>Paccar</u> Model: <u>12v</u></p> <p>Quantity: <u>2</u> CCA's: <u>2000</u></p> <p>Location: <u>BOC</u></p> <p><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No</p> <p><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Size: <u>00</u></p>	<p>\$ <u>N/C</u></p>

3.4 Electrical System Continued			
	Description of Equipment	Offered Equipment	Cost
C.	Circuit Protection: 1. Circuit breakers with manual reset, no fuses. 2. Circuit breaker panel shall be easy to access. 3. Circuit breaker panel shall be clearly labeled for easy identification.	Yes No Yes No Yes No	\$ <u>N/C</u>
D.	Wiring: 1. Wiring shall be color coded with hot stamped wire numbers. 2. All wiring shall be run in sealed wiring looms to reduce corrosion from magnesium chloride products	Yes No Yes No	\$ <u>N/C</u>
E.	Body Builder's Junction Box 1. Body builder's junction box shall be provided. 2. Terminal shall be marked for easy identification.	Yes No Yes No	\$ <u>N/C</u>
F.	Back Up Alarm: 1. Back up alarm, 107 dB, SAE type B, fully sealed, back-up alarm system wired into vehicle's backup light system using OEM plug-in adapter. 2. The alarm shall be mounted out of the vehicle's rear wheel splash area.	Yes No Yes No	\$ <u>46</u>
G.	Cab and Chassis Lights: 1. Halogen sealed beam headlights, 12v. 2. Daytime running lights. 3. Wiring shall be sealed modular plug-in type. 4. Marker lights LED type.	Yes No Yes No Yes No Make: Paccar Model: STD	\$ <u>N/C</u> \$

3.5 Cooling System

	Description of Equipment	Offered Equipment	Cost
A.	Cooling system with coolant recovery tank capable of maintaining engine manufacturer's recommended operating temperatures at an elevation of 6,800' in 120° F low humidity ambient conditions shall be provided.	Yes No	\$ <u>N/C</u>
B.	Coolant protection shall be -34° F.	Protection Level: <u>-34</u> °	\$ <u>N/C</u>
C.	Fleetguard coolant filter WF2071.	Make: Paccar Model: <u>ACAR 928</u>	\$ <u>N/C</u>

3.6 Tires and Wheels

	Description of Equipment	Offered Equipment	Cost
A.	Tires: 11R22.5, tubeless, load range H. 1. Front: Michelin XZY-3, All-Position Tires 6,610 lb rated @ 120 psig 2. Rear dual: Michelin XZY-3 All-Position Tires 6,610 lb rated @ 120 psig	Make: <u>Michelin</u> Model: <u>XMulti EnergyZ</u> Make: <u>Michelin</u> Model: <u>xMulti EnergyZ</u>	\$ <u>95</u> \$ <u>190</u>
B.	Wheels: 1. Disc, 10-hole, Hub piloted type, Single nut, Meets ISO Standard 4107, size 22.5" x 8.25" 2. Aluminum 22.5x8.25 Milled not polished	Make: <u>Alcoa</u> Model: <u>LVI</u> Size: <u>22.5</u> x <u>8.25</u> Yes No	\$ <u>570</u>

3.7 Interior

	Description of Equipment	Offered Equipment	Cost
A.	Right side operating controls: 1. Vehicle operation shall be only from right side of vehicle. 2. Driver's controls shall be ergonomically laid out for maximum driver efficiency in operating the rear loader collection body. 3. Doors: a. Left and right doors shall be front hinged. b. Left and right doors shall have power full roll up/down windows. c. The left door shall have a lower door window to provide better visibility and safer operation.	Driving Location: <u>RH</u> side <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No	\$ <u>657</u> \$ <u>N/C</u> \$ <u>N/C</u>
B.	Seating 2 Person Cab shall be: 1. Driver's right seat shall be air suspension Bostrom, high back driver's seat, gray vinyl with cloth insert and armrests. 2. Passenger left side seat shall be 2-person bench with spring suspension mid-back seat, gray vinyl with cloth insert	Make: <u>Sears</u> Model: <u>C2</u> Make: <u>Paccar</u> Model: <u>2 Person</u>	\$ <u>N/C</u> \$ <u>N/C</u>
C.	Engine Cover "Doghouse" 1. The engine cover "doghouse" shall be designed to accommodate the ergonomic positioning of the rear loader body controls without obstructing operator vision. 2. The vehicle manufacturer shall work with the body supplier to assure that the controls are the most ergonomic possible to assure operator comfort and reduce repetitive motion injuries. 3. The City has operators of varying statures and adjustable controls will minimize on-the-job related physical problems. 4. The City, body vendor and the vehicle supplier shall mutually determine barrel loader control positions after Contract award.	<input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>

3.7 Interior Continued			
	Description of Equipment	Offered Equipment	Cost
D.	Required Submittals with Bid: 1. Requested information must be submitted with bid for evaluation. Failure to submit the requested information may make bid non-responsive. 2. Vendor shall provide with bid, drawings with dimensions and photographs of the proposed cab interior for review. 3. Interior right side dimensions measured: a. Belly Room: seat back to steering wheel. b. Leg Room: seat front edge to brake pedal. c. Head Room: seat cushion to ceiling. d. Torso Room: Width from door to doghouse or other obstruction. e. Seat fore/aft travel: f. Seat height travel: g. Steering Wheel Knuckle Clearance: distance to closest object h. Floor Height: measured ground to cab floor. i. Cab Step Heights: measured from ground. j. Steering Wheel Tilt and Telescoping: 4. Location of the transmission shifter: should not be obstructed by any rear loader body controls.	Provide Materials: <u>Side view of Truck</u> <input checked="" type="radio"/> Yes <input type="radio"/> No Seat full forward: <u>12</u> " Seat full back: <u>23</u> " Seat full forward: <u>14</u> " Seat full back: <u>22</u> " Seat full lowered: <u>49</u> " Seat full raised: <u>44</u> " Smallest measurement: <u>26</u> " Travel: <u>10</u> " Travel: <u>5</u> " Clearance: <u>5</u> " Height: <u>33.8</u> " 1 st Step: <u>14.1</u> " 2 nd Step: <u>26</u> " Tilt: <u>5</u> ° Telescoping distance: <u>N/A</u> "	
E.	Instrumentation: 1. Instrumentation shall include speedometer, engine hourmeter, tachometer, voltmeter, coolant temperature, oil temperature, oil pressure, fuel level and air pressure with low-pressure alarms (light, audible).	<input checked="" type="radio"/> Yes <input type="radio"/> No	\$ <u>N/C</u>
F.	Steering: 1. Steering controls shall comfortably accommodate operators of various sizes, from short and small to tall and larger. 2. Steering tilt easy to adjust 3. Telescoping easy to adjust,	<input checked="" type="radio"/> Yes <input type="radio"/> No Tilt: <input checked="" type="radio"/> Yes <input type="radio"/> No Telescoping: Yes <input checked="" type="radio"/> No Travel In-Out: _____ in	\$ <u>N/C</u>
G.	Upfitter's Switch Panel: 1. The vehicle manufacturer shall provide for the barrel loader body manufacture an upfitter's switch panel for automated rear loader body control switches. 2. The panel location shall be in an ergonomic location and shall not require more than 30° head movement and be within easy reach of driver's of various sizes and physiques. 3. The switch panel shall have permanently labeled and lighted rocker switches for all optional sundries equipment and lights etc.	Yes <input checked="" type="radio"/> No Yes <input checked="" type="radio"/> No Yes <input checked="" type="radio"/> No	\$ <u>N/A</u>

3.7 Interior Continued			
	Description of Equipment	Offered Equipment	Cost
H.	Floor Covering: 1. Floor covering shall be heavy-duty black rubber/vinyl flooring.	<input checked="" type="radio"/> Yes No	\$ <u>N/C</u>
I.	Windshield Wipers: 1. Wipers 2-speed self parking. 2. Intermittent wiper mode.	Speeds: <u>2</u> <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>
J.	Air Conditioning: 1. Factory installed cab R134A air conditioning 2. Cab shall be insulated to include floor, firewall, roof and walls.	Refrigerant Type: <u>R134A</u> <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>
K.	Radio: 1. AM/FM stereo with two speakers.	Make: <u>Paccar</u> Model: <u>Concert Class</u>	\$ <u>N/C</u>
L.	Fire extinguisher: 1. Extinguisher ABC, 5-lb. dry type rechargeable 2. Installed in cab. 3. Location labeled with 1" letters on outside of the cab.	Type: <u>Kiddie</u> Yes <input checked="" type="radio"/> No	\$ <u>N/C</u>
M.	Grab Handles: 1. One each side on exterior of cab for operator and passenger assist and one interior for passenger. 2. Grab handles shall provide adequate clearance to other objects to provide easy access and clearance to prevent pinch or other hazards.	<input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>

3.8 Exterior:

	Description of Equipment	Offered Equipment	Cost
A.	Vendor shall provide with bid drawings with dimensions and photographs of the proposed cab exterior including mirrors for review. Failure to submit the requested information may make bid non-responsive.	Provide Materials: <u>Front View of Truck</u>	\$ <u>N/C</u>
B.	Cab Design: 1. Heavy-duty type with steel or aluminum body. 2. High visibility tilt forward design. 3. Front hinged doors. 4. Low floor cab over with steps mounted to body. 5. Maximum step height 15".	Body Rating: <u>Tilt Cab</u> Body Material: <u>Steele</u> Yes No Yes No Step Height: <u>14.1</u> in	\$ <u>N/C</u>

3.8 Exterior Continued			
	Description of Equipment	Offered Equipment	Cost
C.	Paint: 1. Polyurethane paint equal to DuPont Imron 5000, "Bright White", applied following manufacture's procedures to include: 2. Color top coat, 2 coats, applied to all non-stainless steel components following manufactures procedures. 3. Removing all mill scale and slag. 4. Variprime 615S self-etching primer or approved equal. 5. Treating bare metal with manufacturer's conditioners and conversion coatings or approved equal.	Make: <u>Dupont</u> Type: <u>M887 EA</u> Color: <u>Ice White</u>	\$ <u>N/C</u>
D.	Engine Accessibility: 1. The engine shall be fully accessible and serviceable, 2. The cab shall tilt forward for access by easily operated momentary switch and 12v DC electric pump located on right side of vehicle.	<input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No	\$ <u>N/C</u>
E.	Mirrors: "No Approved Equal" 1. Rear view mirrors Moto Mirror Model 7-5400 "Flat Back Traditional" 7" x 16" motor head, remote, heated, stainless steel left and right mounted on the cab. 2. Convex 8" stainless steel mirrors mounted under primary mirrors. 3. A right hand down mirror shall also be provided to cover front and side blind spot for shorter drivers under 5'-6" tall. 4. Overall cab width including mirrors 112" maximum.	Overall mirror full extended width: <u>122.1</u> inches Overall mirror width with left side mirror folded in: <u>107</u> inches Make: <u>N/A</u> Model: _____	\$ <u>N/C</u> \$ <u>N/A</u>

VEHICLE SUB TOTAL COST Sum Sections 3.1 - 3.8	\$ <u>93,133</u>
---	------------------

4.0 Dealer Provided Optional Equipment

4.1 Electrical Systems:

- A. All non-factory wire connections (splices, connectors, etc.) shall be soldered and shrink tube insulated with adhesive/meltable sealant, thick wall polyolefin shrink tubing (3M EPS-300 or equal). No non-factory crimp connections allowed. No cutting or splicing into the factory wiring harnesses allowed.
- B. All accessories (strobe lights, operator controls, light bar, etc.) shall be wired through a 12-vDC constant-duty solenoid and controlled by bus bar mounted and permanently labeled auto-resetting circuit breakers. The solenoid shall be wired to the key switch.
- C. All dealer/vendor installed items, which require connecting into the vehicle's electrical system shall be done using an OEM factory modified wiring kit whenever possible.
- D. All non-factory wiring shall be encased in a totally sealed wiring harness (no plastic split loom) to prevent corrosion from magnesium chloride. The wiring harness shall be well secured to the truck with neoprene aircraft stainless steel tubing clamps. Rubber grommets shall be used at all areas where the wiring passes through areas that could damage the wiring. Unprotected wiring in any application is unacceptable.
- E. Electrical cables and wiring harnesses shall be neatly run and clamped with neoprene aircraft stainless steel tubing clamps. Clamp spacing shall not exceed 18-inches.
- F. Dielectric grease shall be applied to all electrical plug terminals and connections to reduce corrosion.

4.2 Fasteners:

- A. Grade 5 (SAE or USS) or 8.8 (metric) minimum, bolts, nuts, washers minimum. Vendor shall use Grade 8 or 10.9 for all critical areas or where good engineering practice suggests.
- B. All fasteners shall be zinc plated to prevent corrosion.
- C. Anti-Seize: all fasteners shall have Fel Pro C5A Anti-Seize compound applied before assembly to prevent corrosion, rusting, galling and aid in equipment servicing and repair.
- D. All fasteners shall be of appropriate length, diameter and strength (grade) for the application.
- E. Bolts and screws shall extend a minimum of 1-1/2 threads beyond the nut and maximum of 6 threads past the nut.
- F. Flat washers shall be used under bolt heads and nuts.
- G. Lock nuts (nylon insert, metal, slotted, castle nuts) shall be used lock-washers are not acceptable.

4.3 Hydraulic Systems:

- A. All hydraulic circuits shall be pressure relief protected.
- B. Hydraulic hoses shall be Parker ST 451 (tight bend radius) 2-wire braid hose meeting SAE-100R17 specifications where the hose meets operational criteria or approved equal.
- C. Hydraulic hoses shall have swivel fittings on both ends. Hose ends shall be located to facilitate easy component replacement.
- D. High-pressure hydraulic hose shall not be used for suction lines.
- E. Close/tight radius 90° elbow fittings shall not be used if short, medium or long drop steel stem 90° elbow fittings can be used. Over use of 90° elbows shall not be permitted.
- F. Hydraulic hoses and rigid lines shall be run parallel where possible; routing shall look neat and well planned.
- G. Rubber cushioned metal hydraulic clamps shall be used on all hydraulic ridged lines and hoses at proper intervals for supporting the line/hose 36" maximum distance. Clamps shall be securely mounted to the equipment.
- H. Hydraulic hoses and lines shall not be routed near exhaust, close to rotating components or over, around or through sharp edges. Rubber grommets shall be used at all areas where the hydraulic lines through areas that could damage the lines.
- I. Galvanized fittings and thread tape shall not be used.

- J. Hydraulic hoses shall be covered with protective spiral nylon anti-chaffing wrap or sock type protective sleeves at all areas where chafing/rubbing could cause premature wear/failure.
- K. Hydraulic oil tanks shall magnetic drain plug, oil level and temperature gauge.
- L. Hydraulic hoses over 4' long shall be labeled on both ends for easy identification.
- M. Shut off valves ¼-turn on each side of filter.

4.4 All fabricated parts, brackets etc. shall have all sharp corners, edges etc. radiused or rounded for safety.

4.5 Welds:

- A. All welds shall meet AWS (American Welding Society) standards for the type weld, material joined and welding method.
- B. Weld joints shall have proper design and fit for the application.
- C. Welds joints shall have proper penetration and be smooth in appearance with no undercuts or overlaps at edge of weld.
- D. Weld joints shall be properly prepared with cut ends ground to remove all slag, create a smooth surface and beveled end.

4.6 Compactor Barrel Loader Body or (Approved Equal)

When a brand/model is referenced in the specifications unless it is stated as "No Approved Equal" it is only a statement of expected quality, information on alternative products shall be provided with the bid so a full technical comparison can be made of the product submitted as an "approved equal".

	Description of Equipment	Offered Equipment	Cost
A.	<p>The below specification are general guide lines for a complete small barrel loader trash truck the combined weight of the cab & chassis, body and trash payload to not exceed 26,000-lbs but come as close as possible to maximizing the full weight capacity of the vehicle with maximum payload for "Best Route Efficiency". Furthermore:</p> <p>Manufacturer Qualifications:</p> <ol style="list-style-type: none"> 1. Units shall be completely assembled, mounted and ready for operation. Parts not detailed shall be constructed in accordance with the best standard practice of the industry at the time of construction. 2. Only new models in current production, which are catalogued by the manufacturer and for which printed literature and specifications are available, will be accepted. 3. The loader body shall be the product of a manufacturer actively engaged in the production of automated side loading refuse collection vehicles of this size and capacity as specified. 4. The City will consider only those bidders who can demonstrate that a minimum of 100 units have been manufactured and have been in use for (1) year. 5. Name (s) of users and contact personnel shall be supplied with bid. 6. All accessories not specifically mentioned herein, but necessary to furnish a complete unit ready for use shall also be included. 7. Fleet Management along with the Local Dealer will identify specific parts needed to be stocked on the Local Dealers shelf. Manufacturer will supply these parts for the local dealer prior to delivery. 	<p>Yes X No</p> <p>Yes X No</p> <p>Yes X No</p> <p>Yes X No</p> <p>Yes X No</p> <p>Yes X No</p> <p>Yes X No</p>	
B.	<p>A current year, new narrow 86" wide maximum rear loader refuse truck with maximum cubic yard capacity for the 26,000-lb class 6 truck rating with heavy-duty commercial package or approved equal, installed with the following equipment: The truck and body at full load compaction shall be as close to 26,000-lbs as possible without exceeding 26,000-lbs. Trash capacity/weight shall be a prime consideration in determining the best trash body for this application</p>	<p>Make: <u>Amrep, Inc.</u> Model: <u>HX450ASL</u> Body Width: <u>96</u> inches Body Capacity: <u>14</u> yds³ Body Weight Empty: <u>11450</u> lbs Compaction weight/yard³: <u>70,000</u> lbs Weight of Body with Trash @ full load: <u>22,000</u> lbs</p>	<p>\$ <u>See Quote</u></p>

4.6 Compactor Barrel Loader Body or (Approved Equal) Continued			
	Description of Equipment	Offered Equipment	Cost
C.	Vendor shall within 45 days of contract award submit drawings to the City showing the placement of all major components to include but not be limited to: front/rear bumpers, air filter, exhaust system with trap, air dryer, air tanks, fuel tank, battery box, daily fluid checks/fills, rear riding steps and hand holds, rear packer body controls, hydraulic tank, hydraulic valves, electrical junction box, access doors, tool holders etc.	Provide specs: <u>Comply</u> _____ _____ _____	<u>\$See quote</u>
D.	<p>The compactor body shall be:</p> <ol style="list-style-type: none"> Capacity, 12 cu yds excluding loading hopper, approximate Body design, curved sides mounted length wise on the truck chassis setup for right side barrel loading. Hopper floor shall be level with the main body floor to allow full ejection of all materials. Material: <ol style="list-style-type: none"> Body Dimensions and Lights <ol style="list-style-type: none"> Hopper capacity, 5 cubic yards, approximate Maximum width of the body and pick up arm in down pick up position shall not exceed 96" width. No portion of the arm in down pick up position shall stick out past the truck or trash body. The pick up arm shall be "zero grab" capable, pick up barrels at the side of the truck without extending the pick up arm. Arm has option to stow clamps in both the lower and upper position. Length of body and hopper = 220" approximate Body height above ground, 131" maximum Height lift arm dump 30-90-gal. above ground, shall not exceed 131". Lift arm reach, 0" to 96" minimum full extension to center of barrel. The grabber shall grip containers at a height of 24" from bottom of the barrel Body Materials (minimum requirements) <ol style="list-style-type: none"> Hopper Floor: 1/4" Hardox 450 steel 180,000 psi yield. Hopper Sidewall: 4 mm Hardox 450 steel 180,000 psi yield. Body Floor: 3/16" Hardox 450 steel 180,000 psi yield. Body Sidewalls: 1/8" Hardox 450 steel 180,000 psi yield. Body Roof: 1/8" Hardox 450 steel 180,000 psi yield. 	<p>Accurate Data Must Be Provided Body Capacity: <u>12</u> yds³ Body Shape: <u>Round Rectangular</u></p> <p>Level Floor: Yes <input checked="" type="checkbox"/> No</p> <p>Note: Trash Does not fall on Hopper Floor.</p> <p>Hopper Capacity: <u>5</u> yds³ Body Width: <u>96</u> in Total Width in Down Pick Up Position: <u>102</u></p> <p>Body Length: <u>220</u> in Body Height <u>131</u> in Max 90 gallon barrel dump height: <u>131</u> in</p> <p>Maximum arm reach: <u>96</u> in</p> <p>Grab Height: <u>12-21</u> in Lowest height depends on how far the arm is.</p> <p>Steel Specs: Steel Type: <u>Hardox</u> Thickness: <u>1/4"</u> Yield: <u>180,000</u> psi Steel Type: <u>Hardox</u> Thickness: <u>4mm</u> Yield: <u>180,000</u> psi Steel Type: <u>Hardox</u> Thickness: <u>3/16"</u> Steel Type: <u>Hardox</u> Thickness: <u>1/8"</u> Yield: <u>180,000</u> psi Steel Type: <u>Hardox</u> Thickness: <u>1/8"</u></p>	

	<p>6) Tailgate: 1/8" Hardox 450 steel 180,000 psi yield...</p> <p>7) Body Posts: 2" x 2" x 1/4" formed steel, 2 required, 1 at front of the body/hopper and 1 at rear of body/door</p> <p>8) Longitudinal Member: 8" x 2" x 0.180" wall structural steel tube, 2 required, 1 each on lower side of body extending from front to rear body posts</p> <p>9) Cross Members: 5 required minimum a. 2 members: 6" x 2" x 3/16", b. 1 member: 8" x 2" x 3/16" c. 2 members: 2" x 2" x 3/16" d. Cross members shall be on lower side of body extending from front to rear body posts and full body width e. Cross members shall be fully and continuously welded to the hopper and body floors</p> <p>10) The body design and construction shall ensure that "No" body or component distortion occurs when the body is repeatedly packed at full rated capacity.</p> <p>11) Lights mounted on side of body (Truck Lite #10250Y). Three per side required.</p>	<p>Yield: <u>180,000</u> psi Steel Type: <u>Hardox</u> Thickness: <u>1/8"</u> Yield: <u>58,000</u> psi Steel Type: * Thickness: <u>3/16"</u> Yield: <u>58,000</u> psi *Structural Tubing A500 Grd. B Steel Type: * Thickness: <u>1/4"</u> Yield: <u>58,000</u> psi *Structural Tubing A500 Grd. B Steel Type: <u>Structural Tubing A500 Grd. B</u> Size: <u>6"</u> x <u>2"</u> x <u>3/16"</u> Size: <u>8"</u> x <u>2"</u> x <u>3/16"</u> Size: <u>2"</u> x <u>2"</u> x <u>3/16"</u></p> <p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Note: Rounded Body allows the cross members between longitudinals.</p> <p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/></p> <p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/></p> <p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/></p>	
E.	<p>Hopper:</p> <p>1. The hopper capacity shall be approximately 5 yds³</p> <p>2. Hopper floor shall be flat</p> <p>3. The hopper floor rear section (entrance into body) shall extend out into the main body approximately 18" past the vertical front wall to provide additional wear resistance.</p> <p>4. Hopper Sump: a. The hopper on its front side shall have a transverse sump to allow cleaning out of debris that accumulates behind the packer blade and collect liquids. b. Clean-out doors on both sides of the body c. Hopper sump doors shall be approximately 14" x 13" d. Hopper sump door hinges shall be hinged and corrosion resistant e. Doors shall be sealed to prevent liquids from leaking.</p>	<p>Hopper Capacity: <u>5.5</u> yds³ Yes <input checked="" type="checkbox"/> No <input type="checkbox"/></p> <p>Floor Distance into Body: <u>24</u> in</p> <p>Sump Size: <u>10"</u> x <u>4"</u> average x 90" Sump Volume: <u>16</u> gallons Note: Amrep design has four doors. Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Clean Out Door Size: <u>10"</u> x <u>36"</u> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Material: <u>Mild steel</u></p>	<p>\$ <u>N/C</u></p>

	<p>f. The door latches shall be easy and quick to operate. g. A clean out tool with easy to use and access storage brackets shall be provided. Exact location shall be mutually determined at installation</p>	<p>Yes <input checked="" type="checkbox"/> No Latch Type: <u>Over center and</u> rubber tension straps. Yes <input checked="" type="checkbox"/> No</p>	
<p>F.</p>	<p>Hopper Cover: 1. A hopper cover shall be provided that seals the hopper/body area and prevents loose material from being sucked out of the hopper/body when the trash truck is traveling along roads at City or highway speeds. 2. The hopper shall hydraulically fold out of the hopper front wall to seal the hopper area. 3. The hopper cover shall be metal and the cover needs to be easy to change out/repair in case of damage 4. When the hopper cover is in the down/hopper covered position the loading functions shall be disabled to prevent dumping on top of the hopper cover.</p>	<p>Yes <input checked="" type="checkbox"/> No Describe Function: <u>Folds out of Hopper front wall</u> Material: <u>12 gauge steel skin over steel frame.</u> Yes <input checked="" type="checkbox"/> No</p>	<p>\$ <u>N/C</u></p>
<p>G.</p>	<p>Packing Mechanism: 1. Packer plate shall be actuated by horizontally opposed and crossed telescopic hydraulic cylinders. 2. Pack panel shall have an auto-pack that is actuated with a completed cycle of the pick up arm. 3. The auto-pack shall be able to be easily set on the main control panel for: a. Pack every pick up cycle b. Pack every 3rd pick up cycle 4. A container dump lock out shall prevent dumping behind the packer plate. 5. The pack panel shall: a. The packer panel face and top surface shall be ¼" AR400 minimum for wear resistance. b. The packing panel shall exert 70,000-lb force minimum across its entire face to highly compact the load. c. For packing the panel shall travel into the main body a sufficient distance for proper packing and to prevent trash fall-back into the hopper. 6. Packer panel follower plate shall be: a. Multi-piece folding design that retracts/stores inside the hopper on the front wall of the hopper. b. The follower plate shall utilize heavy-duty greaseless piano type hinges between the follower plates c. Constructed with a steel frame, 10-gauge steel, 50,000 psi</p>	<p>Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No Switch Location: <u>Main Control Panel</u> Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No Material: <u>Hardox</u> Thickness: <u>1/4"</u> Packing Force: <u>70,000</u> lbs/in² Pack Distance into the Hopper: <u>24</u> in Number of Panels: <u>2</u> Storage Location: <u>Inside Hopper</u> Hinge Type: <u>Piano Type</u> Lubrication Required: Yes No <input checked="" type="checkbox"/> Thickness: <u>3/8"</u> Yield: <u>50,000psi</u></p>	

Reinforced Steel Plate, no frame required.

	<p>yield minimum.</p> <p>d. The cover sheet shall be 10-gauge steel, 50,000 psi yield minimum and easy to replace when damaged.</p> <p>e. The follower panel plates shall run inside wall mounted tracks and a center support using permanently lubricated rollers for reduced maintenance.</p> <p>f. The packer follower plate shall have a protective shield that will keep trash from bypassing between the packer panel and the follower plate, get in front of the pack panel where the compaction cylinders are housed.</p> <p>7. Hydraulic cylinders that are in a location where they can be in contact with the trash or are subject to mechanical damage shall have nitrated piston rods with a positive-contact M2 tool steel scraper blade to shave off burrs, trash and other materials that could damage the cylinder seals, packing or other cylinder components, or "approved equal design"</p> <p>8. Cylinders shall be single stage, with packing force as follows: 1st stage: 70,000 lbs minimum.</p> <p>9. Packing mechanism shall be designed so that no contact to the tailgate can occur during loading or ejecting of refuse.</p> <p>10. The packing panel shall be reinforced with formed cross members so no distortion occurs during operation.</p> <p>11. Packer Panel Track: a. The pack panel shall ride on 1/4" AR500 abrasion resistance steel for wear resistance from constant packing. b. The wear strips shall be easily replaceable.</p>	<p>Thickness: <u>3/8"</u> Yield: <u>50,000psi</u> How Fastened: <u>Studs in blade, plate bolted down.</u> Roller Type: <u>Steel</u> Roller Number: <u>2</u> Size: <u>2"</u> dia x <u>6"</u> w & <u>1.25"</u> d. x <u>5"</u> w. Permanently Lubricated: Yes No <input checked="" type="checkbox"/> X Shield Material: <u>Rubber Wiper</u></p> <p>Make: <u>Amrep</u> Model: <u>509-2362</u> Cylinder Warranty: <u>2 Years</u> Rod Material: <u>Chrome Plated Steel Rod</u> Scraper Blade Material: <u>Dual Floating Bronze</u> offered "As Equal" cylinder.</p> <p>Force: <u>70,000</u> psi-lb force @ <u>2,000</u> psi Yes <input checked="" type="checkbox"/> X No</p> <p>Yes <input checked="" type="checkbox"/> X No</p> <p>Material: <u>AR500</u> Thickness: <u>1/4"</u> <u>5/16-3/8"</u> Chromium sides and bottom. Yes No How Replaced: <u>Torch out and weld in.</u></p>	
<p>H.</p>	<p>Compacted Trash Tip to Dump System:</p> <p>1. Load ejection shall be a Tip to Dump system which includes two (2) lift cylinders to raise the Packer Body to a desired tip angle that will fully eject the load to include: a. Truck engine increases rpm to approximately 1,200 rpm for Tip to Dump cycle only. b. Truck pulls forward sufficient distance to provide a clear dump area behind the truck for a second ejection push.</p> <p>2. Lift cylinders shall have three stages, with packing force as follows: a. 1st stage: 31,792.50 lbs. b. 2nd stage: 19,232.50 lbs. c. 3rd stage: 9,812.50 lbs</p> <p>3. Dump Cycle Time: a. Dump Cycle time from down position (body hoist cylinders fully collapsed) to dump mode (body up devoid of refuse) and back</p>	<p>Yes <input checked="" type="checkbox"/> X No Describe Tip to Dump Cycle: <u>Hoist cylinders raise body to 42 degrees,</u> <u>Truck Engine Speed @ Ejection: 1,200 rpm</u></p> <p>1st Stage Force: <u>31,792.5</u> psi-lb force @ <u>2000</u> psi 2nd Stage Force: <u>19,232.5</u> psi-lb force @ <u>2000</u> psi 3rd Stage Force: <u>9,812.5</u> psi-lb force @ <u>2000</u> psi</p> <p>Yes <input checked="" type="checkbox"/> X No</p>	<p>\$ <u>N/C</u></p>

NOTE: AMREP does offer this in a Full Eject with little weight difference and no additional cost.

to down position shall be achieved in 4 minutes or less.			
I.	Tailgate:		\$ <u>N/C</u>
	1. Operation, lock/unlock, raise and lowered using two hydraulic cylinders, minimum.	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	2. Hydraulic operated locks :	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	a. Locks at 5 tailgate point's minimum shall secure tailgate door lock.		\$ <u>N/C</u>
	b. Outside of body tailgate locks: 2 required		\$ <u>N/C</u>
	c. Inside body side locks 4 required, 2 per side		
	d. Bottom tailgate locks 3 required		
	e. Locks shall automatically actuate when rear door lift cylinders are actuated.		\$ <u>N/C</u>
	3. Tailgate shall be strong enough not to deform or crack during use.	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	4. Tailgate shall have an easy to replace one-piece rubber gasket. The gasket shall extend across the entire bottom and up the sides a minimum of 24".	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	5. Tailgate trough/catch basin shall be provided to catch liquid leakage.		\$ <u>N/C</u>
	a. The trough shall self empty when the tailgate is raised for load ejection.	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	b. A 2" NPT dia bung shall be provided for draining liquids without raising the tailgate.		\$ <u>N/C</u>
	6. Tailgate unlatched alarm; light/buzzer shall indicate when door is unlatched.	Yes <input checked="" type="checkbox"/> No	
7. Tailgate safety prop rods shall be provided to hold the tailgate manually open.	Yes <input checked="" type="checkbox"/> No		
8. Tailgate in open position maximum height to be no greater than 19' 11".	Yes <input checked="" type="checkbox"/> No		
9. Tailgate hydraulic lines shall have restrictors to prevent sudden tailgate descent.	Yes <input checked="" type="checkbox"/> No		
10. Underride protection, shall be bolt on type, DOT approved.		\$ <u>N/C</u>	
11. All tailgate hinge points shall be easily greaseable from the ground.	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>	
12. Center mounted Truck Lite LED brake light shall be provided.	Make: <u>Truck Lite</u> Model: <u>91 (7"LED)</u>		
13. Whelen Model L360 Super LED 360° beacon with branch guard L360BGB, (1) required shall be mounted on top of tailgate.	Make: <u>Whelen</u> Model: <u>L360</u>	\$ <u>N/C</u>	
	Make: <u>Whelen</u> Model: <u>IONSMC-LED</u>		
14. Truck Lite (#15040) License plate light and #15 License Plate bracket located on tailgate.	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>	
	Location: <u>Below tailgate on lightbar.</u>		

	<p>15. Tailgate mounted safety lights sides shall be</p> <p>a. Whelen IONSMC -Wide Angle LED color (Amber) safety lights (4 required).</p> <p>b. The lights shall be located 1/3rd and 2/3rd up the tailgate just inside the outer edge of the tailgate on each side</p> <p>16. a. Clearance Light (Truck Lite #10250R) located on top of tailgate. Three each required.</p> <p>17. a. Rear brake lights (Truck Lite, Super44 44302R) located at bottom of tailgate – 4 required</p> <p>18. a. Back-up lights (Truck Lite, Super44 44206C) located at bottom of tailgate -2 required</p>	<p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p>	
<p>J.</p>	<p>Container Loading System:</p> <p>1. Orientation, right or curb side of body.</p> <p>2. Loading arm system shall consist primarily of an extension/retraction arm, a container gripping system and a tracked lift/lower and dump track system or an approved equal with zero (negligible) barrel kick out. The truck will pick up in very narrow alleys with close obstructions on sides and overhead.</p> <p>3. A drawing showing the full sweep arc for a 90-gallon plastic barrel shall accompany the bid. The drawing shall show the sweep of all corners of the plastic barrel. Failure to provide an adequate drawing may make the bid non-responsive</p> <p>4. Performance:</p> <p>a. Cycle time</p> <p>1) Retracted zero reach: 8 to 10 seconds, from pick-up through raise, dump, lower, and release.</p> <p>2) Full 84" reach: 15 seconds, from pick-up through raise, dump, lower, and release.</p> <p>b. Container grippers shall pick up all City used 32, 60, standard City 95 –gallon and 110-gallon plastic containers with a 36" clearance circle around the container.</p> <p>c. The container dump movement shall keep the trash barrel essentially level with no bottom end of container kick out that could damage adjacent property (zero clearance). The truck will pick up in very narrow alleys with close obstructions on sides and overhead</p> <p>d. The pick up arm shall be "zero grab" capable, pick up barrels at the side of the truck without extending the pick up arm.</p>	<p>Orientation Side: <u>Curbside</u></p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Retracted Cycle Time: <u>8-10</u> seconds</p> <p>Full Reach Cycle Time: <u>8-10</u> seconds</p> <p>Container Sizes Grippers will safely and efficiently <u>32, 60, 95 AND 110 Gallon.</u></p> <p>Clear Radius Required: <u>36"</u> inches</p> <p>Kick Out: <u>Zero</u> inches</p> <p>Yes <input checked="" type="checkbox"/> No</p>	<p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p>

e. Hydraulic inhibitor shall prevent dumping on top of the hopper cover.	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
5. Lift/Lower system shall:			
a. Track system for vertical lift of containers or approved equal design.	Yes <input checked="" type="checkbox"/> No		
b. Hydraulic lift system/Cart Assembly is to be driven by a chain connected to a hydraulic cylinder behind the arm. The hydraulic cart consists of two hydraulic cylinders to drive the gripper cart assembly up and down. Lifting/Loading mechanism must not require adjustment.	Yes <input checked="" type="checkbox"/> No		
c. Lifting capacity, 750 lbs (constant through lifts) at full extension.		Lifting Capacity: <u>750</u> lbs	\$ <u>N/C</u>
d. Barrel lift system shall have a brake system capable of stopping a full load (750 lbs) in any part of the lift/dump cycle and holding the weight without any settling.	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
6. Loader arm shall pick up, dump, and return to ground 32, 60, standard City 95 –gallon and 110-gallon plastic containers. Operation shall be preformed without the operator leaving the cab.	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
7. Loader Arm Construction:			
a. The loader arm to vertical mast shall be fully welded on all sides with chamfered weld joints to assure full and deep penetration at all joints.	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
b. The connection between the slide-out roller tube and mast shall have all heavy-duty bearing attachment points heavily braced/reinforced to prevent cracking/failure due to flexure.	Yes <input checked="" type="checkbox"/> No		
c. Loader Arm to be constructed of a one piece "C" channel with the following dimensions: 112"x8"x20". No welds required.		Extension Distance: <u>84</u> inches	
8. Loader arm shall be actuated by 8 hydraulic cylinders:			
a. Cart Dump Cylinders (2ea) - Dimensions:	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
b. Cart lift/lower Cylinders (2ea) – Dimensions:	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
c. Cart Leveling Cylinders (2ea) –Dimensions:	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
d. Carriage extend/retract Cylinder (1ea) – Dimensions:	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
e. Barrel Grabber Cylinder (1ea) –Dimensions:	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
f. The loader arm shall incorporate an interlock to prevent dumping outside of the hopper or releasing the container.	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
g. The arm when fully retracted shall have a pneumatic lock that holds the arm docked preventing inadvertent drift out of the arm with PTO "ON" or "Off"	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
9. Loader arm shall have a spill shield to direct container spillage into the hopper and not on to the ground during dumping.	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
10. Loader arm in-and-out travel shall be roller mounted.	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>
a. Rollers shall travel on hardened steel wear strips and be mounted on eccentric mounts for wear adjustment. Wear	Yes <input checked="" type="checkbox"/> No		\$ <u>N/C</u>

Formal Proposal No. 7294
Small and Narrow Barrel Loader Refuse Trucks
Configuration #1

	<p>adjustment shall be easy and quick to accomplish.</p> <p>b. The loader arm support rollers shall be 1-piece full width to fully support the loader arm on its outer perpendicular walls and prevent tube crushing and adjustment problems.</p> <p>c. Bearing adjustment shall be locked with castle nuts and cotter keys.</p> <p>d. Rollers shall be permanently lubricated.</p> <p>11. Lift arm manifold for hand/manual lubrication system shall be provided. The system shall be easy to access from the ground.</p>	<p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/></p>	<p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p>
K.	<p>Gripper Mechanism:</p> <p>1. The container gripper shall have an adjustable hydraulic circuit limiting the radial force applied to the container.</p> <p>2. The grippers in down ready fully retracted ready position shall not increase the overall truck width past the 102" wide limit</p> <p>3. Gripper shall be a heavy-duty high-friction rubber contact point that will not damage containers.</p> <p>4. The grippers design shall be radiused (rounder) to match the City's barrel radius have zero finger overlap for increased loading clearance to reduce damage to City trash, recycle barrels and property</p> <p>5. Self-leveling to keep containers level through complete travel of the outer boom.</p> <p>6. The standard grippers shall be provided and capable of handling the City's round 32, 60 and standard City 95-gallon and 110-gallon containers.</p> <p>7. Grippers shall grip the container at approximately 24" above the bottom of the barrel</p> <p>8. The grippers shall rotate on tapered roller bearings.</p> <p>9. Grippers shall not release the container during the dumping process and re-grip container at the beginning of the dump process.</p> <p>Gripper Mechanism hydraulic hoses that protrude outside of Gripper Mechanism must be substantially shielded from damage or preferably, modifications made to the junction block which removes the hydraulic lines from area of concern.</p>	<p>Yes <input checked="" type="checkbox"/> No</p> <p>Truck Width Grippers @ Ready: <u>102</u> inches</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Barrel Grip Height: <u>10-21</u> inches</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p>	<p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p>
L.	<p>Service Hoist System:</p> <p>1. The service hoist lift system shall provide excellent access to truck components located under the trash body</p> <p>2. The service hoist system shall lift the front of the body up above the truck frame rail approximately 36" minimum for access</p> <p>3. The system shall use hydraulic oil from the main hydraulic oil tank.</p>	<p>Yes <input checked="" type="checkbox"/> No</p> <p>Lift Height @ front: <u>36</u> inches</p> <p>Yes <input checked="" type="checkbox"/> No</p>	<p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p>

	<p>4. A trash body anti-lowering safety pins or legs shall be provided:</p> <p>a. The pin/legs shall lock the trash body preventing lowering of the body.</p> <p>b. The pin/legs shall be sufficient to support 3X's the fully loaded weight of the body incase truck maintenance is required and the trash load cannot be ejected</p> <p>c. Pin storage in a sleeve, that the pin cannot fall/vibrate etc. out of shall be provided.</p> <p>d. The pin shall be attached to the hoist/trash body/chassis with chain/cable to prevent loss.</p> <p>e. Safety legs shall rest in a saddle to prevent bouncing around.</p>	<p>Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No</p> <p>Safety Factor: <u>3X's</u></p>	
M.	<p>Hydraulic System: Operate at Standard Low Idle.</p> <p>1. Hydraulic pump (tandem gear pump – p75/p50) transmission mounted "Hot Shift" electrically operated PTO. The pump shall have an automatic pump oil bypass system in normal bypass mode when the hydraulic system is not energized.</p> <p>2. Hydraulic system shall be Parker Hannifin Corporation designed and certified and use as many as possible Parker components to assure compatibility of the system and 3 year Parker warranty for using a complete Parker system.</p> <p>3. Hydraulic system shall operate all hydraulic functions at engine low idle speed (750 rpm) and shall not require shifting transmission out of "Drive" gear or applying "Parking" brake. System hydraulic pressure and flow shall not increase above low idle speed, which could encourage an operator to increase engine rpm to try to increase hydraulic performance.</p> <p>4. Hydraulic pump performance, sufficient pressure and volume at low idle rpm to produce one cycle of the compactor blade at 75% load in less than 26-seconds.</p> <p>5. Operating pressure, 2,500 psig maximum.</p> <p>6. Hydraulic valves shall have LED lights on valve coils to aid in troubleshooting the system.</p> <p>7. The hydraulic pump suction line shall be steel tubing with hydraulic hose sections at both the pump and tank end for vibration isolation. The suction line shall be routed for maximum ground clearance and damage protection. Hose swivel ends shall be used on all connections.</p> <p>8. Hydraulic cylinders shall:</p> <p>a. Properly sized to efficiently and continuously perform their function without any cylinder degradation.</p> <p>b. Cylinders shall have industrial hard chrome piston rods.</p>	<p>Pump Make: <u>Permco</u> Model: <u>P75/P50</u> Mounting Location: <u>Transmission</u></p> <p>Make: <u>Chelsea</u> Model: <u>890</u></p> <p>Pump Operating Speed: <u>750</u> rpm Pump Output: <u>20-29</u> gpm @ <u>750</u> rpm</p> <p>Yes <input checked="" type="checkbox"/> No Time: <u>26</u> seconds</p> <p>Operating Pressure: <u>2,000</u> psi Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No Suction Line Size: <u>1</u> in dia. Material: <u>Zinc Dichromate Tubing</u></p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No Size: <u>2.5"</u> x <u>4.5"</u> x <u>4"</u> Yes <input checked="" type="checkbox"/> No</p>	<p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p>

<p>c. Main ram cylinder at the rod end shall have a 4" wide mounting. d. Cylinders shall be fast and easy to remove and replace.</p> <p>9. Hydraulic reservoir: a. Capacity "Best for Application"-gallons minimum b. Oil level and temperature gauge, c. Suction and pressure shut-off valves d. Magnetic drain plug. e. Mounted on left side of body. f. Bung for Future Hydraulic Oil Pre-heater System 1) Possible future installation bung for an Arctic Fox Hydra Liner H-4000 hydraulic fluid warmer. 2) Tank bung shall be schedule 80 2" NPT female thread coupling. 3) Bung shall be welded to 0.250" thick 8" dia steel tank reinforcing ring. 4) The bottom edge of the tread section of the bung and hydraulic oil pre-heater shall be 1 1/2" off the bottom of the tank. 5) The baffles shall be suitable to accept a 24" long heater element and provide a 1" clearance all the way around the element.</p> <p>10. Hydraulic oil shall be ISO Grade 32 (Conoco Phillips) multi-viscosity with a -40°F pour point.</p> <p>11. Hydraulic Filtration, a. Pressure line Parker model: WPF 4,000 psig rated with 7-micron absolute tandem type (2 required, 1 per pump) b. Return line replaceable Parker 7-micron (KLS/KLT) absolute with bypass mode indicator light, easy to access for replacement. c. Suction strainer 100-micron</p> <p>12. Hydraulic system shall maintain oil temperature at no more than 90°F above ambient temperature.</p> <p>13. Hydraulic system test ports shall be provided for each circuit. Test port connections shall be compatible with the Parker Hannifin PD type connector.</p> <p>14. All hydraulic hoses and tubing shall be neatly routed, shielded and secured/supported to prevent chaffing under truck.</p> <p>15. All hydraulic hoses shall be Parker series ST 451TC extra-high-abrasion resistant hoses to reduce hose failure from hose cover damage. Hydraulic hoses shall have swivel ends on each end.</p>	<p>Size: <u>4"</u> Yes <input checked="" type="checkbox"/> No</p> <p>Hydraulic Reservoir Size: <u>60</u> gallons Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Make: <u>Parker</u> Model: <u>WPF4</u> Pressure Line Filter Rating: <u>7,000 psi</u></p> <p>Make: <u>Parker</u> Model: <u>KLS/KLT</u> Return Line Filter Rating: <u>7,000 psi</u> Suction Strainer Size: <u>100-micron</u> Yes <input checked="" type="checkbox"/> No</p> <p>Make: <u>Parker</u> Model: <u>56021616S</u></p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Make: <u>Parker</u> Type: <u>451 "TC"</u></p>	<p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p>
--	--	---

	<p>16. A hydraulic oil recirculation filter system connection system shall be provided with the following:</p> <ol style="list-style-type: none"> The suction and return tubes shall be 1" ID and be installed on the tank top side on each tank end (cross flow) approximately 4" inside the end caps and extending to within 1/4" off the tank bottom at the lowest point. The hydraulic connections shall be 1" Parker FF male (flat face) fittings and orientated so they face to the inside (each other). The suction and return lines shall be 1" ID with a 60° cut on the bottom to assure adequate hydraulic oil flow. The suction and return lines shall be interchangeable in use so it does not matter which hydraulic tank fitting the filter system suction and return lines are connected to. 	<p>Tubing Size: <u>1" ID</u> inches Distance of Tank Bottom: <u>1/4</u> inches</p> <p>Make: <u>Parker.</u> Type: <u>Flat Face</u></p> <p>Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No</p>	
N.	<p>Electrical:</p> <ol style="list-style-type: none"> All remote electrical inter face connections shall be terminated on stud-type terminal strips or with plug type connectors in a waterproof junction box. Connectors/wires shall be permanently and individually labeled. Electrical schematics shall be affixed inside the cover of the junction box. Dielectric grease shall be applied to all terminals and connectors to prevent corrosion if connector is not waterproof. 	<p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Type: <u>Stud Type</u></p> <p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/></p>	<p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u> \$ <u>N/C</u> \$ <u>N/C</u></p>
O.	<p>Control System:</p> <ol style="list-style-type: none"> Cab mounted controls shall all be in ergonomic and natural easy to reach locations. The City has operators of varying statures and adjustable controls will minimize on-the-job related physical problems and improve efficiency. Control locations shall be mutually determined after Contract award. Two (2) separate loader arm control systems shall be provided with following: <ol style="list-style-type: none"> Joystick controls Fingertip controls Both systems shall work together or separately without physically switching an operation program or switch Linear joy stick with short handle and short throw movement arm control to include: <ol style="list-style-type: none"> Deadman button/trigger (stop arm movement when released) Dump-up/down. Grip-squeeze/release Arm-extend/retract Finger control switches to include: 	<p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Photos or drawings shall be provided with the bid for review. Failure to submit information may make the bid non-compliant</p> <p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Make: <u>H&M</u> Model: <u>AE-731J</u></p> <p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/></p>	<p>\$ <u>N/C</u></p> <p>\$ <u>N/C</u></p>

8.	Cab Mounted Controls: a. Cab mounted controls shall all be in ergonomic and natural, easy to reach locations. b. Controls shall be designed to comfortably and efficiently accommodate an operator making 1,200 dumping operations per day, 6 days per week. c. Controls shall have a life cycle of 5,000,000 cycles minimum. d. Controls shall utilize light touch and short throw devices. e. Controls shall be multi-positional to accommodate a variety of operators. The City has operators of varying statures and adjustable controls will minimize on-the-job related physical problems. Control placement shall accommodate operators from 5'-2" to 6'-4" tall and from slender to large physics. f. The controls shall be easy and quick for the operator to securely position without the use of tools for comfort and efficiency. g. Studies suggest that long periods of repetitive motion coupled with an improper work environment and incorrect operator position may be linked to certain types of physical discomfort or injury. These include Carpal Tunnel Syndrome (CTS), Cumulative Stress Disorder (CSD), Tendonitis and Tenosynovitis. h. To help avoid the conditions listed in Section 4.10.O.8.g the City is providing information sites where ergonomic information is available to help in the proper layout of operator controls. 1) Ergonomist Certifying Organizations include: a) Oxford Research Institute: 301-865-4506 b) Board of Certified Professional Ergonomists: 360-671- 7601	Yes X No Yes X No Yes X No Yes X No Yes X No Yes X No	
9.	Main control panel shall be solid state design with LED function indicators. Rocker switches shall be back lighted type for easy identification at night.	Yes X No	\$ <u> N/C </u>
10.	Controls shall be permanently labeled and lighted for easy night viewing.	Yes X No	\$ <u> N/C </u>
11.	Vendor shall provide: a. The City preliminary drawings of the control layout and how the controls are positioned inside the truck cab within 45 days of the contract award. b. Within 120 days of the Contract award the vendor shall provide a preliminary mock up set of controls for review by the City. c. Vendor shall deliver the first article for review, testing and approval before shipping remaining units from the factory.	Yes X No Yes X No Yes X No	\$ <u> N/C </u> \$ <u> N/C </u> \$ <u> N/C </u>

4.6 Compactor Barrel Loader Body or (Approved Equal) Continued			
	Description of Equipment	Offered Equipment	Cost
P.	Grease and Lubrication of Body and Components:		
	1. The trash body and all components requiring regular lubrication (1 time per 2 week period) shall be easy to access from the ground or have a central easy to access grease manifold for lubricating all the required lubrication points to include:	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	a. Tailgate hinge points	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	b. Compaction/push-out system	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	c. Cylinder pins	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	d. Rotational bushings, bearings, shafts etc.	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	e. Other areas that require lubrication	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	2. The grease system shall use steel braided hoses with heavy-duty swivel ends or approved equal lines between the manifold and grease fitting. The system shall assure that all fittings receive the proper amount of lubrication for maximum longevity.	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
	3. The damage susceptible grease zerk fittings shall be protected from damage with a guard.	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>
Q.	Vehicle Rear Lights: (No Approved Equals)		
	1. All lights shall be Truck-Lite "Lifetime Warranty" 12vDC, LED type, flush mount, sealed lexan body, grommet insulated with Fit' N Forget multi-pin plugs where possible.	Make: <u>Truck Lite</u> Model: <u>LED</u>	\$ <u>N/C</u>
	2. Integral Stop/Turn/Tail/ lights mounted in the rear corner post of the dump body model Super 44 P/N 44302R or model 60 P/N 60250R.	Make: <u>Truck Lite</u> Model: <u>Super 44</u>	\$ <u>N/C</u>
	3. Third Brake Light use the same used light used for Stop/Turn/Tail light and disable the Turn and Tail light sections.	Make: <u>Truck Lite</u> Model: <u>Super 44</u>	\$ <u>N/C</u>
	4. Back up lights Truck-Lite LED, flush mount, sealed lexan body, grommet insulated, multi-pin units model 44 P/N 44206C.	Make: <u>Truck Lite</u> Model: <u>44</u>	\$ <u>N/C</u>
	5. Marker lights Truck-Lite LED 3 per side model 10 P/N 10250R or 10250Y or model 30 P/N 30250R or 30250Y.	Make: <u>Truck Lite</u> Model: <u>10 and 30</u>	\$ <u>N/C</u>
	6. Rear ID bar Truck-Lite LED model 35 P/N 35741R or 35740R.	Make: <u>Truck Lite</u> Model: <u>Model 35</u>	\$ <u>N/C</u>
	7. License plate light, Truck-Lite model 15 P/N 15040	Make: <u>Truck Lite</u> Model: <u>Model 15</u>	\$ <u>N/C</u>
	8. Work lights (Truck Lite #81380)Two (2) Hopper and gripper arm mount LED work lights with lighted on dash mounted control switch.	Make: <u>Truck Lite</u> Model: <u>81380</u>	\$ <u>N/C</u>
	9. Wiring shall be sealed Fit' N Forget modular plug-in type where possible. Dielectric grease shall be applied to all plug connections and terminals to prevent corrosion.	Make: <u>Truck Lite</u> Model: <u>Fit-N-Forget</u>	\$ <u>N/C</u>
	Yes <input checked="" type="checkbox"/> No	\$ <u>N/C</u>	

4.6 Compactor Barrel Loader Body or (Approved Equal) Continued			
	Description of Equipment	Offered Equipment	Cost
W.	Special Tailgate Paint: 1. Polyurethane paint equal to DuPont Imron 5000, Color: a. Top ½ of tailgate "Bright White", b. Lower ½ of tailgate "Safety Yellow" with: 1) Alternating "Safety Yellow" paint 8" wide and 2" wide "White" tape. 2) Tape 2" wide 3M Scotchlite "White" DOT reflective conspicuity tape applied from center out in a "Chevron Pattern" with a top horizontal tape strip separating the tailgate's White and Safety Yellow paint. 2. Preparation to include: 3. Removing all mill scale and slag. 4. Variprime 615S self-etching primer or approved equal. 5. Treating bare metal with manufacturer's conditioners and conversion coatings or approved equal. 6. Paint to be applied with all body members painted.	Color: Bright white to match cab Color: <u>Safety Yellow</u> <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No <input checked="" type="radio"/> Yes No	\$ <u>N/C</u> \$ <u>N/C</u>

4.6 (A-W) Refuse Body Equipment SUB TOTAL COST \$ 104,039.00

4.7 Sundries Equipment

When a brand/model is referenced in the specifications unless it is stated as "No Approved Equal" it is only a statement of expected quality, information on alternative products shall be provided with the bid so a full technical comparison can be made of the product submitted as an "approved equal".

	Description of Equipment	Offered Equipment	Cost
A.	Driver Height Warning Sign 1. Installed on truck dash providing the travel height of the vehicle. 2. Sign shall be in 1" "white" block letters.	Provide Specs: <u>Large Decal can include height in 1" letters.</u>	\$ <u>N/C</u>
B.	Conspicuity Tape: 4. DOT-C2 Standard No. 108 reflective conspicuity tape. 5. Tape shall be on both lower sides and rear of the body. 6. Tape shall be applied in symmetrical pattern from middle of panel outward.	Provide specs: <u>Conspicuity Tape is Standard on side of truck fenders and on rear ICC Bumper will add symmetrical pattern</u>	\$ <u>N/C</u>
C.	Mud flaps: 5. Mud flaps shall be heavy-duty anti-sail type 6. Installed front and rear on rear wheels.	Provide specs: <u>H.D. Anti- sail mudflaps mounted behind front and rear wheels.</u>	\$ <u>N/C</u> \$ <u>N/C</u>
D.	Toolbox: 1. The toolbox shall be easily accessible for storage of the flairs, triangles, tire chains and other small tools. 2. Mounted underneath and attached to the right side of the body. The exact location shall be mutually agreed upon at installation. 3. Size 24" long x 18" high x 18" deep T-Handle heavy-duty steel with powder coat "black" finish. 4. The door shall be side-mounted bottom hinged. The box shall have a flush mount latch/lock assemble.	Make: <u>Fleming</u> Model: <u>Steel</u> Location: <u>LH Frame Mounted</u> Size: <u>24"L X 18"H x 18"D "T" Handle</u> Yes X No Yes X No	\$ <u>N/C</u>
E.	Tool Holders: 1. Clean out tool to be mounted on front of body	Yes X No	\$ <u>N/C</u>
F.	Spill Kit: 1. A Brady (Sorbent Products Co.) 5-gallon lab pack oil only spill kit PN SKO-20 shall be provided. 2. The 20-gallon "Safety Yellow" polyethylene spill container shall be UN approved for both water and chemical resistance with a screw type top cover. 3. The oil spill kit shall contain the following minimum: a. 3" x 4' Cellulose Socks, 5 required b. Silvershield gloves, Chemical resistant, 1 pair c. Gloves (large) d. Nitrile gloves, 1 pair required,	Make: <u>Brady</u> Model: <u>PN SKO-5</u> 5 Gallon Yes X No Yes X No Yes X No Yes X No	\$ <u>N/C</u>

	e. Disposal bags, 2 required – Twist Ties, 2 required f. Goggles, 1 pair required g. Emergency response handbook, 1 book required	<input checked="" type="radio"/> Yes	No	
	4. The spill kit shall be installed on the truck frame's right/curb side in a mutually agreed upon location at installation.	<input checked="" type="radio"/> Yes	No	
	5. The spill kit mount shall secure the spill kit to the mounting frame so that the kit cannot dislodge during operation and shall have a provision for securing the kit with a standard padlock.	<input checked="" type="radio"/> Yes	No	
	6. The mount system shall not have any sharp corners/areas that could rub thru the spill container during operation.	<input checked="" type="radio"/> Yes	No	
G.	Tire Chain Holders: 1. Special brackets for storing drive wheel tire chains during winter season shall be provided 2. The chain holders shall be close to the drive wheels and easy to lift tire chains onto/off the brackets 3. Exact location shall be mutually agreed upon at installation			\$ <u>N/C</u>
H.	1. Wheel Chock holders, at rear of truck drivers side	<input checked="" type="radio"/> Yes	No	\$ <u>N/C</u>

Sundries Equipment Sum (A-H) SUB TOTAL COST \$ N/C

4.8 Complete Vehicle Sub Total Cost:

COMPLETE VEHICLE SUB TOTAL COST VEHICLE+ REFUSE BODY + SUNDRIES	\$ <u>197,172.00</u>
--	----------------------

The price indicated above shall be reflected on the last page of this document as well as entered in the required field on the bid website.

4.9 Optional Equipment

Do not include Optional Equipment in the total price of the vehicle; however an equipment price must be provided. The City will determine if the equipment is to be purchased.

	Description of Equipment	Offered Equipment	Cost
A.	<p>CNG Fuel System: Engine Option: CNG IS NOT AVAILABLE ON THIS MODEL TRUCK.</p> <ol style="list-style-type: none"> 1. Cummins VGT turbocharged natural gas engine, rated at 320 hp @ 2,000 rpm, torque 1,000 lb/ft @ 1,300 rpm, 2,200 rpm governed 2. The CNG engine shall meet all required EPA on-highway emissions standards 3. Fuel Tank: <ol style="list-style-type: none"> a Fuel tank shall meet or exceed <ol style="list-style-type: none"> 1) NFPA 52 standards 2) US-DOT/FMVSS304 3) ISO 11439 b Tank Manufacturer c Tank Information <ol style="list-style-type: none"> 1) Tank Construction Type: composite 2) Service Life Years: 20 years 3) Recertification Period: 8 years 4) Type of Recertification Inspection Required 5) Tank Service Pressure Full: 3,600 psig @ 70°F (21°C) 6) Each CNG fuel tank shall have a ¼-turn ball stainless steel shutoff valve mounted at the tank inlet. 4. Tank Installation Location: <ol style="list-style-type: none"> 1) The CNG tank mounting location shall be mutually agreed upon by the vendor and the City prior to the ordering of the cab and chassis. The vendor shall provide drawing of proposed CNG tank location(s). The locations shall not increase the truck wheelbase or the overall height of the truck and body 12' – 6" or body length over a regular non-CNG configuration: <ol style="list-style-type: none"> a) Tank Size: provide diameter x length b) Tank Weight each: Empty c) Quantity of Tanks for 75 gallon DGE d) Weight All Tanks: Empty e) Weight All Tanks: Full CNG f) Tank Enclosure Width, Length, Height g) Tank Enclosure Material: Steel/Gauge 	<p>Make: _____ Model: _____ HP: _____ @ _____ rpm Torque: _____ @ _____ rpm Yes No</p> <p>Yes No Yes No Yes No</p> <p>Make: _____ Model: _____</p> <p>Material: _____ Service Life: _____ yrs Recertification: _____ yrs Inspection Type: _____ Service Pressure: _____ psig Yes No</p> <p>CNG Tank (s) Location: _____ _____ _____ _____ _____ _____</p> <p>Size: _____ dia x _____ long DEG Net _____ gal Tank Weight: _____ lbs # of Tanks: _____ DEG Net _____ gal Weight all tanks and brackets etc: _____ lbs Weight All Tanks Full CNG: _____ lbs Enclosure Size: _____ x _____ x _____ Material: _____ Gauge: _____</p>	<p>\$ NA</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p>

<p>d Tank Mounting:</p> <p>1) End/dome/ boss, 2-piece saddle mounts on each tank end. The tanks shall be installed inside a steel tank mounting frame. The frame shall be 3" x 1 1/2" x 3/16" tubing. The frame shall be powder coat finished for durability.</p> <p>2) CNG tank manufacturer 2-point band type CNG bracket with rubber cushion between tank and bracket to prevent slippage and eliminate chaffing, accommodate tank growth by changes in internal pressure.</p> <p>e The primary tank relief valve (PRD) shall be vented up and away from the vehicle and any ignition sources. The vent shall be protected from rain or vehicle wash water from entering the vent line. The vent line shall be 1/2" diameter minimum.</p> <p>5. CNG Pressure Reducing Regulator System:</p> <p>a The pressure reducing regulator system shall be mounted inside a protective steel enclosure no more than 6 ft from the CNG fuel tank.</p> <p>b From the CNG fuel tank to the regulator the tubing shall be 1/2" od x 0.049" wall 300 series stainless steel minimum.</p> <p>c The pressure reducing regulator system shall have 2 pressure gauges installed in the system.</p> <p>1) High Pressure gauge 0-to-5,000 psi installed on tank side to show tank system pressure.</p> <p>2) Low pressure gauge 0-to-250 psi to show engine downstream fuel delivery pressure to the engine.</p> <p>3) Gauges shall be stainless steel glycerin filled.</p> <p>d The engine coolant flow to the pressure reducing regulator shall be minimum of 1 gallon/minute of 180°F coolant per 50 hp of engine output. For coolant flow the heat exchanger for the engine shall be rated at 450 hp to cover engine rating increases after the truck is delivered.</p> <p>e Engine coolant flow and CNG fuel supply shall enter the regulator on the same side of the regulator.</p> <p>f Coolant ports shall be oriented vertical (up) in horizontal regulators to prevent air from becoming trapped in the regulator.</p> <p>g The pressure reducing regulator shall not under any circumstance be installed in series with the truck cab heater system.</p>	<p>Yes No</p> <p>Frame Size: _____ x _____ x _____</p> <p>Yes No</p> <p>PRD Pressure Release: _____ psig</p> <p>Yes No</p> <p>Tubing Size: _____</p> <p>Yes No</p> <p>Tubing Size: _____ x _____ Type: _____</p> <p>Pressure Range: _____ to _____ psi</p> <p>Pressure Range: _____ to _____ psi</p> <p>Yes No</p> <p>Yes No</p> <p>Yes No</p> <p>Yes No</p> <p>Yes No</p>	<p>\$ NA</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p>
---	--	--

<p>6. Automatic Fuel Shut Off:</p> <p>a The automatic fuel shut off valve shall be plumbed directly to the exit/warm side of the engine coolant heated pressure reducing regulator.</p> <p>b The automatic fuel shut off valve shall have its weight supported by a mounting bracket.</p> <p>c The automatic fuel valve shall have a Cv of 2.0 minimum to assure adequate fuel flow.</p> <p>d The automatic fuel shut off shall be a NC (normally closed) valve when the ignition is in "Off" position.</p> <p>7. Fuel Lines:</p> <p>a All high pressure shall be ½" od x 0.049" wall stainless steel 316L tubing appropriate for the application.</p> <p>b Stainless steel lines shall have thermal expansion/contraction loops for smaller diameter lines and S-bend expansion joints for larger diameter lines.</p> <p>c All CNG lines shall be supported with stainless steel rubber bushed aircraft P-type clamps. The maximum distance between clamps shall no more than 24".</p> <p>d Fitting for the CNG fuel system shall be:</p> <ol style="list-style-type: none"> 1) Stainless steel tube fittings shall be Swagelok or Parker A-lok with thread sealant. 2) Special NPTF pipe fittings shall be stainless steel with thread sealant. <p>e All NPT fitting shall be installed on male pipe threads using proper thread sealants.</p> <ol style="list-style-type: none"> 1) Thread sealant and anti-seize shall be a nickel impregnated or nickel coated Teflon tape. 2) Teflon tape shall start at 2nd thread. 3) On ½" and under use 2 wraps of tape 4) On 5/8" to 1" use 3 wraps of tape. 5) Assure last section of tape is pulled down tight against the threads. 6) Do not use sealant on compression threads <p>f Post heat exchanger hoses and lines may be Parker 929 heavy-wall PTFE hose exceeding SAE100R14A or stainless steel tubing.</p> <p>8. Fuel Fill System:</p> <p>a The fuel receptacle and fuel fill system shall be rated for both "fast fill" and "slow fill" with a minimum ½" od x 0.049" wall 300 series stainless steel.</p>	<p>Yes No</p> <p>Yes No</p> <p>Valve Cv: _____</p> <p>Yes No</p> <p>Make: _____ Type: _____</p> <p>Yes No</p> <p>Yes No</p> <p>Make: _____ Type: _____</p> <p>Yes No</p> <p>Sealant Type: _____</p> <p>Make: _____ Type: _____</p> <p>Yes No</p> <p>Tubing Size: _____</p>	<p>\$ NA</p> <p>\$</p> <p>\$</p> <p>\$</p> <p>\$</p> <p>\$</p> <p>\$</p> <p>\$</p> <p>\$</p> <p>\$</p>
--	--	--

<p>b The fuel fill nozzle:</p> <ol style="list-style-type: none"> 1) Shall be a male NGV1 OPW with rubber protective cover boot 2) Fill location on the driver's side of the vehicle 3) The fuel filler line shall be plumbed to the CNG tank bank. <p>c The tank fill enclosure shall have:</p> <ol style="list-style-type: none"> 1) A high pressure line/tank pressure gauge 0-to-5,000 psi 2) A low pressure fuel to engine pressure gauge 0-to-250 psi 3) An OPW male NGV1 fuel fill receptacle with easy access and excellent clearance for both "fast fill" and "slow fill" receptacles. 4) An emergency ¼-turn shut off valve for shutting down the system in case of a fueling emergency. <p>d The fuel fill access shall be easy to access and easy for the operator to see for fueling and to prevent drive-off with fuel hose attached.</p> <p>e The fill receptacle shall have an easy to remove/reinstall fuel fill cover to protect the fill port from contamination during truck operation.</p> <p>9. CNG Filtration:</p> <ol style="list-style-type: none"> a High pressure, on the fuel tank(s) fill line to clean the CNG before it enters the fuel tank storage system. b Low Pressure, on the downstream "low pressure" post regulator engine delivery side. The "low pressure" filter shall be a Fleetguard spin-on NG5900 with liquid drain or approved equal. <p>10. Fuel Gauge:</p> <ol style="list-style-type: none"> a An electric fuel gauge shall be provided with easy to see vehicle dash gauge to show fuel tank volume. b The fuel sender shall be a sealed unit mounted to the high-pressure tank system c A sealed 3-pin Weatherpak connector with a 1-amp fast blow automotive fuse shall connect the sender to the gauge. d Pins are: <ol style="list-style-type: none"> 1) Red = power 2) Green = signal 3) Black = ground 	<p>Make: _____ Model: _____</p> <p>Fill Location: _____ Yes No</p> <p>Pressure Range: _____ to _____ psi Pressure Range: _____ to _____ psi Yes No</p> <p>Yes No</p> <p>Yes No</p> <p>Yes No</p> <p>Make: _____ Model: _____</p> <p>Make: _____ Model: _____</p> <p>Fuel Gauge Type: _____ Make: _____ Model: _____</p> <p>Yes No</p> <p>Yes No</p> <p>Yes No</p> <p>Yes No</p>	<p>\$ NA</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p>
---	---	--

4.9 Optional Equipment Continued			
	Description of Equipment	Offered Equipment	Cost
B.	Sign Boards, 1. None	Provide Specs	\$ _____
C.	Spare Tire and Wheel: 1. Tire and wheel assembly: 1 per vehicle. 2. Tire: Michelin XZY-3, Steer Tire, 11R22.5 3. Wheel: Size 22.5" x 8.25", disc, 10-hole, hub piloted type, single nut, meeting ISO Standard 4107. "White" powder epoxy coated finish.	<p style="text-align: right;">Multi Energy Z</p> Make: <u>Michelin</u> Model: <u>11 R225 16ply</u> Make: <u>Alcoa</u> Model: <u>225X8.25 LVI</u> <b style="color: red;">Include Spare Tire at \$790.00	\$ <u>790</u>
D.	Remote High-Quality Color Safety 2 Camera System: 1. Cameras (3 required) color Zone Defense system with camera view selection on the TV monitor face (No Approved Equal: a. Rear of vehicle mounted camera wired into vehicle reverse circuit to automatically turn on when vehicle is shifted into reverse: b. Left side camera to serve as an auxiliary left rear view mirror function to augment the left rear view mirrors. The camera shall be normally on viewing the left side of the vehicle. It shall automatically switch to rear of vehicle view when the transmission reverse gear function is activated. An over-ride to keep the left side camera on shall be provided for special situation use. Camera shall be as small as possible and protected from tree branch damage. c. Hopper Camera to be wired to come on as the barrel is being emptied so that the operator can observe what is being collected. 2. Camera (Rear and Hooper) color Zone Defense model CAM.313SH.4P with automatic shutter (2) required: a. Camera shall be in water proof cast aluminum housing. Housing shall be able to be pressure washed when washing vehicle. b. Camera shall have built in safety audio system that will pick up and broad cast normal conversation to monitor. c. Camera shall be automatically heated for cold weather operation. d. Resolution 380 TV lines horizontal. e. Signal to noise ratio 44dB minimum. 3. Camera (Left side) mini color Zone Defense model CAM.313MS 4. Monitor LCD, 7" flat color screen Zone Defense model M7000Q with:	Make: <u>Zone Defense</u> Model: <u>ZD.323.14SH</u> Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No Make: <u>Zone Defense</u> Model: <u>CAM.313SH</u> Quantity: <u>One</u> Yes <input checked="" type="checkbox"/> No Yes <input checked="" type="checkbox"/> No Resolution: <u>420TV</u> lines Make: <u>Zone Defense</u> Model: <u>CAM 313SH</u> Yes <input checked="" type="checkbox"/> No	\$ _____ \$ _____ \$ _____ \$ _____ \$ _____

	<p>a. Monitor shall be in a very easy to see location on the dash next to the "A" pillar that requires as little as possible head movement and also with a little as possible front windshield obstruction. The monitor location shall be mutually agreed upon.</p> <p>b. Camera view selection switches on the TV monitor and trigger wires via power cable.</p> <p>c. Automatic day/night dimmer sensor</p> <p>d. Resolution 291,000 pixels or better.</p> <p>e. Picture control to include brightness, contrast and image.</p> <p>f. Speaker system to broadcast sound from camera.</p> <p>g. Picture shall be crisp and clear at all times.</p> <p>h. Anti-glare sun shield and hood model A7000SS.</p> <p>i. Swivel mounting bracket.</p> <p>j. Automatic dimmer sensor to adjust for day and night viewing.</p> <p>k. Monitor capable of accommodating 2 cameras.</p> <p>5. All wiring shall be totally sealed with sealed locking connections to prevent corrosion.</p> <p>6. All wiring shall be routed to prevent damage to the wiring.</p> <p>7. Warranty 2 years with replacement of failed components with new components shipped UPS "Next Day" upon notification of problem.</p> <p>8. Additional 5 year warranty</p>	<p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Pixels: <u>NA</u></p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Make: <u>Zone Defense</u> Model: <u>NA</u></p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Warranty: <u>One years</u> Include 5 year warranty -\$125.00</p> <p>Yes <input checked="" type="checkbox"/> No</p> <p>Yes <input checked="" type="checkbox"/> No</p>	<p>\$ _____</p> <p>\$ _____</p> <p>\$ _____</p> <p>\$ 125.00</p>
<p>E.</p>	<p>Inspection Trip:</p> <p>1. The City and County of Denver reserves the right to inspect at the body fabricating plant the first (1st) article prior to paint and delivery.</p> <p>2. Where the fabricating plant is located further than 200 road-miles from the City and County of Denver, the bidder shall include in the bid price all travel expenses to the fabrication plant for the inspection.</p> <p>3. The City may select to send from 2 representatives to inspect the 1st article. The provided costs shall be based on one (1) person per day and the City will determine how many representatives the inspection will require and how many days the inspection will require.</p> <p>4. Inspection Trip Costs to include:</p> <p>a. Air fare per person:</p> <p>b. Surface transportation costs:</p> <p>c. Lodging per person per day:</p>	<p>Provide information:</p> <p>Distance to fabrication plant: <u>1000.00</u> miles</p> <p>Plant Location: <u>Ontario, CA</u></p> <p>Include Inspection trip - 3 people See QUOTE WITH REVISED INPECTION TRIP PRICING (page 4)</p> <p>Air Fare: \$ -850.00, Airline: <u>United</u></p> <p>Surface Transportation: \$ 250.00, Mode: <u>Rental</u></p> <p>Lodging / day: \$ -250.00</p>	<p>\$ --850.00</p> <p>\$ --250.00</p> <p>\$ -250.00</p>

d. Meals per person per day:	Hotel: _____ Meals / day: \$ 100.00	\$ 100.00
5. Total cost per person for 1st article inspection trip:		\$ _____

5.0 Manuals/Equipment

Item	Description of Equipment	Offered Equipment	Cost
Training Video	One DVD or CD demonstrating and explaining the safe and proper use of the vehicle/equipment. 1. Cab and chassis. 2. Equipment and Body.	Yes _____ Yes <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/> No	\$ _____ \$ _____
Operators Manual Paper	One book per vehicle/equipment with "safe equipment operation" section for each component. 1. Cab and Chassis. 2. Equipment and Body.		\$ _____ \$ n/c
Service/Repair/Maintenance Manual Paper	Two complete sets per Contract (not per vehicle); binder required, A. Manuals shall be provided for: A. Cab and chassis B. Equipment and body B. Manuals shall include complete and detailed information for maintenance of the equipment, including general information, specifications, troubleshooting guide, lubrication and required adjustments. C. The hydraulic and electrical sections of the manuals shall be provided in a separate electrical/hydraulic binder. Both the hydraulic and electrical circuits shall have separate color coded schematics for each equipment function to show the flow of both electrical current and hydraulic oil.	<input checked="" type="checkbox"/> Yes No <input checked="" type="checkbox"/> Yes No <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> No	\$ _____ \$ n/c

5.0 Manuals/Equipment Continued			
Item	Description of Equipment	Offered Equipment	Cost
Service/ Repair/ Maintenance Manual on CD rom or DVD	One complete set; per Contract (not per vehicle) 1. Manuals shall be provided for: A. Cab and chassis B. Equipment and body 2. Manuals shall include complete and detailed information for maintenance of the equipment, including general information, specifications, troubleshooting guide, lubrication and required adjustments. 3. The hydraulic and electrical sections of the manuals shall be provided in a separate electrical/hydraulic binder. Both the hydraulic and electrical circuits shall have separate color coded schematics for each equipment function to show the flow of both electrical current and hydraulic oil. 4. New CD roms or DVDs shall be provided when information is updated, superseded or changed.	Yes <input type="radio"/> No <input checked="" type="radio"/> Yes <input type="radio"/> No <input checked="" type="radio"/> Yes ^X <input type="radio"/> No	\$ _____ \$ _____
		<input checked="" type="radio"/> Yes ^X <input type="radio"/> No	
		<input checked="" type="radio"/> Yes ^X <input type="radio"/> No	
		<input checked="" type="radio"/> Yes ^X <input type="radio"/> No	\$ _____
Service/ Repair/ Maintenance Manual on Internet Access, or Other Electronic Media	One complete set; per Contract (not per vehicle) 1. Vendor shall provide access to the site for the length of time that the City owns the vehicle/equipment at a one time up front cost to the City. 2. Internet information shall include complete and detailed information for maintenance of the equipment, including general information, specifications, troubleshooting guide, lubrication and required adjustments. 3. The hydraulic and electrical sections of the manuals shall be provided in a separate electrical/hydraulic binder. Both the hydraulic and electrical circuits shall have separate color coded schematics for each equipment function to show the flow of both electrical current and hydraulic oil.	Yes <input checked="" type="radio"/> No ^X	\$ _____
		Yes <input checked="" type="radio"/> No ^X If other Specify: _____ _____ _____	
		Yes <input checked="" type="radio"/> No ^X	

5.0 Manuals/Equipment Continued			
Item	Description of Equipment	Offered Equipment	Cost
Parts Manual Paper	Two complete sets, per Contract (not per vehicle) binders required, 1. Manuals shall be provided for: A. Cab and chassis B. Equipment and body 2. Illustrated parts book shall be furnished containing data so that part numbers can be readily found for each system.	Yes <input checked="" type="checkbox"/> Yes X <input checked="" type="checkbox"/> Yes X No <input type="checkbox"/> No <input type="checkbox"/> No	\$ _____ \$ _____
Parts Manual on CD rom or DVD	One complete set, per Contract (not per vehicle) illustrated parts book shall be furnished containing data so that part numbers can be readily found for each system. 1. Information shall be provided for: A. Cab and chassis B. Equipment and body 2. Parts manuals shall include complete and detailed information for replacement parts for the equipment, including general information, specifications ordering guide lines and superseded parts information. 3. New CD roms or DVDs shall be provided when information is updated, superseded or changed.	<input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes No No No <input checked="" type="checkbox"/> Yes X No	\$ _____ \$ _____
Parts Manual on Internet Access, or Other Electronic Media	One complete subscription; per Contract (not per vehicle) 1. Internet information shall allow the City 24 hour 7 days/week including holidays access from its main maintenance facility and all its satellite maintenance facilities. 2. Internet information shall include complete and detailed information for parts for the: A. Cab and Chassis B. Equipment and Body 3. Internet information shall cover vehicle/equipment, shall include general parts information, parts specifications, ordering guide lines and superseded parts information. 4. Vendor shall provide access to the site for the	Access Information: 7 days/week including holidays <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> No X <input checked="" type="checkbox"/> Yes Yes <input type="checkbox"/> No Yes <input checked="" type="checkbox"/> No X Yes <input checked="" type="checkbox"/> No X	\$ _____ \$ _____

	length of time that the City owns the vehicle/equipment at a one time up front cost to the City. 5. Parts manuals shall include complete and detailed information for replacement parts for the equipment, including general information, specifications ordering guide lines and superseded parts information.	If other Specify: _____ _____ <input checked="" type="radio"/> Yes <input type="radio"/> No	
New Equipment Check-in Form:	The successful vendor shall complete the City's "New Equipment Check-in Form" completely and accurately with all requested information.	_____ _____ _____	\$ <u>N/C</u>

5.1 **Operator and Mechanics Training**

Item	Description of Equipment	Offered Equipment	Cost
On Site Equipment Manufacturers Training	On site the vendor shall insure that the equipment manufacturers training representative, after delivery of the equipment Contacts Fleet Maintenances training manager to coordinate equipment training.	_____ AMREP will Supply Personnel for Training _____ _____	\$ _____
Fleet Maintenance Training Manager	Charlie Pletcher, Telephone: 720.865.4151 Contact time: 8:00 am to 3:00 pm M-F	AMREP Supplied _____ _____	
Training Requirements	Training shall consist of factory training materials, classroom and actual field training on the equipment for the equipment operators and supervisors.	_____ _____ _____	\$ <u>N/C</u>
On Site Mechanics Training	On site mechanics training shall be 1 class, approximately 4 hours, 1 shift total provided at City facilities. The training shall cover maintenance and service procedures, trouble shooting and use of manuals and CNG operations.	_____ _____ _____	\$ <u>N/C</u>

6.0 Repair Parts Delivery

Repair Parts delivery	
A	<p>Prime Vendor is to indicate current Master Purchase Order agreement(s) in place with the City. (Example 0667A0108):</p> <p>If no agreement(s) exists, is your company willing to enter into long-term Master Purchase Order Agreement(s) in order to supply parts and components for the equipment and manufacturers proposed herein? YES OR NO 0667A0308</p>
B	<p>Sub-Vendor is to indicate current Master Purchase Order agreement(s) in place with the City. (Example 0298A0609):</p> <p>If no agreement(s) exists, is your company willing to enter into long-term Master Purchase Order Agreement(s) in order to supply parts and components for the equipment and manufacturers proposed herein? YES OR NO</p>

7.0 Warranty

7.1 Warranty Requirement

WARRANTY (Table 1)		Complies (Y or N/A)
A.	Express warranty is to be the standard factory warranty but no less than 12 months or 36,000 miles. The standard factory warranty plan shall be provided as an attachment to your bid proposal	Yes
B.	The Warranty shall include at no cost to the City of Denver, all parts and labor, and no charge for work performed at the vendor's facility and for field service work.	Yes
C.	Warranty shall start when the City places the vehicle into service and NOT on the delivery date.	Yes
D.	Primary vendor shall provide warranty information for engine, transmission, chassis, electronics, body and other major components for cab and chassis built vehicles. This provision is not applicable to OEM (Original Equipment Manufacturer) factory completed light-duty vehicles.	Yes
E.	Options listed shall be bid and provided as factory installed under the terms of the full factory-backed warranty. This includes, but is not limited to: air conditioning, radios, cruise control, bumpers, towing packages etc. Dealer-installed options will not be permitted unless pre-approved by the City in writing and, where applicable, indicated on bid sheet as a "dealer installed" non-factory item.	Yes
F.	Bidder will be responsible for the warranty repair of all installed options/auxiliary equipment included in the bid that has a standard warranty that is less than the standard warranty for the base vehicle/equipment. All warranties shall be equal to the manufacturer's warranty or not less than twelve (12) months, whichever is greater.	Yes
G.	Bidder shall use a single, local factory authorized dealership that will accomplish or coordinate required warranty work. The dealership must have a minimum of 1-year experience as a factory authorized vendor for like equipment being bid. Warranty parts shall be available and supplied within 24 hours. When warranty parts are not in stock, causing the vehicle to be down more than 3 working days, those required parts shall be air freight shipped at the vendor/manufacturer's expense	Yes
H.	If applicable, bidder shall provide a plan for the City to be reimbursed if the work can be done by the City on site. The current shop rate is \$75.00/hour, not to exceed \$85.00/hour. (Enter a response of N/A if not available)	Yes

7.0 Warranty Continued		
	WARRANTY (Table 1)	Complies (Y or N/A)
I.	The bidder shall respond to request for warranty assistance within twenty-four (24) hours.	Y
J.	Warranty work shall be accomplished within an appropriate length of time (generally less than 3 working days for everything other than major component repair such as an engine rebuild, transmission rebuild major structural integrity modification etc. and shall be coordinated with an authorized City representative. Major component repairs shall be accomplished in no more than two weeks and shall be coordinated with an authorized City representative. [Any work not completed within two weeks after delivery of the vehicle will extend the term of the warranty one day for each day in excess of the two week repair period.]	Yes
K.	During the entire warranty period, if the unit requires transportation to a repair facility, the vendor/sub-vendors shall be responsible for all transportation at "NO COST" to the City and County of Denver. This includes transporting the unit back to the City's domicile location after repairs are complete. If an alternate is bid, charges to the City of Denver shall be listed (e.g. mileage, travel, labor, etc.). Even if an alternate is bid, in NO CIRCUMSTANCES will the City and County of Denver be responsible for transporting a unit greater than 25 miles from the center of Denver. For purposes of these warranty provisions, the center of Denver is defined as the City and County Building located on the corner of Colfax and Bannock Street.	N/A
L.	The item(s) procured by the City pursuant to this Bid Proposal shall, in addition to being subject to the express warranties referenced above, be subject to all implied warranties arising by operation of State and Federal law, including but not limited to the implied warranty of merchantability and, to the extent applicable, the implied warranty of fitness for a particular purpose arising under the Colorado Uniform Commercial Code, Title 4, Colorado Revised Statutes. The bidder shall in no event attempt to limit or disclaim any implied warranties under this Bid Proposal, and any attempt to do so will render the bidder's bid non-responsive under this Bid Proposal. Additionally, any attempt by the bidder to alter the warranties stated herein after the City has accepted a bid, such as in a receipt for goods delivered, shall be void and of no legal effect. The bidder shall explicitly state and acknowledge this condition in its bid response.	Yes
M.	This warranty in Table 1 and Table 2, is IN ADDITION to factory warranties on the vehicle and components	Exception

7.2 Fleet Defects

Table 2

Fleet Defects (Table 2)		
A.	Definition: If during the warranty period, thirty percent (30%) of the total number of units delivered have the same part(s) and/or components failure requiring replacement and/or modifications, caused by defects in Structural Integrity, Design, Material, and/or Workmanship or affecting safety, then this "Fleet Defect Clause" goes into effect.	
B.	Remedy: Following notification of a Fleet Defect, the vendor shall develop and implement a plan that either reengineers, modifies, or replaces the defective parts/ systems, such that the identified problem is cured and the operation of the vehicle/equipment is not altered. When alterations are required to cure the defect, those alterations that change or modify the original bid specifications must be approved by the City and County of Denver prior to execution. The vendor will pay for all necessary labor and materials to repair, modify, and/or "update" all vehicles/units in this group. The vendor shall also propose a work schedule that is mutually agreed upon by the City of Denver that corrects the fleet deficiency within 30 days or a mutual agreed upon schedule.	

7.3 Warranty Options Continued				
Cost of Factory Extended Warranties		Please indicate in the columns below the additional cost of an extended warranty for all applicable components listed in the left hand column. Inc = Included N/A = Not available		
		Two Years	Three Years	Five Years
L.	Other			
M.	Notes:			

7.4 Warranty Service Locations: Warranty repair parts and service shall be available locally at an established factory authorized dealership meeting requirements of Table 1 Section 7.

- A. Cab & Chassis: Rush Truck Center 303-292-3170
 Dealership Name: _____ Telephone #: _____
 Street Address: 5165 Vasquez Blvd City: Denver, Co. 80216
- B. Rear Loader Trash Body: HardLine Equipment 303-500-2176
 Dealership Name: HardLine Equipment Telephone #: 303-500-2176
 Street Address: 7500 Dahlia Street City: Commerce City, CO 80022
- C. Sundries Dealership Name: _____ Telephone #: _____
 Street Address: _____ City: _____

8.0 Heavy Duty Vehicle Delivery Documentation:

Delivery Documentation (GVWR 26,000-Lbs and Above Heavy Duty)	
A.	Vehicles ordered under this specification shall be complete and delivered to CITY AND COUNTY OF DENVER, Fleet Management Division. All prices quoted must be quoted at a firm price F.O.B. Denver, Colorado, 5440 Roslyn St. Building C.
B.	Vendor shall supply at acceptance and delivery of vehicle. 1. Bill of Sale (aka invoice, buyers order) 2. Original MSO (Manufacturers Statement of Origin) 3. Application for Title and/or Registration, Colorado Dept of Revenue form DR2395 (02-22-11) 4. Odometer Disclosure Statement, Colorado Dept of Revenue form DR2407 (09-07-05) 5. Letter of Certification on Vendor Letterhead (Required for Incomplete Vehicles) with added bodies etc, describes the final configuration of the vehicle) 6. Air Brake inspection form required for any vehicle with air brakes or truck units capable of towing trailers greater than 10,000-Lbs 7. Standard Sales Tax Receipt. 8. DOT inspection form.

	<p>9. Temporary License Plate.</p> <p>10. New Equipment Check-in Form/ Vendor Supplied Information on the Vehicle. Form provided by Fleet contact Dolores @ 720.865.3903</p> <p>11. Copy of City Purchase Order.</p> <p>12. All Keys ordered for the Vehicle and Sundries, i.e. toolboxes etc.</p> <p>13. All Manuals repair, parts, owners and/or CD's/DVD's etc</p> <p>14. Vehicle Warranty information and receipt for optional warranty.</p> <p>15. Receipts and Warranty information for vendor Installed/supplied components (lift gates, snowplows, lighting equipment etc)</p>
C.	<p>For an "Incomplete Vehicle" (cab & chassis) add the following:</p> <p>1. Verification of Vehicle Identification Number (VIN), Colorado Dept. of Revenue form DR2087.</p> <p>2. Statement of Fact for incomplete vehicles with added bodies etc, describes the final configuration of the vehicle.</p> <p>3. Original weight slip.</p>
D.	<p>Delivery: Monday through Friday between 8:00am and 1:00pm. Location: CITY AND COUNTY OF DENVER Fleet Management 5440 Roslyn St. Building C Denver, CO 80216 Contact person to coordinate delivery: Dolores Gallegos at (720) 865-3900 ext. 03 or direct line (720) 865-3903.</p>

9.0 Vehicle Delivery

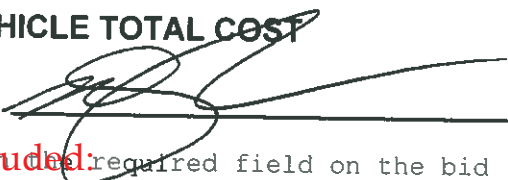
9.1 Delivery of Cab and Chassis to Body Vendor

PROVIDE NUMBER OF DAYS REQUIRED FOR DELIVERY OF CAB AND CHASSIS AFTER PURCHASE ORDER IS ISSUED TO BODY VENDOR	<u>75</u> DAYS
--	----------------

9.2 Delivery of Completed Truck with Body Installed to City and County of Denver

PROVIDE NUMBER OF DAYS REQUIRED FOR DELIVERY OF COMPLETE VEHICLE AFTER CAB AND CHASSIS IS DELIVERED	<u>90</u> DAYS
--	----------------

10.0 Complete Vehicle Cost

<p>Include:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Cab & Chassis Total Cost <input type="checkbox"/> Rear Loader Body Total Cost <input type="checkbox"/> Sundries Items Total Cost <p>Do Not Include:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Optional Equipment <input type="checkbox"/> Warranty Cost (s) <input type="checkbox"/> Manual Cost (s) 	<p>ONE COMPLETE VEHICLE TOTAL COST</p> <p>Authorized Signature: </p> <p>Indicate options included in required field on the bid website.</p>	<p><u>\$197,172.00</u></p>
--	---	----------------------------

Options Included:

4.9.C - Spare Tire \$790.00

4.9.d - Camera 5 yr warranty \$125.00

4.9.e - Inspection Trip Total Cost \$2,376.00 (split over 5 trucks - \$475.20 per truck) - CANCELLED FOR 2017 ORDER

January 2017 Order:

Total Complete Vehicle Cost with Options: \$198,087.00

Rush Truck Center
 HARDLINE Equipment

CITY PO EXHIBIT
City and County of Denver
Fleet Management
Vendor Supplied Information Data

City Unit(s) # _____

(City Use Only) _____

ENTER CITY PURCHASE ORDER NUMBER: _____-0 0 0 0 0 0 _____
Examples: PWOPS-0000012345, POLIC-0000001234, FIRES-000001234

The following underlined forms and information are REQUIRED for new vehicle deliveries:

- Copy of entire Purchase Order (all pages)
- Original MSO (Manufacturers Statement of Origin) – is required for all vehicles except off-road and construction equipment. May receive one for some off road equipment if manufacturer issues one.
Name of purchaser: **City and County of Denver**
Address: **201 W. Colfax Ave. Dept. 304**
Denver, CO 80202
- Secured Dealer Bill of Sale (DR2407) – IN STATE ONLY – Required for on the road vehicles Such as cars, pickup[s], vans and any vehicle under 16,000 GVWR. Not needed if odometer Section is filled out and signed on MSO. Not required on vehicles over 16,000GVWR LBS.
- Application for Title and Registration (DR2395) – Required for all on-road vehicles and trailers.
- Verification of Vehicle Identification Number (DR2698) – Required for all Vehicles coming from an out of state dealer, incomplete vehicle. I.E. Cab and Chassis.
- Statement of Fact (DR2444) - Required on all vehicles with modifications to the cab and chassis. Such as a body crane, auxiliary engine, etc. The statement of fact must include the modifications made and include VIN numbers of chassis and equipment.
- Special Mobile Machinery Form (DR2689) - Required on all off road and Construction equipment. I.E. Front end loaders, tractors, skid steer loaders, Mowers, air compressors, motor graders, etc.
- Weight slip required - (on all incomplete vehicles that are made into a complete vehicle) – and all off-road equipment and construction type equipment. (Front end loaders, sweepers, graders, air compressors, rollers, etc.).
- Temporary License Plate – Required for all on-road vehicles. Not required for off road Equipment.
- Original Dealer Invoice – Required for all vehicles on and off the Road.
- Receipt or Contract for Optional Warranty – Only if spec or called out on P.O.
- Shop and Parts manuals (as required) (CD or electronic form preferred) – Only if spec or show as a line item of P.O.

Dealer Signature: _____ Date: _____