
# ARTICLE 6. GENERAL URBAN (G-) NEIGHBORHOOD CONTEXT

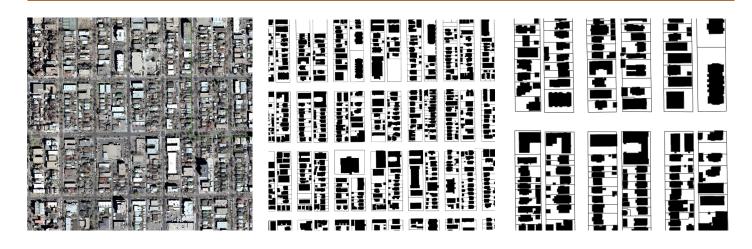

This page intentionally left blank.

## **Contents**

# ARTICLE 6. GENERAL URBAN (G-) NEIGHBORHOOD CONTEXT

<b>DIVISION 6.1</b>	NEIGHBORHOOD CONTEXT DESCRIPTION	6.1-1
Section 6.1.1	General Character	6.1-1
Section 6.1.2	Street, Block and Access Patterns	
Section 6.1.3	Building Placement and Location	6.1-1
Section 6.1.4	Building Height	
Section 6.1.5	Mobility	
DIVISION 6.2	DISTRICTS (G-RH-, G-MU-, G-RO-, G-MX-, G-RX-, G-MS-)	6. <b>2</b> -1
Section 6.2.1	Districts Established	6.2-1
Section 6.2.2	Residential Districts (G-RH-3, G-MU-3 to -20, G-RO-3, G-RO-5)	6.2-1
Section 6.2.3	Mixed Use Districts (G-MX-3)	
Section 6.2.4	Residential Mixed Use Districts (G-RX-3, -5)	6.2-3
Section 6.2.5	Main Street Districts (G-MS-3, -5)	
DIVISION 6.3	DESIGN STANDARDS	6.3-1
Section 6.3.1	General Intent	6.3-1
Section 6.3.2	Building Form Intent	6.3-1
Section 6.3.3	Primary Building Form Standards	6.3-5
Section 6.3.4	Detached Accessory Building Form Standards	6.3-28
Section 6.3.5	Supplemental Design Standards	6.3-40
Section 6.3.6	Design Standard Alternatives	6.3-46
Section 6.3.7	Design Standard Exceptions	
Section 6.3.8	Reference to Other Design Standards	6.3-70
<b>DIVISION 6.4</b>	USES AND REQUIRED MINIMUM PARKING	6.4-1
Section 6.4.1	Applicability	6.4-1
Section 6.4.2	Organization - Summary Use and Parking Table	
Section 6.4.3	Explanation of Table Abbreviations	6.4-1
Section 6.4.4	District Specific Standards	6.4-3

This page intentionally left blank.

#### DIVISION 6.1 NEIGHBORHOOD CONTEXT DESCRIPTION













#### **SECTION 6.1.1 GENERAL CHARACTER**

The General Urban Neighborhood Context is characterized by multi-unit residential uses in a variety of building forms. Single-unit and two-unit residential uses are also found in a mix of residential building forms. Low-scale commercial areas are embedded within residential areas. Commercial uses occur in a variety of building forms that may contain a mixture of uses within the same structure. Residential uses are primarily located along local and residential arterial streets. Commercial uses are primarily located along mixed-use arterial and main streets but may be located at or between intersections of local streets.

#### SECTION 6.1.2 STREET, BLOCK AND ACCESS PATTERNS

The General Urban Neighborhood Context consists of a regular pattern of block shapes surrounded by an orthogonal street grid. Orthogonal streets provide a regular pattern of pedestrian and vehicular connections through this context and there is a consistent presence of alleys. Block sizes and shapes are consistent and include detached sidewalks, tree lawns, street and surface parking, and landscaping in the front setback.

#### SECTION 6.1.3 BUILDING PLACEMENT AND LOCATION

Residential buildings typically have consistent, shallow to moderate front setbacks, shallow side setbacks and consistent orientation. Commercial buildings typically have consistent orientation and shallow front setbacks with parking at the rear and/or side of the building.

#### SECTION 6.1.4 BUILDING HEIGHT

The General Urban Neighborhood Context is characterized by moderate to high residential buildings and low to moderate commercial and mixed use structures in appropriate locations to promote a dense urban character. Lower scale structures are typically found in areas transitioning to a less dense urban neighborhood.

#### **SECTION 6.1.5 MOBILITY**

There is a balance of pedestrian, bicycle and vehicle reliance with greater access to the multi-modal transportation system.

Article 6. General Urban Neighborhood Context Division 6.1 Neighborhood Context Description

This page intentionally left blank.

# DIVISION 6.2 DISTRICTS (G-RH-, G-MU-, G-RO-, G-MX-, G-RX-, G-MS-)

#### SECTION 6.2.1 DISTRICTS ESTABLISHED

To carry out the provisions of this Article, the following zone districts have been established in the General Urban Neighborhood Context and are applied to property as set forth on the Official Map.

#### **General Urban Neighborhood Context**

G-RH-3	Row House 3
G-MU-3	Multi Unit 3
G-MU-5	Multi Unit 5
G-MU-8	Multi Unit 8
G-MU-12	Multi Unit 12
G-MU-20	Multi Unit 20
G-RO-3	Residential Office 3
G-RO-5	Residential Office 5
G-MX-3	Mixed Use 3
G-RX-3	Residential Mixed Use 3
G-RX-5	Residential Mixed Use 5
G-MS-3	Main Street 3
G-MS-5	Main Street 5

# SECTION 6.2.2 RESIDENTIAL DISTRICTS (G-RH-3, G-MU-3 TO -20, G-RO-3, G-RO-5)

#### 6.2.2.1 General Purpose

- A. The intent of the Residential districts is to promote and protect higher density residential neighborhoods within the character of the General Urban Neighborhood Context. These regulations allow for multi-unit districts with a variety of residential building forms.
- B. The building form standards, design standards, and uses work together to promote safe, active, pedestrian-scaled residential areas. The standards accommodate the pattern of urban house, duplex, row house, garden court, and apartment. Buildings orient to the street and access is from the alley. Lot coverage is typically high accommodating a consistent, shallow front yard.
- C. These standards recognize the variation within the General Urban Neighborhood Context and provide eight Residential Zone Districts. The lowest-scale districts with a maximum height of three stories provide a transition to Urban and Urban Edge Neighborhood Contexts. The highest-scale districts with a maximum height of 12 and 20 stories promote a dense, urban residential character where appropriate. The Residential Office (RO) districts provide opportunities for residential and offices uses in low to moderate scale residential building forms.
- D. The regulations provide a consistent framework to property owners, developers, and neighborhood residents to reinforce desired development patterns, encourage affordable housing, and accommodate reinvestment in residential districts.

#### 6.2.2.2 Specific Intent

#### A. Row House 3 (G-RH-3)

G-RH-3 is a multi unit district allowing urban house, duplex, and row house building forms. Row houses are not taller than three stories.

#### B. Multi-Unit 3 (G-MU-3)

G-MU-3 is a multi unit district allowing urban house, duplex, garden court, town house, and apartment building forms. The tallest building form has a maximum height of three stories.

#### C. Multi-Unit 5 (G-MU-5)

G-MU-5 is a multi unit district allowing urban house, duplex, row house, garden court, town house, and apartment building forms. The tallest building form has a maximum height of five stories.

#### D. Multi-Unit 8 (G-MU-8)

G-MU-8 is a multi unit district allowing urban house, duplex, row house, town house, and apartment building forms. The tallest building form has a maximum height of eight stories.

#### E. Multi-Unit 12 (G-MU-12)

G-MU-12 is a multi unit district allowing urban house, duplex, row house, town house, and apartment building forms. The tallest building form has a maximum height of twelve stories.

#### F. Multi-Unit 20 (G-MU-20)

G-MU-20 is a multi unit district allowing urban house, duplex, row house, town house, and apartment building forms. The tallest building form has a maximum height of twenty stories.

#### G. Residential Office 3 (G-RO-3)

G-RO-3 is a multi unit and office district allowing urban house, duplex, row house, town house, and apartment building forms. The tallest building form has a maximum height of three stories.

#### H. Residential Office - 5 (G-RO-5)

G-RO-5 is a multi unit and office district allowing urban house, duplex, row house, town house, and apartment building forms. The tallest building form has a maximum height of five stories.

### **SECTION 6.2.3** MIXED USE DISTRICTS (G-MX-3)

#### 6.2.3.1 General Purpose

- A. The Mixed Use zone districts are intended to promote safe, active, and pedestrian-scaled, diverse areas through the use of town house, row house, apartment, and shopfront building forms that clearly define and activate the public street edge.
- B. The Mixed Use zone districts are intended to enhance the convenience, ease and enjoyment of transit, walking, shopping and public gathering within and around the city's neighborhoods.
- C. The Mixed Use zone district standards are also intended to ensure new development contributes positively to established residential neighborhoods and character, encourages affordable housing, and improves the transition between commercial development and adjacent residential neighborhoods.
- D. Compared to the Main Street districts, the Mixed Use districts are focused on creating mixed, diverse neighborhoods. Where Main Street districts are applied to key corridors and retail streets within a neighborhood, the Mixed Use districts are intended for broader application at the neighborhood scale.
- E. In the General Urban Neighborhood Context, the Mixed Use zone districts promote a pedestrian-active street front. Buildings are pulled up to the street with parking tucked behind; however, the front setback range is slightly deeper than the front setback range for the Main Street districts. The required percentage of building facade that must be located in the front setback is less) than the percentage for the Main Street districts. The maximum building coverage is the same as the maximum building coverage for the Main Street districts.



#### 6.2.3.2 Specific Intent

#### A. Mixed Use – 3 (G-MX-3)

G-MX-3 applies to areas or intersections served primarily by local or collector streets where a building scale of 1 to 3 stories is desired.

#### SECTION 6.2.4 RESIDENTIAL MIXED USE DISTRICTS (G-RX-3, -5)

#### 6.2.4.1 General Purpose

- A. The Residential Mixed Use zone districts are intended to promote safe, active, and pedestrianscaled, diverse areas through the use of building forms that clearly define and activate the public realm.
- B. The Residential Mixed Use zone districts are intended to enhance the convenience, ease and enjoyment of transit, walking, shopping and public gathering within and around the city's residential neighborhoods.
- C. The Residential Mixed Use zone district standards are also intended to ensure new development contributes positively to established residential neighborhoods and character, encourages affordable housing, and improves the transition between commercial development and adjacent residential neighborhoods.
- D. Compared to the Mixed Use districts, the Residential Mixed Use districts are primarily intended to accommodate residential uses. Commercial uses are secondary to the primary residential use of the district, and provide neighborhood-scaled shops and offices for residents to conveniently access goods and services within walking distance. Buildings in a Residential Mixed Use district can have commercial uses, but upper stories are reserved exclusively for housing or lodging accommodation uses. A building can be solely residential or solely commercial; however, buildings containing only commercial uses are limited in total gross floor area to 10,000 square feet consistent with the district purpose.

#### 6.2.4.2 Specific Intent

#### A. Residential Mixed Use 3 (G-RX-3)

G-RX-3 applies to residentially-dominated areas served primarily by local or collector streets where a building scale of 1 to 3 stories is desired.

#### B. Residential Mixed Use 5 (G-RX-5)

G-RX-5 applies to residentially-dominated areas served primarily by local or collector streets where a building scale of 2 to 5 stories is desired.

### SECTION 6.2.5 MAIN STREET DISTRICTS (G-MS-3, -5)

#### 6.2.5.1 General Purpose

- A. The Main Street zone districts are intended to promote safe, active, and pedestrian-scaled commercial streets through the use of building forms that clearly define and activate the public street edge.
- B. The Main Street zone districts are intended to enhance the convenience, ease and enjoyment of transit, walking, shopping and public gathering along the city's commercial streets.
- C. The Main Street district standards are also intended to ensure new development contributes positively to established residential neighborhoods and character, encourages affordable housing, and improves the transition between commercial development and adjacent residential neighborhoods.

- D. Main Street zone districts are typically applied linearly along entire block faces of commercial, industrial, main, mixed-use and residential arterial streets (as designated in Blueprint Denver) or, less frequently, on single zone lots at the intersection of local/collector streets within a residential neighborhood.
- E. In all cases, the Main Street zone districts should be applied where a higher degree of walkability and pedestrian activity is desired than required in a Corridor, Mixed Use, or Residential Mixed Use zone district.
- F. In the General Urban Neighborhood Context, the Main Street zone districts may also be embedded within a larger commercial shopping center or mixed-use area to promote a pedestrianactive street front within a larger mixed use or commercial development.
- G. The Main Street zone districts are intended to promote an urban, mixed-use, built-to environment regardless of neighborhood context. Main Street buildings have a shallow front setback range. The build-to requirements are high and the maximum building coverage is significant.

#### 6.2.5.2 Specific Intent

#### A. Main Street 3 (G-MS-3)

G-MS-3 applies primarily to local or collector street corridors, or may be embedded within a commercial shopping center or mixed-use area, where a building scale of 1 to 3 stories is desired.

#### B. Main Street 5 (G-MS-5)

G-MS-5 applies primarily to collector or arterial street corridors, or may be embedded within a larger commercial shopping center or mixed-use area, where a building scale of 2 to 5 stories is desired.

#### **DIVISION 6.3 DESIGN STANDARDS**

The following Intent Statements are intended to provide further information regarding intent and performance expectations for the district, site and building design standards.

#### **SECTION 6.3.1 GENERAL INTENT**

The Intent of this Division 6.3 Design Standards are to:

- 6.3.1.1 Implement the Denver Comprehensive Plan.
- 6.3.1.2 Implement the zone district's Intent and Purpose
- 6.3.1.3 To continue Denver's physical character, including access to parks and parkways, tree lined streets, detached sidewalks, interconnected street networks, and convenient access to parks, open space, and transit.
- 6.3.1.4 Improve compatibility with and respect for the existing character and context of Denver and its neighborhoods.
- 6.3.1.5 Arrange building density, uses, heights, and scaling devices to reinforce the public transit centers and corridors, and to transition to adjoining areas.
- 6.3.1.6 Give prominence to pedestrian realm as a defining element of neighborhood character.
- 6.3.1.7 Spatially define public streets and their associated open space as positive, usable features around which to organize and orient buildings in a manner that promotes pedestrian activity, a sense of security and community.
- 6.3.1.8 Provide human scale in buildings through use of detail, contrast, form, window and door placement, color and materials.
- 6.3.1.9 Provide easily identifiable pedestrian connections between private development, public rights of way and multiple modes of transit.
- 6.3.1.10 Configure the site so that a clear, safe, and attractive pedestrian system, with the transit facility as a component, is the primary public element to which buildings are oriented.
- 6.3.1.11 Arrange residential, employment, retail, service, and open space uses to be convenient to and compatible with each other and with transit.
- 6.3.1.12 Maximize pedestrian amenities near transit facilities and along the primary pedestrian connections to transit facilities.

#### SECTION 6.3.2 BUILDING FORM INTENT

The intent of the Building Form Design Standards are to:

#### 6.3.2.1 Height

- A. Encourage buildings whose forms are responsive to the surrounding context, including opportunities to reinforce existing and evolving nodes of mixed-use, pedestrian and transit activities.
- B. Arrange building heights, and scaling devices to provide transitions to adjoining areas.
- C. Allow flexibility in height for buildings that provide additional affordable housing.

#### 6.3.2.2 Siting

#### A. Required Build-To

- 1. Provide a consistent street edge to enhance character of the context.
- 2. Define streets to promote pedestrian activity and sense of place.

3. Reinforce the character and quality of public streets with buildings that provide consistent siting, pedestrian orientation and access to the street.

#### B. Setbacks

- 1. Site buildings to be consistent with the intended character and functional requirements of the urban context.
- 2. Site buildings to define the street edge/public realm consistent with the context.
- 3. Utilize buildings to create positive transitions between districts.

#### C. Parking Location

- 1. Minimize the visual impacts of parking areas on streets and adjoining property.
- 2. Minimize conflicts between pedestrian and vehicles.

#### 6.3.2.3 Design Elements

#### A. Configuration

- 1. Promote variation in building form that enhances access to daylight, air and views from within and around new structures.
- 2. Encourage variation in building form that provides opportunities for architectural scale relationships in large building contexts.
- 3. Main Street setback: Reinforce the proportional scale of buildings to street width in order to establish a strong edge to Main Streets and other urban street corridors..
- 4. Arrange building heights, and scaling devices to provide transitions to adjoining areas.

#### B. Transparency

- 1. Maximize transparency of windows at Street Level to activate the street.
- 2. Utilize doors and windows to establish scale, variation, and patterns on building facades that provide visual interest and reflect the uses within the building.
- 3. Limit the use of highly reflective glass to avoid reflected glare onto neighboring streets and properties.

#### C. Entrances

- 1. Give prominence to pedestrian realm as a defining element of neighborhood character.
- 2. Provide convenient access to buildings and active uses from the street.
- 3. Articulate and create a visual hierarchy of building entrances as an aid in way-finding.
- 4. Provide a positive relationship to the street through access, orientation and placement consistent with the context.
- 5. Create visually interesting and human-scaled facades.

#### 6.3.2.4 Specific Building Form Intent

#### A. Residential Zone Districts

#### 1. Urban House

Establish standards for development on small zone lots, typically Single Unit Dwellings, but may be other uses permitted within the zone district.

#### 2. Duplex

Establish standards for development on small zone lots, typically Two Unit Dwellings, but may be other uses permitted within the zone district.

#### 3. Row House

Establish standards for buildings containing Side-by-Side Dwelling Units to require each Dwelling Unit to Orient to the Street and have a street-facing entrance. No Dwelling Units are located behind the Dwelling Units Oriented to the Street. Accommodates Multi-Unit Dwelling development.

#### 4. Garden Court

Establish standards for Multi Unit Dwelling development where dwelling entrances may be oriented around a common, central Garden Court with landscaping, rather than exclusively orienting toward the street, as Row House requires. Off-Street Parking Areas are restricted in the front of the Zone Lot. Accommodates Two Unit and Multi-Unit Dwelling development.

#### 5. Town House

Establish standards for buildings containing Side-by-Side Dwelling Units to require Dwelling Units located near the street to be Oriented to the Street. Compared to the Row House building form, additional Dwelling Units are permitted behind the Dwelling Units Oriented to the Street. Accommodates Two Unit and Multi-Unit Dwelling development.

#### 6. Apartment

Establish standards for Multi-Unit Dwelling development that allows a variety of Dwelling Unit configurations, but does not allow structures containing mostly Side-by-Side Dwelling Units. The building form requires a minimum of one entrance at the street, in addition to transparency and other design elements. Also accommodates, where permitted, appropriately scaled Congregate Living, Residential Care, Civic, and Nonresidential development.

#### B. Commercial Mixed Use Zone Districts

#### 1. Drive Thru Services

To allow more flexible design standards to accommodate unique circumstances of automobile service uses and primary uses with an accessory drive-thru lane. Specifically, allow a reduced build-to percentage and an increased build-to range, allow a canopy and garden wall combination to meet a portion of the build-to requirement, and require a garden wall along street frontages.

#### 2. Drive Thru Restaurant

Restricted to eating and drinking establishment with an accessory drive-thru lane.

- a. MX: Allow a reduced build-to percentage, an increased range, and a drive-thru lane to be located between the building and any street.
- b. MS: For corner lots only, allow a reduced build-to percentage along the Primary Street, when the build-to percentage is increased along the Side Street.

#### 3. General

Establish a set of standards to define and activate the street. The building form requires a minimum of one pedestrian Entrance at the street, in addition to other design elements that promote an active street front. The building form allows for a variety of site configurations, but does not allow structures containing mostly Side-by-Side Dwelling Units. All uses are allowed.

#### 4. Shopfront

Establish a set of standards to define and activate the street. The building form requires a minimum of one pedestrian Entrance at the street, in addition to other design elements that promote an active street front. The building form allows for a variety of site configurations, but does not allow structures containing mostly Side-by-Side Dwelling Units. Compared to the General building form, the Shopfront building form has increased standards for design elements such as transparency, active use and build-to. All uses are allowed.

# SECTION 6.3.3 PRIMARY BUILDING FORM STANDARDS FOR PRIMARY STRUCTURES

#### 6.3.3.1 Applicability

All development, except detached accessory structures, in all the General Urban Neighborhood Context zone districts

#### **6.3.3.2** District Specific Standards Summary

The table below states the building forms allowed in each zone district. The table also summarizes the maximum number of structures allowed per Zone Lot, which is stated in more detail in Section 1.2.3.5 (Number of Uses and Structures Allowed per Zone Lot).

See also Division 1.4, Building Form Standards - General Provisions, for additional standards related to initial assignment of building form standards to new and existing structures and for rules governing combining or changing building forms. <a href="Building Connectors between two detached structures">Building Connectors between two detached structures</a> shall follow the standards provided in Section 1.4.5.


General Urban (G-) Neighl Zone Districts	borhood Context	Buildi	ng For	ms									
Zone Signites		Suburban House	Urban House	Duplex	Tandem House	Row House	Garden Court	Town House	Apartment	Drive Thru Services	Drive Thru Restaurant	General	Shopfront
Max Number of Primary Structures Per Zone Lot		1*	1*	1*	2				No Ma	aximum	1		
RESIDENTIAL ZONE DISTRIC	CTS												
Row House (RH)	G-RH-3					-							
AA.de: Llocie (AALI)	G-MU-3, -5						-						
Multi Unit (MU)	G-MU-8, -12, -20												
Residential Office (RO)	G-RO-3, -5												
COMMERCIAL MIXED USE Z	COMMERCIAL MIXED USE ZONE DISTRICTS												
Residential Mixed Use (RX)	G-RX-3, -5												
Mixed Use (MX)	G-MX-3												
Main Street (MS)	G-MS-3, -5										_		


 $<sup>\</sup>blacksquare$  = Allowed subject to geographic limitations \*See Section 1.2.3.5 for exceptions


#### 6.3.3.3 District Specific Standards

#### A. Urban House

Not to Scale. Illustrative Only.

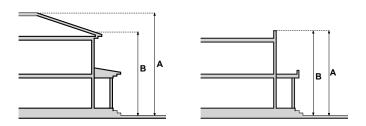

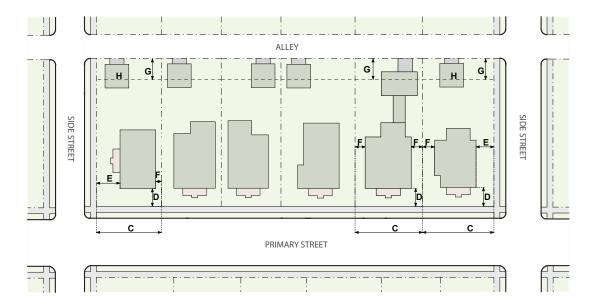

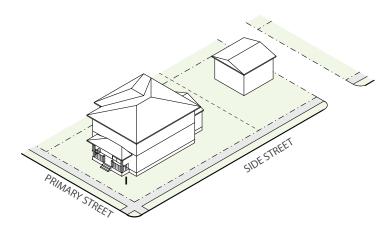

#### **URBAN HOUSE**

		G-MU-3	G-MU-5	G-MU-8,
HEIGHT	G-RH-3	G-RO-3	G-RO-5	-12, -20
Stories (max)	see below	3	3	3
Feet (max)	see below	30′*	30′*	30′*
Stories, front 80% / rear 20% of zone lot depth (max)	3/1	na	na	na
Feet, front 80% / rear 20% of zone lot depth (max)	30'*/19'	na	na	na
Side Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)	25′	na	na	na
Upper Story Setback, for Low-slope Roof, Above 25', Side Interior and Side Street (min)	15′	na	na	na
	Feet, front 80% / rear 20% of zone lot depth (max) Side Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max) Upper Story Setback, for Low-slope Roof, Above 25',	Stories (max)  Feet (max)  See below  Stories, front 80% / rear 20% of zone lot depth (max)  Feet, front 80% / rear 20% of zone lot depth (max)  Side Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)  Upper Story Setback, for Low-slope Roof, Above 25',	HEIGHTG-RH-3G-RO-3Stories (max)see below3Feet (max)see below30'*Stories, front 80% / rear 20% of zone lot depth (max)3/1naFeet, front 80% / rear 20% of zone lot depth (max)30'*/19'naSide Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)25'naUpper Story Setback, for Low-slope Roof, Above 25',15'na	HEIGHTG-RH-3G-RO-3G-RO-5Stories (max)see below33Feet (max)see below30'*30'*Stories, front 80% / rear 20% of zone lot depth (max)3/1nanaFeet, front 80% / rear 20% of zone lot depth (max)30'*/19'nanaSide Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)25'nanaUpper Story Setback, for Low-slope Roof, Above 25',15'nana

 $<sup>^*1^\</sup>prime$  for every 5' increase in lot width over 50' up to a maximum height of 35'

			G-MU-3	G-MU-5	G-MU-8,
	SITING	G-RH-3	G-RO-3	G-RO-5	-12, -20
	ZONE LOT				
	Zone Lot <del>Size</del> <u>Area</u> (min)	3,000 sf	3,000 sf	3,000 sf	3,000 sf
С	Zone Lot Width (min)	25′	25′	25′	25′
			All G-RH, -MU, -RC	)	
	SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH	30' or Less	Greater than 30' and up to 40'	Greater than 40' and less than 75'	75' or Greater
D	Primary Street (min)	G-MU-3 and G-R	G-RH-3: Calculated per Sec O-3: Calculated per Sec. 13.1 G-MU-5, -8, -12, -20 and G-	.5.9, or 20', which	ever is less
Е	Side Street (min)	3′	5′	5′	5′
F	Side Interior (min)	3′	3' min one side/10' min combined	5′	7.5′
G	Rear, where Alley (public or private) abuts a Rear Zone Lot Line (min)	12′ <del>/20</del> ′	12′ <del>/20</del> ′	12′ <del>/20′</del>	12′ <del>/20′</del>
G	Rear, where no a Alley (public or private) / no alley abuts a Rear Zone Lot Line (min)	20′	20′	20′	20′
	Building Coverage per Zone Lot, including all accessory structures (max)	<u>60</u> 50%	<u>45</u> 50%	<u>45</u> 50%	<u>40</u> 50%
	PARKING BY ZONE LOT WIDTH				
	Parking and Drive Lot Coverage in Primary Street Setback/Overall (max)		e measured parallel to the Pr Zone H <u>L</u> ot <del>a</del> Area within the P is greater		
	Vehicle Access	From Alley; or Stre	et access allowed when no A	Alley present (See	Sec. 6.3.7.6)
Н	DETACHED ACCESSORY STRUCTURES		See Sec. 6.3.4		


DESIGN ELEMENTS	All G-RH, -MU, -RO
BUILDING CONFIGURATION	
Attached Garage Allowed	<ul> <li>(1) Shall not be located closer to the minimum Primary Street setback Zone Lot         Line than the Primary Street-facing façade(s) comprising at least 65% of the total             width of the primary structure enclosing the pPrimary uUse.     </li> <li>(2) May follow the Detached Garage building form Side Street, Side Interior and         Rear setbacks     </li> </ul>
Primary Street Facing Attached Garage Door Width in front 50% of zone lot depth(max)	35% of the entire width of the Primary Street-facing façade of the primary structure or 16′, whichever is greater
STREET LEVEL ACTIVATION	
Pedestrian Access, Primary Street	Entry Feature
USES	All G-RH, -MU, -RO

For Primary Structures constructed on or before April 27, 2017, all permitted Primary Uses shall be allowed within this building form; however, for Primary Structures constructed after April 27, 2017, Primary Uses shall be limited to Single Unit Dwelling and permitted Congregate Living, Residential Care, and Nonresidential uses. See Division 6.4 Uses and Parking

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

#### B. Duplex

Not to Scale. Illustrative Only.

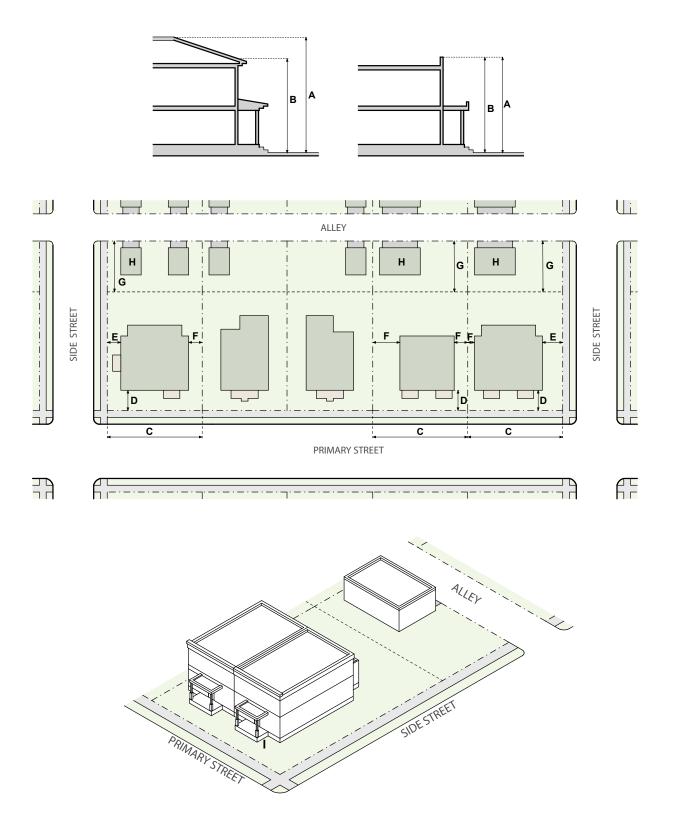

#### **DUPLEX**

	HEIGHT	G-RH-3	G-MU-3 G-RO-3	G-MU-5 G-RO-5	G-MU-8, -12, -20
Α	Stories (max)	see below	3	3	3
Α	Feet (max)	see below	30′*	30′*	30′*
	Stories, front 80% / rear 20% of zone lot depth (max)	3/1	na	na	na
	Feet, front 80% / rear 20% of zone lot depth (max)	30'*/19'	na	na	na
В	Side Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)	25′	na	na	na
	Upper Story Setback, for Low-slope Roof, Above 25': Side Street and Side Interior (min)	15′	na	na	na

<sup>\*1&#</sup>x27; for every 5' increase in Zone Lot width over 50' up to a maximum height of 35'

			G-MU-3	G-MU-5	
	SITING	G-RH-3	G-RO-3	G-RO-5	G-MU-8, -12, -20
	ZONE LOT				
	Zone Lot <del>Size</del> <u>Area</u> (min)	3,000 sf	3,000 sf	3,000 sf	3,000 sf
С	Zone Lot Width (min)	25′	25′	25′	25′

			All G-RH,	-MU, -RO	
	SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH	30' or Less	Greater than 30' and up to 40'	Greater than 40' and less than 75'	75' or Greater
D	Primary Street (min)	G-MU-3 and G	G-RH-3: Calculated i-RO-3: Calculated per 9 G-MU-5, -8, -12, -2	Sec. 13.1.5.9, or 20', w	hichever is less
Е	Side Street (min)	3′	5′	5′	5′
F	Side Interior (min)	3′	3' min one side/10' min combined	5′	7.5′
G	Rear, where Alley (public or private) abuts a Rear Zone Lot Line (min)	12′ <del>/20′</del>	12′ <del>/20′</del>	12′ <del>/20</del> ′	12′ <del>/20′</del>
<u>G</u>	Rear, where no a Alley (public or private)/no alley abuts a Rear Zone Lot Line (min)	20′	20′	20′	20′
	Building Coverage per Zone Lot, including all accessory structures (max)	<u>60</u> 50%	<u>45</u> 50%	<u>45</u> 50%	<u>40</u> 50%
	PARKING BY ZONE LOT WIDTH				
	Parking and Drive Lot Coverage in Primary Street Setback (max)	50%	50%	50%	50%
	Vehicle Access	From A	lley; or Street access al (See Sec.	•	present
Н	DETACHED ACCESSORY STRUCTURES		See See	. 6.3.4	

DESIGN ELEMENTS	All G-RH, -MU, -RO Districts
BUILDING CONFIGURATION	
Attached Garage Allowed	<ul> <li>(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street-facing façade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use.</li> <li>(2) May follow the Detached Garage building form Side Street, Side Interior and Rear setbacks</li> </ul>
Primary Street Facing Attached Garage Door	35% of the entire width of the Primary Street-facing façade of the primary struc-
Width in front 50% of zone lot depth(max)	ture or 16′, whichever is greater
STREET LEVEL ACTIVATION	
Pedestrian Access, Primary Street	Entry Feature
USES	All G-RH, -MU, -RO Districts

For Primary Structures constructed on or before April 27, 2017, all permitted Primary Uses shall be allowed within this building form; however, for Primary Structures constructed after April 27, 2017, Primary Uses shall be limited to Two Unit Dwelling and permitted Congregate Living, Residential Care, and Nonresidential uses. See Division 6.4 Uses and Parking

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

#### C. Row House



#### **ROW HOUSE**

	HEIGHT	G-RH-3
Α	Stories (max)	see below
Α	Feet (max)	see below
	Stories, front 80% / rear 20% of Zone Lot depth (max)	3/1
Α	Feet, front 80% / rear 20% of Zone Lot depth (max)	30′*/19′
В	Side Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)	25′
С	Upper Story Setback, for Low-slope Roof, Above 25': Side Street and Side Interior (min)	15′

<sup>\*1&#</sup>x27; for every 5' increase in Zone Lot width over 50' up to a maximum height of 35'

	SITING	G-RH-3
	ZONE LOT	
	Zone Lot Size Area (min)	6,000 sf
D	Zone Lot Width (min)	50′
	SETBACKS	
	Primary Street (min)	Calculated per Sec. 13.1.5.9
Е	Side Street (min)	5′
F	Side Interior (min)	5′
	Rear, where Alley (public or private) abuts a Rear Zone Lot Line (min)	10′ <del>/20′</del>
	Rear, where no a Alley (public or private)/no alley abuts a Rear Zone Lot Line (min)	20′
	PARKING	
	Surface Parking between building and Primary Street/Side	Not Allowed/Allowed
	Street	Not Allowed/Allowed
	Vehicle Access	From Alley; or Street access allowed when no Alley present
	DETACHED ACCESSORY STRUCTURES	See Sec. 6.3.4

	DESIGN ELEMENTS	G-RH-3
	BUILDING CONFIGURATION	
G	Dwelling Units Oriented to the Street	All Dwelling Units shall be Oriented to the Street
	Dwelling Unit Configuration	Structure shall only contain Side-by-Side Dwell- ing Units
н	Street-facing Garage Door Width per Primary Structure (max)	20′
	Attached Garage Allowed	May follow the Detached Garage building form Side Street, Side Interior and Rear setbacks
1	Pedestrian Access	Each unit shall have a street-facing Entrance
	USES	G-RH-3
		Primary Uses shall be limited to Multi Unit Dwelling (3+). See Division 6.4 Uses and Parking

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

#### D. Garden Court



#### **GARDEN COURT**

	HEIGHT	G-MU-3	G-MU-5
Α	Stories (max)	3	3
Α	Feet (max)	35'	35'

	SITING	G-MU-3	G-MU-5		
	ZONE LOT				
	Zone Lot <del>Size</del> <u>Area</u> (min)	9,000 sf	9,000 sf		
В	Zone Lot Width (min)	75'	75'		
	SETBACKS				
		Calculated per			
С	Primary Street (min)	Sec. 13.1.5.9 or 20',	10'		
		whichever is less			
	Side Street (min)	7.5′	7.5′		
D	Side Interior (min)	7.5′	7.5′		
	Rear, where Alley (public or private) abuts a Rear Zone Lot	10′ <del>/20′</del>	10′ <del>/20′</del>		
	Line (min)	10720	10720		
	Rear, where no a Alley (public or private) / no alley abuts a	20′	20′		
	Rear Zone Lot Line (min)				
Е	Required Separation Between Primary Structures (min)	10′	10′		
	PARKING				
	Surface Parking between building and Primary Street/Side	Not Allowed/N	ot Allowed		
	Street	Not Allowed/N			
F	Off-Street Parking Area	Shall be Setback a minimum 50' from the Primary			
•		Street			
	Vehicle Access	From Alley; or Street access allowed when n			
_		prese			
G	DETACHED ACCESSORY STRUCTURES	See Sec.	6.3.4		

	DESIGN ELEMENTS	G-MU-3	G-MU-5			
	BUILDING CONFIGURATION					
Н	Street-Facing Courtyard Width (min)	30' or 33% of Zone Lot widtl	h, whichever is greater			
1	Street-Facing Courtyard Depth (min)	30'				
	Garden Court Design Standards	See Sec. 6	5.3.5.3			
	Attached Garage Allowed	May follow the Detached Side Street, Side Interio	5			
	STREET LEVEL ACTIVATION					
J	Transparency, Primary Street (min)	30%	, 0			
	Transparency, Side Street (min)	25%	Ó			
		Each dwelling unit shal				
		Entrance. A minimum of two dwelling units shall				
ĸ	Pedestrian Access	have a Dwelling Unit Entrance with Entry Feature				
•••	r edestrian / teeess	facing the Primary Street and all other dwelling				
		units shall have an Entrance that faces either the				
		Primary Street or the int	terior Garden Court.			
	USES	G-MU-3, G	G-MU-5			
		Primary Uses shall be limite				
		and Multi Unit Dwelling (3-	+) See Division 6.4 Uses			
		and Par	king			

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives, and Design Standard Exceptions



Entrance with Entry Feature

All G-MU and G-RO

#### TOWN HOUSE (MULTI UNIT DISTRICTS)

USES

	TOWN HOUSE (MULTI UNIT DISTRICTS)		
		G-RO-3	G-RO-5
^	HEIGHT	G-MU-3	G-MU-5, -8, -12, -20
	Stories (max)	3	5
А	Feet (max)	35'	65′
	SITING	G-RO-3 G-MU-3	G-RO-5 G-MU-5, -8, -12, -20
	ZONE LOT	a mo 3	G 1010 3, 0, 12, 20
	Zone Lot SizeArea (min)	6,000 sf	6,000 sf
В	Zone Lot Width (min)	50′	50′
	REQUIRED BUILD-TO		
c	Primary Street (min % within min/max)	70%	70%
	Exception from required Build-to	10'/15' See Section 6.3.7.2	10′/15′
	SETBACKS	3cc 3cction 0.5.7.2	
_		Calculated per Sec. 13.1.5.9 or 20', whichever	10'
D	Primary Street (min)	is less	
Ε	Side Street (min)	7.5′	7.5′
F	Side Interior, except Dwelling Units Oriented to the Street (min)	12.5'	12.5
G	Side Interior, for Dwelling Units Oriented to the Street (min)	7.5′	7.5′
Н	Side Interior, for Dwelling Units Oriented to the Street, adjacent to Protected District (min)	10′	10′
	Rear, where Alley (public or private) abuts a Rear Zone Lot Line (min)	10' <del>/20'</del>	10′ <del>/20′</del>
	Rear, where no a Alley (public or private) / no alley abuts a Rear Zone Lot Line (min)	20'	20′
	PARKING		
	Surface Parking between building and Primary Street/Side Street	Not Allowed/Allowed	
	Vehicle Access	From Alley; or Street access allowed whe	n no Alley present
		G-RO-3	G-RO-5
	DESIGN ELEMENTS	G-MU-3	G-MU-5, -8, -12, -20
	BUILDING CONFIGURATION		
I	Dwelling Units Oriented to the Street	Required if any portion of the Dwelling Unit Primary Street Zone Lot Line or 20' of the Sid	
	Dwelling Unit Configuration	Structure may contain Side-by-Side I	Owelling Units
	Upper Story Setback Above 40′, Side Interior (min)	na	G-MU-5: 15' G-RO-5, G-MU-8, -12, -20: na
	Upper Story Setback Above 51', Side Interior (min)	na	G-MU-5: na G-RO-5, G-MU-8, -12, -20: 15'
J	Upper Story Setback Above 27', adjacent to Protected District: Side Interior (min)	25′	25′
	Upper Story Setback Above 51', adjacent to Protected District: Side Interior (min)	na	40′
	Upper Story Setback Above 40', adjacent to Protected District: Rear, alley/Rear, no alley (min)	na	30′/40′
	STREET LEVEL ACTIVATION		
K	Transparency, Primary Street (min)	40%	40%
	Transparency, Side Street (min)	25%	25%
L	Pedestrian Access	Each Dwelling Unit Oriented to the Street sh	

Primary Uses shall be limited to Two Unit Dwelling and Multi Unit Dwelling (3+) uses. See Division 6.4 Uses and Parking

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

#### F. Town House (Mixed Use Districts)




# TOWN HOUSE (MIXED USE DISTRICTS)

	HEIGHT	G-MX-3	G-RX-3	G-RX-5	G-MS-3	G-MS-5
Α	Stories (max)	3	3	5	3	5
Α	Feet (min/max)	na/38'	na/38'	na/70'	na/38'	24'/70'
	SITING	G-MX-3	G-RX-3	G-RX-5	G-MS-3	G-MX-5
	REQUIRED BUILD-TO	700/	750/	750/	750/	750/
В	Primary Street (min % within min/max)	70% 10′/15′	75% 10'/15'	75% 10'/15'	75% 10'/15'	75% 10'/15'
			25%	25%	25%	25%
	Side Street (min % within min/max)	na	7.5'/15'	7.5'/15'	7.5'/15'	7.5'/15'
	SETBACKS					
C	Primary Street (min)	10'	10'	10'	10'	10'
D	Side Street (min)	7.5′	7.5′	7.5′	7.5′	7.5′
	Side Interior (min)	5'	5'	5'	5'	5'
F	Side Interior, adjacent to Protected District (min)	10'	10'	10'	10'	10'
	Rear (min)	0'	0'	0'	0'	0'
	Rear, adjacent to Protected District, where Aalley (public or private) abuts a Rear Zone Lot Line/no alley (min)	0' <del>/10'</del>	0' <del>/10'</del>	0' <del>/10'</del>	0' <del>/10'</del>	0' <del>/10'</del>
	Rear, adjacent to Protected District, where no Aalley (public or private) abuts a Rear Zone Lot Line	<del>10'</del>	<del>10'</del>	<del>10'</del>	<del>10'</del>	<del>10'</del>
	PARKING					
	Surface Parking between building and	MX: Not				
	Primary Street/Side Street	Allowed/ Allowed	RX,	MS: Not Allo	wed/Not Allov	ved
	Vehicle Access	From Alley; or Street access allowed when no Alley present				
	Verificie Access	TIOITAILE	y, or street at	cess allowed	WHEIT HO Alle	y present
	DESIGN ELEMENTS	G-MX-3	G-RX-3	G-RX-5	G-MS-3	G-MS-5
	BUILDING CONFIGURATION					
G	Dwelling Units Oriented to the Street		treet Zone Lo	t Line or 20' o	g Unit is locate of the Side Str	
				(See Sec. 13.		
	Dwelling Unit Configuration	Struc	ture may con	tain Side-by-S	Side Dwelling	Units
Н	Upper Story Setback Above 27', adjacent to Protected District: Rear, alley/Rear, no alley and Side Interior (min)	15'/25'	15'/25'	20'/25'	15'/25'	20'/25'
	Upper Story Setback Above 51', adjacent to Protected	na	na	35'/40'	na	35'/40'
	District: Rear, alley/Rear, no alley and Side Interior (min)					
	STREET LEVEL ACTIVATION					
ī	Transparency, Primary Street (min)	40%	40%	40%	40%	40%
•	Transparency, Side Street (min)	25%	25%	25%	25%	25%
J	Pedestrian Access	Each Dwelling Unit Oriented to the Street shall have Dwelling Unit Entrance with Entry Feature				
	ucec	CMV2	C DV 3	C DV F	CMC2	CMCF
	U S E S Street Level Active Uses (min % of Primary Street frontage	G-MX-3	G-RX-3	G-RX-5	G-MS-3	G-MS-5
	meeting Build-To requirement)	40%	na	na	100%	100%
	Permitted Primary Uses				Unit Dwelling on 6.4 Uses an	
	See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, De					

#### G. Apartment

Not to Scale. Illustrative Only.

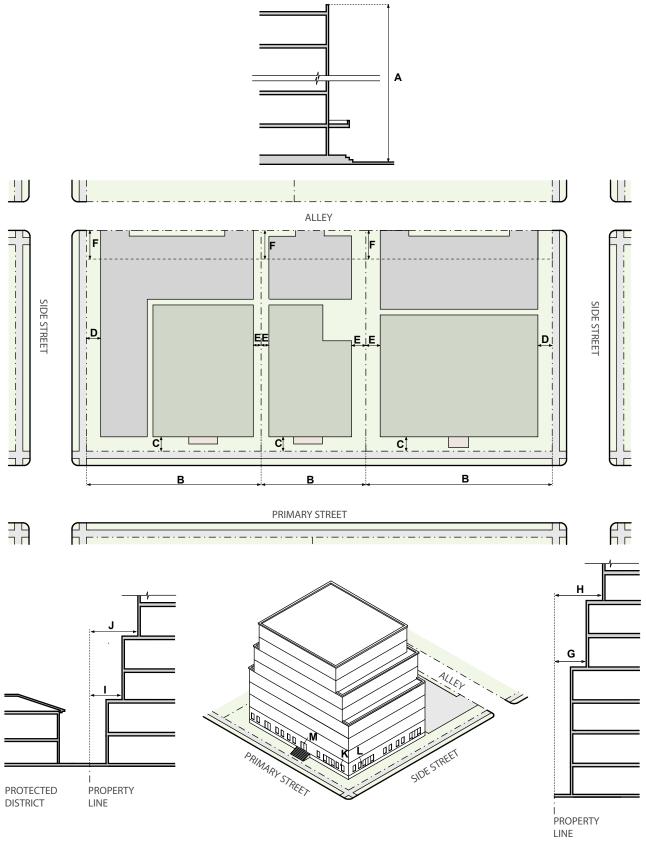

**DENVER ZONING CODE** June 25, 2010 | Republished July 1, 2021

| 6.3-21

## **APARTMENT**

	,,						
	HEIGHT	G-RO-3 G-MU-3	G-MU-5	G-RO-5	G-MU-8	G-MII-12	G-MU-20
Α	Stories (max)	3	5	5	8	12	20
	Feet (max)	40′	65′	65′	100′	140′	230′
	Stories/Feet, with incentives (max)	4/50'	7/90' See S	7/90' Section 10.1	12/140' 2.1	16/185'	30/340'
	Feet, within 175' of Protected District (max)	na	75'	75'	75′	75′	75′
		G-RO-3					
	SITING	G-MU-3	G-MU-5	G-RO-5	G-MU-8	G-MU-12	G-MU-20
	ZONE LOT						
	Zone Lot Size Area (min)	6,000 sf	6,000 sf	6,000 sf	6,000 sf	6,000 sf	6,000 sf
	Zone Lot Width (min)	50′	50′	50′	50′	50′	50′
	REQUIRED BUILD-TO						
В	Primary Street (min % within min/max)	60% 10′/20′	60% 10'/20'	60% 10'/20'	60% 10′/20′	60% 10'/20'	60% 10'/20'
	Exception from required Build-to		See S	Section 6.3.7	7.2		
	SETBACKS		1.01	4.01	4.01	101	101
С	Primary Street (min)	Calculated per Section 13.1.5.9 or 20', which- ever is less	10'	10'	10'	10'	10'
D	Side Street (min)	5′	5′	5′	5′	5′	5′
Е	Side Interior (min)	7.5′	7.5′	7.5′	7.5′	7.5′	7.5′
	Side Interior, adjacent to Protected District (min)	10′	10′	10′	10′	10′	10′
F	Rear, where Alley (public or private) abuts a Rear Zone Lot Line (min)	10′ <del>/20′</del>	10′ <del>/20′</del>	10′ <del>/20′</del>	10′ <del>/20′</del>	10′ <del>/20′</del>	10′ <del>/20′</del>
£	Rear, where no aAlley (public or private)/no alley abuts a Rear Zone Lot Line (min)	20′	20′	20′	20′	20′	20′
	PARKING Surface Parking between Building and						
	Primary Street/Side Street		Not A	llowed/Allov	wed		
	Vehicle Access, all other permitted uses	Shall be deter	mined as pa	rt of Site De	velopment	Plan Review	
		G-RO-3					
	DESIGN ELEMENTS	G-MU-3	G-MU-5	G-RO-5	G-MU-8	G-MU-12	G-MU-20
	BUILDING CONFIGURATION	Ctructur	e may conta	in Cida by C	ida Duyallina	n I Inite	
	Dwelling Unit Configuration	Residential Only Struct	ure: Side-by-		ng Units sh		ed 50% of
	Street-facing Garage Door Width per Primary Structure (max)	20′	20′	20′	20′	20′	20′
	Upper Story Setback Above 40', Side Interior (min)	na	15′	na	na	na	na
G	Upper Story Setback Above 51', Side Interior (min)	na	na	15′	15′	15′	15′
Н	Upper Story Setback Above 75', Rear, alley/Rear, no alley and Side Interior (min)	na	na	na	20′/30′	20′/30′	20′/30′
I	Upper Story Setback Above 27', adjacent to Protected District: Side Interior (min)	25′	25′	25′	25′	25′	25′
J	Upper Story Setback Above 51', adjacent to Protect-	na	40′	40′	40′	40′	40′
	ed District: Side Interior (min)						
	ed District: Side Interior (min)  Upper Story Setback Above 40′, adjacent to Protected District: Rear, alley/Rear, no alley (min)  STREET LEVEL ACTIVATION	na	30′/40′	30′/40′	30'/40'	30′/40′	30′/40′

K	Transparency, Primary Street (min)	40%	40%	40%	40%	40%	40%
L	Transparency, Side Street (min)	25%	25%	25%	25%	25%	25%
M	Pedestrian Access, Primary Street			Entrance			
	USES	All G-MU and G-RO					
		Primary Llos shall be limited to Multi Unit Dwelling (3+) and permitted Congregate					

Primary Uses shall be limited to Multi Unit Dwelling (3+) and permitted Congregate Living, Residential Care, and Nonresidential uses. See Division 6.4

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

#### H. Drive Thru Services





#### **DRIVE THRU SERVICES**

HEIGHT G-MX-3	G-MS-3, -5
	on Zone Lots within 1/4 mile of a Rail Transit Sta- tion Platform
HEIGHT G-MX-3	G-MS-3, -5
Stories (max) 3	3
Feet (max) 45'	45'
Teet (max)	15
SITING G-MX-3	G-MS-3, -5
REQUIRED BUILD-TO	G-1813-3, -3
Primary Street (min % within min/max)* 50% 0'/15'	50% 0′/15′
Side Street (min % within min/max)*  50% 0'/15'	50% 0'/15'
SETBACKS	30% 0/13
Primary Street (min) 0'	0′
Side Street (min) 0'	0′
Side Interior (min) 0'	0′
Side Interior, adjacent to Protected District (min) 10'	10'
Rear (min) 0'	0′
Rear adjacent to Protected District where Aalley (pub-	
lic or private) abuts a Rear Zone Lot Line/no alley (min)	0' <del>/10'</del>
Rear adjacent to Protected District, where no Aalley	10/
(public or private) abuts a Rear Zone Lot Line	10′
PARKING	
Surface Parking between building and Not Allowed/Allov	ved Not Allowed/Not Allowed
Primary Street/Side Street	
Vehicle Access Shall be determine	ed as part of Site Development Plan Review
DESIGN ELEMENTS	G-MS-3, -5
BUILDING CONFIGURATION	, .
*Canopy  *Canopy  *Canopy  *Canopy  *Canopy  *Canopy  Used to meet a portion  Primary or Side Street	y or Side y may be n of the Primary and Side Street  Canopy may be used to meet a portion of the Primary and Side Street
Screening Required Street frontage, excluding 0'/15', following the	within 0'/15' for 100% of the Primary and Side ng access points and portions of building within ne standards of Article 10, Section 10.5.4.4
Upper Story Setback Above 27', adjacent to Protected District: Rear, alley/Rear, no alley and Side Interior (min)	15′/25′
STREET LEVEL ACTIVATION	
Transparency, Primary Street (min) 40%	60%
Transparency, Side Street (min) 25%	25%
Dedication Access Driver on Character	Entrance
Pedestrian Access, Primary Street Entrance	Littance

В

С D Е For Primary Structures constructed on or before June 25, 2010, all permitted Primary Uses shall be allowed within this building form; however, for Primary Structures constructed after June 25, 2010, Primary Uses shall be limited to Automobile Services, Light and/or Primary Use with Accessory Drive Thru Uses, excluding Eating & Drinking Establishments.

See Division 6.4 Uses and Required Minimum Parking

# I. Drive Thru Restaurant







# **DRIVE THRU RESTAURANT**

APPLICABILITY		All G-MS, G-MX			
	Form is not permitted on Zone Lots within 1/4 mile of the outer boundary of a Rail				
	Transit Station Platform				
HEIGHT		All G-MX, G-MS			
Stories (max)		3			
Feet (min/max)		45′			
	All G-MS	All G-MX	All G-MX		
SITING		Option A	Option B		
REQUIRED BUILD-TO					
Primary Street (min % within min/max)	Corner Lots: 50% 0'/5' All other: 75% 0'/5'	Corner Lots: 50% 0'/10' All other: 70% 0'/10'	Corner Lots: 50% 0'/35' All other: 70% 0'/10'		
Side Street (min % within min/max)	50% 0′/5′	50% 0′/10	50% 0′/18′		
SETBACKS					
Primary Street (min)	0'	0′	0'		
Side Street (min)	0'	0′	0'		
Side Interior (min)	0′	0′	0′		
Side Interior, adjacent to Protected District	10/	10/	10/		
(min)	10′	10′	10′		
Rear (min)	0′	0'	0'		
Rear, adjacent to Protected District, where					
Aalley (public or private) abuts a Rear Zone	0' <del>/10'</del>	0' <del>/10'</del>	0′ <del>/10′</del>		
Lot Line/no alley (min)					
Rear, adjacent to Protected District, where no Aalley (public or private) abuts a Rear	10′	10′	10′		
Zone Lot Line	10	10	10		
PARKING					
Surface Parking between building and	Not Allowed/Not Al-	Not Allowed/Not Al-			
Primary Street/Side Street	lowed	lowed	Not Allowed/Not Allowed		
Drive Thru Lane between building and	Not Allowed/Not Al-	Not Allowed/Not Al-	Allowed/Allowed		
Primary Street/Side Street	lowed	lowed			
Drive Thru Lane Width (max)	na	na	12′		
Drive Thru Lane Screening Required	na	na	Garden Wall, following the standards of Article 10, Section 10.5.4.4		
Vehicle Access	Shall be deter	mined as part of Site Deve			
		All G-MX	All G-MX		
DESIGN ELEMENTS	All G-MS	Option A	Option B		
BUILDING CONFIGURATION					
Upper Story Setback Above 27', adjacent to Protected District: Rear, alley/Rear, no alley and Side Interior (min)	15′/25′	15′/25′	15′/25′		
STREET LEVEL ACTIVATION					
Transparency, Primary Street (min)	60%	40%	40%		
Transparency, Side Street (min)	25%	25%	25%		
Transparency, side street (IIIII)	<b>2J</b> 70	ZJ 70			
Pedestrian Access, Primary Street	Entrance	Entrance	Entrance and Pedestrian Connection		
USES		All G-MS, G-MX Zone Dis	stricts		

Α

В

С D

Е

For Primary Structures constructed on or before June 25, 2010, all permitted Primary Uses shall be allowed within this building form; however, for Primary Structures constructed after June 25, 2010, Primary Uses shall be limited to an Eating & Drinking Establishment Primary Use with Accessory Drive Thru Use Only. See Division 6.4

Uses and Required Minimum Parking

## J. General





# **GENERAL**

USES

meeting Build-To requirement)

**Permitted Primary Uses** 

Street Level Active Uses (min % of Primary Street frontage

	HEIGHT	G-MX-3
	Stories (max)	3
	, ,	
	Feet (max)	4/55'
	Stories/Feet, with incentives (max)	4/33 See Section 10.12.1
		See Section 10.12.1
	SITING	G-MX-3
	REQUIRED BUILD-TO	CIIIX
Δ	Primary Street (min build-to % within min/max range)	70% 0′/10′
^	SETBACKS	70/00/10
		0/
	Primary Street (min)	0′
	Side Street (min)	0′
	Side Interior (min)	0′
В	Side Interior, adjacent to Protected District (min)	10′
	Rear (min)	0'
	Rear, adjacent to Protected District, where Aalley (public	0' <del>/10'</del>
	or private) abuts a Rear Zone Lot Line/no alley (min)	
	Rear, adjacent to Protected District, where no Aalley (pub-	10'
	lic or private) abuts a Rear Zone Lot Line	
	PARKING	
С	Surface Parking between building and	Not Allowed <del>/Allowed</del>
	Primary Street/ <del>Side Street</del>	
С	<u>Surface Parking between building and</u> Side Street	Allowed
П	Surface Parking Screening	See Division 10.5
_	Surface Faiking Screening	Shall be determined as part of Site
	Vehicle Access, all other permitted uses	Development Plan Review
		Development fair neview
	DESIGN ELEMENTS	G-MX-3
	BUILDING CONFIGURATION	
	DOLD III COM I COM III COM	Structure may contain Side-by-Side Dwelling Units
	Dwelling Unit Configuration	Residential Only Structure: Side-by-Side Dwelling Units
	- · · · · · · · · · · · · · · · · · · ·	shall not exceed 50% of the Structure's GFA
Е	Upper Story Setback Above 27', adjacent to Protected	
=	District: Rear, alley/Rear, no alley and Side Interior (min)	15'/25'
	STREET LEVEL ACTIVATION	
F	Transparency, Primary Street (min)	40%
G	Transparency, Side Street (min)	25%
Н	Pedestrian Access, Primary Street	Entrance
	·	

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

G-MX-3

40%

All permitted Primary Uses shall be allowed within this

building form. See Division 6.4

# K. Shopfront



# **SHOPFRONT**

				G-MS-3	
	HEIGHT	G-RX-3	G-RX-5	G-MX-3	G-MS-5
	Stories (max)	3	5	3	5
Α	Feet (min/max)	na/45'	na/70'	na/45′	24'/70'
	Stories/Feet, with incentives (max)	4/55'	7/95'	4/55'	7/95'
		See Section 10.12.1			
	Feet, within 175' of Protected District (max)	na	75'	na	75'

				G-MS-3			
	SITING	G-RX-3	G-RX-5	G-MX-3	G-MS-5		
	REQUIRED BUILD-TO						
В	Primary Street (min build-to % within min/max range)	75% 0'/10'	75% 0′/10′	759 0'/5' Residential Onl	-		
С	Side Street (min build-to % within min/max range)	na	na	259 0'/5' Residential Onl	-		
	SETBACKS						
	Primary Street (min)	0'	0′	0′	0′		
	Side Street (min)	0'	0′	0′	0′		
	Side Interior (min)	0'	0′	0′	0′		
D	Side Interior, adjacent to Protected District (min)	10'	10′	10'	10'		
	Rear (min)	0'	0′	0′	0′		
	Rear, adjacent to Protected District, where Aalley (public or private) abuts a Rear Zone Lot Line/noalley (min)	0′ <del>/10</del> ′	0′ <del>/10</del> ′	0' <del>/10'</del>	0' <del>/10'</del>		
	Rear, adjacent to Protected District, where no Aalley (public or private) abuts a Rear Zone Lot Line	10′	10′	10′	10′		
	PARKING						
	Surface Parking between building and Primary Street/Side Street		Not Allow	ved/Not Allowed			
Ε	Surface Parking Screening		See D	Division 10.5			
	Vehicle Access, all other permitted uses	Shall be determined as part of Site Development Plan Review					

				G-MS-3	
	DESIGN ELEMENTS	G-RX-3	G-RX-5	G-MX-3	G-MS-5
	BUILDING CONFIGURATION				
	Dwelling Unit Configuration		tructure may contain S / Structure: Side-by-Sid the Stru	,	
	Upper Story Setback Above 27', adjacent to Pro-				
F	tected District: Rear, alley/Rear, no alley and Side Interior (min)	15'/25'	20′/25′	15′/25′	20′/25′
_	Upper Story Setback Above 51′, adjacent to Pro-		25//40/		25//40/
G	tected District: Rear, alley/Rear, no alley and Side Interior (min)	na	35′/40′	na	35′/40′
	STREET LEVEL ACTIVATION				
н	Transparency, Primary Street (min)		_	00% ly Buildings: 40%	
- 1	Transparency, Side Street (min)	25%			
J	Pedestrian Access, Primary Street	Entrance			

USES	All G-RX Districts	G-MS-3, -5 and G-MX-3
Street Level Active Uses (min % of Primary Street	na	100%
frontage meeting Build-To requirement)	iia	100 /0

Permitted Primary Uses	All permitted Primary Uses shall be allowed within this building form; however: (1) Second Story and Above: Residential or Lodging Accommoda- tions Uses Only; and (2) Buildings with No Residential or Lodging Accommo- dation Uses: 10,000 sf GFA max	All permitted Primary Uses shall be allowed within this building form. See Division 6.4
	dation oses. To,000 st dt A max	

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

# SECTION 6.3.4 DETACHED ACCESSORYBUILDING FORM STANDARDS FOR DETACHED ACCESSORY STRUCTURES

# 6.3.4.1 Applicability

All detached accessory structures in all the General Urban Neighborhood Context zone districts

#### 6.3.4.2 General Standards

# A. Detached Accessory Structures Allowed

Allowed detached accessory structures include, but are not limited to the following:

# 1. Structures, Completely Enclosed: (See Division 13.3, Definitions of Words, Terms and Phrases.)

Examples include, but are not limited to, sheds, utility buildings, playhouses, cabanas, pool houses, garages, guard houses, and other similar Completely Enclosed Structures.

# 2. Structures, Partially Enclosed: (See Division 13.3, Definitions of Words, Terms and Phrases.)

Examples include, but are not limited to, carports, gazebos, cabanas, porches, trellises, chicken coops, and other similar Partially Enclosed Structures.

# **3. Structures, Open: (See Division 13.3, Definitions of Words, Terms and Phrases.)** Examples include, but are not limited to, pools and associated surrounds, hot tubs and associated surrounds, decks, balconies, recreational and play facilities, non-commercial barbecues, outside fireplaces, outdoor eating areas, and other similar Open Structures.

# 4. Utilities, and Equipment Common and Customary to the Primary Structure and/or Use

Examples include, but are not limited to the following:

- a. Radio and Television Receiving Antennas and Support Structures Permitted accessory radio and television receiving antennas and support structures shall include satellite dishes less than 32 inches in diameter, and one amateur radio sending and receiving antenna and support structures provided for same.
- b. Solar thermal and photo-voltaic energy systems
- c. Air conditioning units Ground-mounted mechanical equipment such as air conditioning units and heat pumps
- d. Pool pumps, heating and water filtration systems
- e. Mailboxes including individual mailbox structures and cluster box units (CBUs)
- f. Other similar Detached Accessory Structures, Utilities, and Equipment Common and Customary to the Primary Structure and/or Use

## 5. Fences, Walls and Retaining Walls

All accessory fences, wwalls, and relatining wwalls, including fences and wwalls used for required screening, shall comply with the fence, wwall, and screening standards in Division 10.5 instead of this Section 6.3.4.

# 6. Accessory Structures Not Listed

- a. The Zoning Administrator shall determine and impose limitations on accessory structures not otherwise listed as allowed in an applicable Use Table in Articles 3 through 9, or not otherwise covered by the standards in this Section 6.3.4.
- b. All such determinations shall be reviewed according to the procedures and review criteria stated in Section 12.4.6, Code Interpretations and Determination of Unlisted Uses. In addition to the criteria stated in Section 12.4.6, the Zoning

Administrator shall determine whether a proposed accessory structure is common and customary to the primary structure on the zone lot or to a specific primary use, and if the structure is incidental to the primary structure(s) on the zone lot or to a specific primary use.

- c. The Zoning Administrator may impose limitations on the proposed accessory structure, which shall be uniform throughout the zone district, and taking into consideration the size of the accessory structure, the total number of structures on the zone lot, and the effect on adjacent property.
- d. Matters that may be regulated according to this Section shall include, but shall not be limited to, the size, area and number of accessory structures, except as specifically permitted or excluded by Articles 3 through 9, or by this Section 6.3.4.

# **6.3.4.3** Supplemental Standards

# A. Additional Standards for Detached Accessory Structures in All Zone Districts

# 1. Building Coverage

All detached accessory structures on a zone lot, together with the primary structure(s) on such zone lot, shall not exceed any maximum building coverage standard (taking into account any permitted exemptions) applicable in the subject zone district for a particular primary building form (e.g., the suburban house, urban house, and duplex building forms are all subject to a maximum building coverage standard).

#### 2. Public Art

A detached accessory structure may be allowed to exceed any Detached Accessory Building Form standard if it is a "work of Public Art" as defined by Section 20-86 of the Denver Revised Municipal Code, as determined by the Zoning Administrator with input from Denver Arts and Venues, and if the Zoning Administrator determines that such exception (1) will have no adverse impacts on abutting property, and (2) shall not substantially harm the public health, safety, and general welfare.

# B. Additional Standards Required Building Materials for <u>Detached</u> Accessory Structures Accessory to Single Unit Dwellings

# 1. Required Building Materials

All accessory structures accessory to primary single unit dwelling use shall be constructed of materials that are (1) compatible with the materials employed on the primary building, (2) durable, and (3) are not constructed and not from salvaged materials such as doors, or other similar materials as designated by the Zoning Administrator.

## C. Additional Standards for General Detached Accessory Structure Building Forms

#### 1. Applicability

This section applies to the <u>General</u> Detached <u>Accessory</u> Structure <u>accessory</u> building forms only.

#### 2. Limit on Gross Floor Area

If an accessory use is operated partially or entirely in one or more  $\frac{\text{General Dd}}{\text{etached}}$  etached accessory structures, the gross floor area of such  $\frac{\text{detached accessory}}{\text{detached accessory}}$  structures shall not exceed 10 percent of the area of the  $\frac{\text{zZ}}{\text{cone }}$  in  $\frac{\text{Lot}_{.;}}{\text{provided}}$ ,  $\frac{\text{hH}}{\text{etached}}$  owever,  $\frac{\text{that}}{\text{this }}$  this limitation shall not apply to  $\frac{\text{General Dd}}{\text{cessory}}$  structures with vehicle access doors.

This page intentionally left intentionally blank.

# 6.3.4.4 District Specific Standards Summary

The table below states the building forms allowed in each zone district. The table also summarizes the maximum number of structures allowed per Zone Lot, which is stated in more detail in Section 1.2.3.5 (Number of Uses and Structures Allowed per Zone Lot).

See also Division 1.4, Building Form Standards - General Provisions, for additional standards related to initial assignment of building form standards to new and existing structures and for rules governing combining or changing building forms. See Section 1.4.6, Change in Building Form Assignment for Certain Detached Accessory Structures. Building Connectors between two detached structures shall follow the standards provided in Section 1.4.5.


Note: The table below is intended to show that we are proposing to combine Other Detached Accessory Structures with Detached Garages and Detached Accessory Structures into a single building form called General Detached Structure. The red boxes under General Detached Structure for the Commercial Corridor, Mixed Use, and Main Street districts show that those standards are being moved to the combined building form. We'll also add a new building form for Minor Detached Structures.

Zone Districts of Det Acces		Max Number	Building Forms			
		of Detached Accessory Structures per Zone Lot	Detached Accessory Dwelling Unit	General Detached Structure Garage	Other Minor Detached Accessory Structures	Detached- Accessory Structures
Row House (RH)	G-RH-3	no max	-			
AA. Jet I I te (AAI I)	G-MU-3, -5	no max				
Multi Unit (MU)	G-MU-8, -12, -20	no max				
Residential Office (RO)	G-RO-3, -5	no max				
Residential Mixed Use (RX)	G-RX-3, -5	no max	_	•		<u>/</u>
Mixed Use (MX)	G-MX-3	no max	-			/=
Main Street (MS)	G-MS-3, -5	no max	-	•		/ -

■ = Allowed □ = Allowed subject to limitations \*One per dwelling unit for structures with vehicle access doors, See Section 1.2.3.5

Note to reviewers: The proposed amendment to extend the Detached Accessory Dwelling Unit building form allowance to the G-RX-3, -5, G-MX-3, and G-MS-3, -5 zone districts is intended to allow the form in every zone district where the ADU use is allowed and a primary building form listed in Section 11.8.2.1.A.2 is also allowed. This proposed amendment preserves the existing allowance for ADU uses in the Detached Accessory Structures building form, meaning that an applicant could locate an ADU in the Detached Accessory Dwelling Unit building form (allows greater height flexibility) or in the Detached Accessory Structures building form (allows greater setback flexibility) in the E-MX-2x, E-MX-2, -2A, 3, 3A, E-MS-2x and E-MS-2, -3, -5 zone districts.

# 6.3.4.5 District Specific Standards

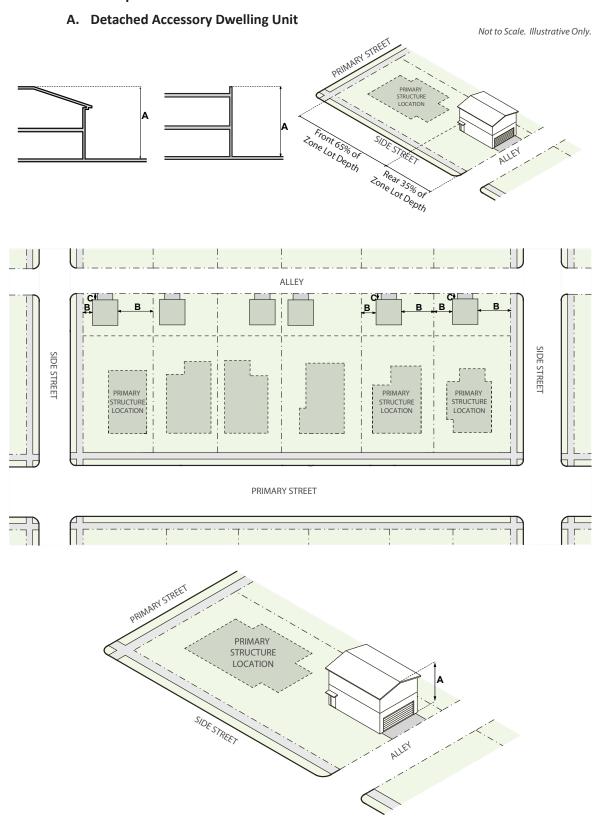

# **DETACHED ACCESSORY DWELLING UNIT**

			<u>All G-MU, RO, RX, MX, MS <del>All</del></u>
	HEIGHT	G-RH-3	<del>G-MU, -RO</del> <del>All G-RX, -MX, -MS</del>
		0-1111-5	All G-IX, -WIX, -WIS
Α	Stories (max)	2	2
Α	Feet (max)	24′	24′
	Bulk Plane Vertical Height at Side Interior Zone Lot Line	12'	na
	Bulk Plane Slope from Side Interior Zone Lot Line	45°	na
			<del>- '</del>

			All G-MU, RO, RX, MX, MS All- G-MU, -RO	
	SITING	G-RH-3	All G-RX, -MX, -MS	
	ZONE LOT			
	Exception from Included in Maximum Building	Yes - amount of coverage ba	sed on Primary Structure building	
	Coverage_per Zone Lot	<u>form</u> -See	Section 6.3.7.5	
	Additional Standards	See Se	ctions 6.3.4.3	
	SETBACKS			
	Location of Structure	Located in the rear	35% of the zone lot depth	
В	Side Interior and Side Street (min)	3'		
	Rear, where no Alley (public or private) abutsting Rear Zone Lot Line	5′	5′	
С	Rear, where garage doors face Alley (public or private) (min)	5′	5′	
	Rear, <u>for portion of structure</u> where garage doors do not face Alley ( <u>public or private</u> ) (min)	0′	0′	
	PARKING			
	Vehicle Access	From Alley (public or private); or Street access allowed whe Alley present		
See Sec. 6.3.7.6 for exce		.7.6 for exceptions		

		All G-MU, RO, RX, MX, MS All
DESIGN ELEMENTS	G-RH-3	<del>G-MU, -RO</del> <del>All G-RX, -MX, -MS</del>
BUILDING CONFIGURATION		Tan Citaly may me
Building Footprint (max)	1,000 sf per unit	1,000 sf per unit
Rooftop <del>and/</del> or Second Story Decks	See Section 6.3.5.2	

USES	G-RH-3	All G-MU, RO, RX, MX, MS All-
		<del>G-MU, -RO</del>


An Accessory Dwelling Unit use must be concurrently permitted and approved for occupancy in this building form. The Accessory Dwelling Unit use may be combined with other uses Accessory to Primary Residential Uses. See Division 6.4 for permitted Uses Accessory to Primary Residential Uses


See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions




# B. **General** Detached **Structure Garage**

Not to Scale. Illustrative Only.



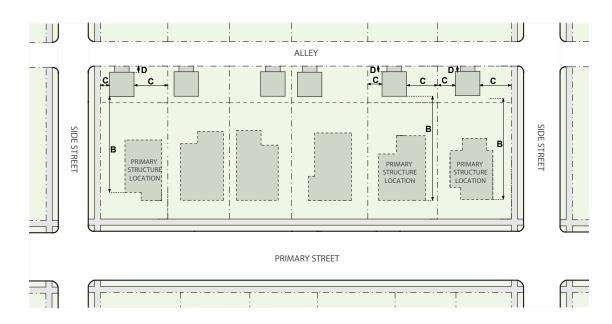

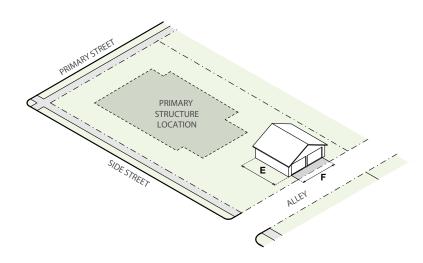

# **GENERAL-DETACHED GARAGE-STRUCTURE**

Examples of General Detached Structures include garages, sheds, and gazebos. The General Detached Structure building form provides standards for structures accessory to a primary structure that exceed the standards for a Minor Detached Structure.

	HEIGHT	All G-RH, -MU, -RO	All G-RX, -MX, -MS		
	Stories (max)	1	1		
Α	Feet (max)	17′	17′		
	SITING	All G-RH, -MU, -RO	All C DV MV MC		
	ZONE LOT	All G-RH, -WO, -RO	All G-RX, -MX, -MS		
	ZONE LOT	Yes - amount of coverage based on Pri-			
	Included in Maximum Building Coverage per Zone Lot	mary Structure building form See Section	na		
	(max) Exception from Maximum Building Coverage	<del>6.3.7.5</del>	<u></u>		
	Additional Standards	See Sections 6.3.4.3			
	SETBACKS				
		Located a minimum of 10' behind 75% of t			
В	Location of Structure	Street-facing feacade(s) of one Primary Stru			
		for applicable location standard when ther			
C	Side Street (min)	tures on one Zone	<u>-</u>		
	Side Interior (min), for structure entirely in rear 35% of zone	5′	5'		
С	lot depth**	0′	5'		
	Side Interior (min), for structure not entirely in rear 35% of	F.'	r!		
	zone lot depth	5′	5'		
	Side Interior (min), for structure not entirely in rear 35% of	3′	5'		
	zone lot, where Zone Lot Width is 30' or less				
D	Rear, where no a Alley (public or private) abuts a Rear Zone	5′	5'		
	Lot Line (min)  Rear, where a Alley (public or private) abuts a Rear Zone Lot				
	Line, and where garage doors face <u>aAlley*</u> (min)	5′	5'		
	Rear, where a Alley (public or private) abuts a Rear Zone Lot	0/	01		
	<u>Line-and</u> where garage doors do not face <del>a</del> Alley** (min)	0′	0'		
	PARKING				
		From Alley; or Street access allowed when			
	Vehicle Access	no Alley (public or private) present	na		
		See Sec. 6.3.7.6 for exceptions			
	DESIGN ELEMENTS	All G-RH, -MU, -RO	All G-RX, -MX, -MS		
	BUILDING CONFIGURATION	All G-NH, -WO, -NO	All G-NA, -IVIA, -IVIS		
	DOILDING CONFIGURATION				
	Puilding Egotorint (may)	1 000 964 of nov unit*	1,000 of		
	Building Footprint (max)	<u>1,000</u> <del>864</del> sf per unit*	1,000 sf 10% of the Zone Lot,		
			providedhowever, this		
	Gross Floor Area (max)	<u>na</u>	restriction shall not apply to		
	,	<del>_</del>	the parking of vehicles. See		
			Section 6.3.4.3		
Ε	Overall Structure Length (max)	36' per unit	<u>36′</u>		
F	Allowed Number of Vehicular Access Doors (max)	3 per unit	<u>na</u>		
F	Cumulative Width of All Vehicular Access Doors (max)	28' per unit	<u>na</u>		
	USES	All G-RH, -MU, -RO	All G-RX, -MX, -MS		

Accessory Uses Only, excluding accessory dwelling unit where permitted. See Division 6.4 for permitted Accessory Uses.

**Accessory Uses Only** 


\*See Section 10.4.6 Vehicle Parking Design for standards that may be more restrictive.


See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

\*When used with a Primary Single Unit Dwelling Use, the permitted building footprint for a detached garage may be increased to 1,000 sf


\*\*Setbacks less than 5' may be subject to more restrictive building and fire code review - Side facing gable roof ends are not permitted where setbacks are less than 5' \*

# **C.** Minor Detached Structures

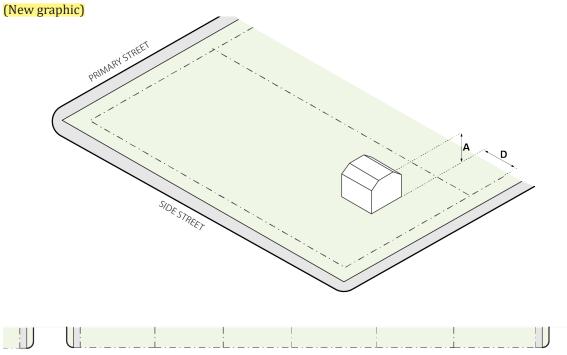

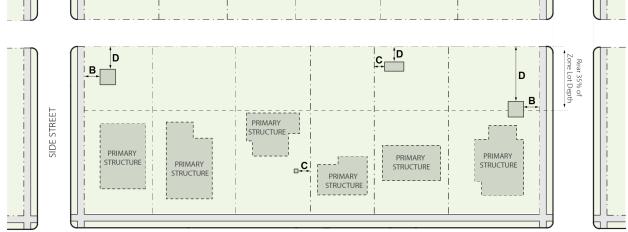

PRIMARY STREET

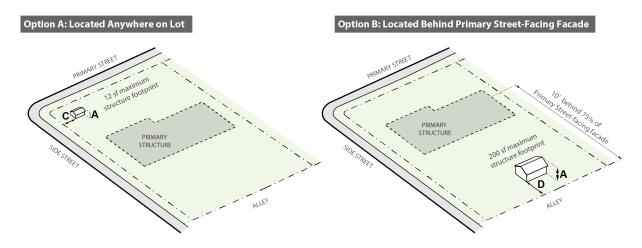

All G-RH, MU, RO, RX, MX, MS Districts

# MINOR DETACHED STRUCTURES

Zone Lot Line (min)

Ε

Building Coverage per Zone Lot (max)

Structures that meet the standards in this building form table are exempt from the requirement to obtain a zoning permit. Examples of Minor Detached Structures include sheds, arbors, play structures, ground-mounted mechanical equipment such as air conditioning units and heat pumps, and other structures that are similarly minor in impact, height, and footprint. Option A is more limited than Option B in height and footprint, but offers more flexibility in siting. Structures that do not meet the standards in the table below shall be reviewed under the General Detached Structure building form.

	HEIGHI	Option A*	Option B*	
Α	Stories (max)	<u>1</u>	1	
Α	Feet (max)	<u>4'</u>	<u>14′</u>	
		All G-RH, MU, RO, RX, M	X, MS Districts	
	<u>SITING</u>	Option A	Option B	
	Total number of each structure (max)	<u>na</u>	<u>na</u>	
	LOCATION OF STRUCTURE			
	Ground-Mounted Mechanical Equipment	Shall be located a minimum of 10' behind 75% of the total width of the Primary Street-facing Façade**	Shall be located a minimum of 10' behind 75% of the	
	Public Utility Equipment	Allowed anywhere on the Zone Lot	total width of the Primary	
	All Others	Allowed anywhere on the Zone Lot	Street-facing Façade**	
	<u>SETBACKS</u>			
В	Side Street (min)	<u>5′</u>	<u>5′</u>	
С	Side Interior, for structure entirely in rear 35% of zone lot (min)	<u>O'</u>	<u>0′</u>	
	Side Interior, for structure not entirely in rear 35% of zone lot (min)	<u>5′</u>	<u>5′</u>	
D	Rear, where no Alley (public or private) abuts Rear Zone Lot Line (min)	<u>5′</u>	<u>5′</u>	
	Rear, where Alley (public or private) abuts Rear	0'	0'	

	All G-RH, MU, RO, RX, MX, MS Districts		
DESIGN ELEMENTS	Option A	Option B	
<b>BUILDING CONFIGURATION</b>			
Structure footprint (max)	<u>12 sf</u>	<u>200 sf</u>	

<u>USES</u>
<u>All G- Zone Districts</u>

Accessory Uses Only, excluding accessory dwelling unit use and parking and storage of vehicles. See Division 6.4 for permitted Accessory Uses.

See maximum Building Coverage per Zone Lot in the Primary

Structure building form table.


See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives, and Design Standard Exceptions.


\* Standards in the "Option A" column may not be combined with standards in the "Option B" column. For example, If using Option B height standards to construct a 14-foot-tall structure, the structure must also follow the Option B siting standards that require the structure to be located a minimum of 10 feet behind 75% of the Primary Street-facing Façade.

\*\*When there are multiple Primary Structures on one Zone Lot, all Minor Detached Structures shall be located behind 75% of the total width of the Primary Street-facing Façade(s) of at least one Primary Structure. See Section 13.1.5.12 for applicable location standard when there are multiple Primary Structures on one Zone Lot.

# **D.** Other Detached Accessory Structures

Not to Scale. Illustrative Only.



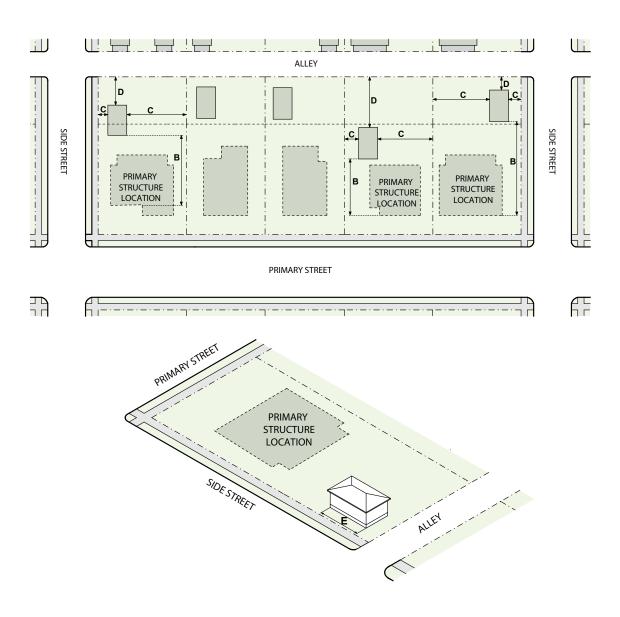

# **OTHER DETACHED ACCESSORY STRUCTURES**

Note: The standards in this table have been moved to the General Detached Structure building form, except the 15' height limit. In the General Detached Structure building form, the height limit is 17'.

**Additional Standards** 

	HEIGHT	All G-RH, -MU, -RO
Α	Stories (max)	1
Α	Feet (max)	<del>15'</del>

	<del>SETBACKS</del>			
		Located a minimum of 10' behind 75% of the total width of		
В	<del>Location of Structure</del>	the Primary Street-facing facade(s) of one Primary Structure;		
		see Section 13.1.5.12 for applicable location standard when there are multiple Primary Structures on one Zone Lot		
С	Side Street (min)	5'		
С	Side Interior (min), for structure entirely in rear 35% of zone lot depth*	θ'		
	Side Interior (min), for structure not entirely in rear 35% of zone lot depth	<i>5</i> ′		
	Side Interior (min), for structure not entirely in rear 35% of zone lot, where Zone Lot Width is 30' or less	3'		
D	Rear, no alley (min)	<i>5</i> ′		
	Rear, alley, where doors face alley (min)	<del>5</del> ′		
	Rear, alley, where doors do not face alley (min)*	θ'		

	DESIGN ELEMENTS	<del>All G-RH, -MU, -RO</del>
	BUILDING CONFIGURATION	
	Building Footprint (max)	<del>1,000 sf</del>
Е	Overall Structure Length (max)	<del>36'</del>
	<del>USES</del>	All G-RH, -MU, -RO

Accessory Uses Only, excluding accessory dwelling unitwhere permitted and parking of vehicles.
See Division 6.4 for permitted Accessory Uses


All G-RH, -MU, -RO


See Sections 6.3.4.3


See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions \*Setbacks less than 5' may be subject to more restrictive building and fire code review - Side facing gable roof ends are not permitted where setbacks are less than 5'

# **E.** Detached Accessory Structures

Not to Scale. Illustrative Only.



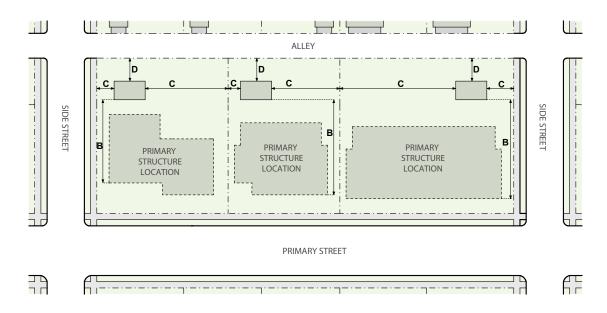

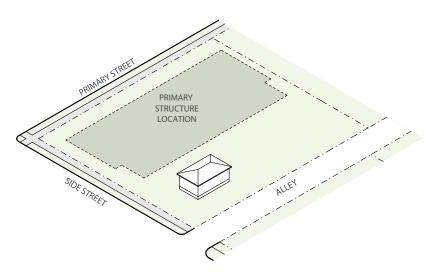

# **DETACHED ACCESSORY STRUCTURES**

	HEIGHT	All G-RX,-MX,-MS
Α	Stories (max)	1
Α	Feet (max)	<del>17'</del>
	<del>SITING</del>	All G-RX, -MX, -MS
	Additional Standards	See Section 6.3.4.3
	<b>SETBACKS</b>	
		Located a minimum of 10' behind 75% of the total width of the
R	Location of Structure	Primary Street-facing facade(s) of one Primary Structure; see Section
_	Location of Structure	13.1.5.12 for applicable location standard when there are multiple
		Primary Structures on one Zone Lot
С	Side Interior and Side Street (min)	<u>5′</u>
	Rear, no Aalley (min)	<del>5'</del>
D	Rear, alley, where garage doors face Aalley (min)	<i>5</i> '
	Rear, alley, where garage doors do not face Aalley (min)	θ'
	<del>DESIGN ELEMENTS</del>	All G-RX, -MX, -MS
	C	10% of the Zone Lot, provided this restriction shall not apply to the
	Gross Floor Area (max)	parking of vehicles. See Section 6.3.4.3
	<del>USES</del>	All G-RX,-MX,-MS
		Accessory Uses Only

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

# SECTION 6.3.5 SUPPLEMENTAL DESIGN STANDARDS

# 6.3.5.1 Surface Parking Between the Building and the Primary/Side Street

## A. Intent

Allow for the functional siting of Buildings and Surface Parking while continuing to minimize the impacts of Surface Parking on the pedestrian experience.


# **B.** Applicability

This Section 6.3.5.1 applies to the Shopfront building form in the G-MS and G-RX zone districts.

# C. Surface Parking Not Allowed

Where a building form specifies that Surface Parking is not allowed between a Building and a Primary Street and/or Side Street, Surface Parking shall not be located in the area directly between the applicable Street and any portion of a Building Facade set back 65 feet or less from the Zone Lot Line abutting the applicable Street and the Street. Surface Parking shall be allowed in the area directly between the applicable Street and any portion of a Building Facade set back more than 65 feet from the Zone Lot Line abutting the applicable Street and the Street.

Figure 6.

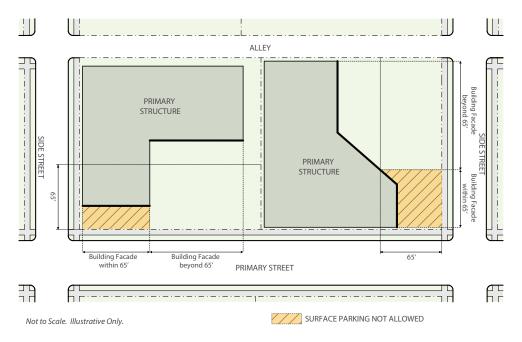

# 6.3.5.2 Rooftop and/or Second Story Decks

#### A. Intent

To protect the privacy of adjacent rear yards in low-scale residential neighborhoods and to allow for a small outdoor space for Detached Accessory Dwelling Units.

#### B. Applicability

This Section 6.3.5.2 applies to the following:

- 1. aAll the G-MU, G-RO, G-RX, G-MX and G-MS zone districts when using the following building forms under the listed conditions:
  - a. A Town House or Garden Court building form; or
  - b. A Detached Accessory Dwelling Unit accessory building form when accessory to a Town House primary building form; and


c. in all the G-MU, G-RO, G-RX, G-MX and G-MS zone districts wWhen the Zone Lot is adjacent to a zone district with a limitation on rooftop and/or second story decks in the rear 35% of the Zone Lot dDepth.

# C. Supplemental Design Standard

- 1. Rooftop and/or Second Story Decks are prohibited in the rear 35% of the zone lot depth, except with a Detached Accessory Dwelling Unit building form.
- 2. A Rooftop and/or Second Story Deck with a Detached Accessory Dwelling Unit building form is subject to the following limits:
  - a. Shall only be allowed when the subject property has a <u>rR</u>ear <u>zZ</u>one <u>lL</u>ot <u>lL</u>ine that abuts an Alley;
  - b. Must be sited entirely within 15 feet of the <u>rR</u>ear <u>zZ</u>one <u>lL</u>ot <u>lL</u>ine abutting an Alley;
  - c. May have an upper walking surface with a maximum area of 100 square feet, including posts, railings, walls or other structural features, but excluding any above grade stairways at the Street Level connected to a Rooftop and/or Second Story Deck;
  - d. May encroach into a required setback only if the Rooftop and/or Second Story Deck complies with the additional standards stated in Sec 6.3.7.4 Setback Exceptions.; and
  - e. The upper walking surface of the Rooftop and/or Second Story Deck may not exceed 14 feet in height.
- 3. The Zoning Administrator may prohibit other similar structures in the rear 35% of the Zone Lot dDepth, including detached or freestanding structures but excluding the detached accessory dwelling unit building form where allowed, when the Zoning Administrator finds the structure would have similar adverse privacy impacts as the specifically prohibited Rooftop and/or Second Story Deck.

# 6.3.5.3 Garden Court

- A. The Garden Court shall include all of the following characteristics:
  - 1. Located at natural grade;
  - 2. Visually and physically accessible from the primary street; may be secured for private use:
  - 3. A minimum of 50% of the required Garden Court area shall be landscaped with live planting material, according to Section 10.5.4.6 Landscaping Material Standards;
  - 4. Open to the sky, except one single-story Unenclosed Porch, Canopy, or shading device per Dwelling Unit associated to a Entrance may encroach no more than 5 feet in depth into the Garden Court; and
  - 5. Bounded on not less than 3 sides with related Dwelling Unit building facades on the same Zone Lot.
    - a. For purposes of this section, "related" shall mean either connected building facades, or multiple building facades with a maximum separation between building facades of 15 feet.

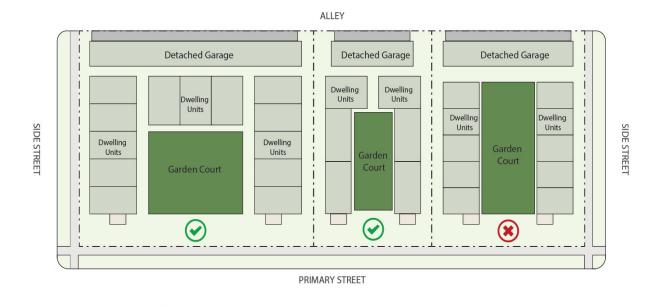

B. The Garden Court area may be used for any of the following:

Does Meet Standard

1. Single or multiple entries, or access to single or multiple entries, to uses within the buildings; or

Does NOT Meet Standard

- 2. Public or private landscaped area; may also include entries.
- C. Vehicular access is not permitted through the Garden Court area.

#### 6.3.5.4 Street Level Active Uses in the G-MX and G-MS Zone Districts

#### A. Intent

To promote activity on the street and sidewalk, enhance safety and encourage a vibrant urban environment.

## B. Applicability

This Section 6.3.5.3 applies to the Town House, General, and Shopfront building forms in the G-MX zone districts and the Town House and Shopfront building form in the G-MS zone districts.

#### C. Street Level Active Uses

- 1. Street Level active uses include all permitted primary uses except the following:
  - a. Mini-storage Facility; or
  - b. Wholesale Trade or Storage, Light.
- 2. Street Level active uses include all permitted accessory uses except the following:
  - a. Car Wash Bay Accessory to Automobile Services or Hotel Uses; or
  - b. Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses.
- 3. Street Level active uses shall not include Parking Spaces or Parking Aisles.

- 4. Street Level active uses shall occupy Street Level floor area for a minimum depth of 15 feet (may include the depth of a recessed entrance allowed to meet minimum pedestrian access standards).
- 5. The length of any build-to alternatives, except Arcades, permitted by Section 6.3.6.1 shall not apply toward the required percentage of Street Level building frontage that must be occupied by a Street Level active use.
  - a. An Arcade may contribute to the Street Level Active use requirement for a maximum of 6 feet of the required 15 foot depth.
- 6. The portion of the Street Level building frontage that meets the Street Level active use requirement shall contain at least one window or door that meets the minimum transparency requirement standards in Section 13.1.6.3.A.4.

# 6.3.5.5 Dwelling Units Oriented to the Street

#### A. Intent

To ensure that buildings containing Side-by-Side Dwelling Units contribute to vibrant pedestrian-oriented street frontages with Dwelling Units that clearly Orient to the Street.

# **B.** Applicability

This Section 6.3.5.5 shall apply to development under the Town House building form in all G-MU, G-RO, G-RX, G-MX, and G-MS zone districts when required by the building form standards.

## **Supplemental Design Standard**

- 1. On an Interior Zone Lot, Dwelling Units must be oriented to the Primary Street Zone Lot Line.
- 2. On a Zone Lot with more than one street frontage, Dwelling Units shall be oriented to the Primary Street Zone Lot Line or Side Street Zone Lot Line.

## a. All G-MX, G-MS and G-RX zone districts


In the G-RX, G-MS, and G-MS zone districts, the following standards shall apply.

- i. Dwelling Units located within 20 feet of the Primary Street Zone Lot Line shall be oriented to the Primary Street Zone Lot Line.
- ii. Dwelling Units located within 20 feet of the Side Street Zone Lot Line shall be oriented to the Side Street Zone Lot Line.
- iii. Dwelling Units located within both 20 feet of the Primary Street Zone Lot Line and Side Street Zone Lot Line shall be oriented to the Primary Street Zone Lot Line.

# b. All G-MU and G-RO zone districts

In the G-MU and G-RO zone districts, the following standards shall apply.

- i. Dwelling Units located within 30 feet of the Primary Street Zone Lot Line shall be oriented to the Primary Street Zone Lot Line.
- ii. Dwelling Units located within 20 feet of the Side Street Zone Lot Line shall be oriented to the Side Street Zone Lot Line.
- iii. In the G-MU-3 zone district, Dwelling Units located within both 30 feet of the Primary Street Zone Lot Line or Side Street Zone Lot Line shall be oriented to the Primary Street Zone Lot Line.

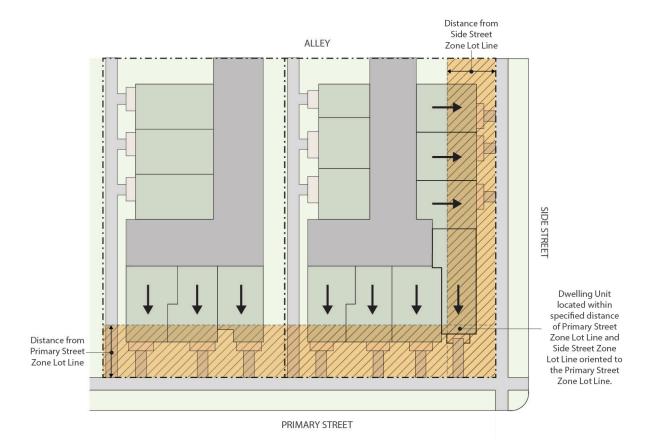

# c. All G-MU, G-RO, G-MX, G-MS and G-RX zone districts

In the G-MU, G-RO, G-RX, G-MS, and G-MS zone districts, a Zone Lot with more than one Primary Street, the following standards shall apply.

- i. The Zoning Administrator shall determine the street to which the corner Dwelling Unit shall orient based on an analysis, at a minimum, of:
  - a) The prevailing building orientation and setback patterns of buildings located on the same face block(s) as the subject Zone Lot;
  - b) Block and lot shape;
  - c) The functional street classification of all abutting streets as adopted by the Department of Transportation and Infrastructure ("DOTI");
  - d) The future street classification of all abutting streets as adopted in Blueprint Denver; and
  - e) Guidance provided in any applicable General Development Plan or regulating neighborhood plan, such as designation of pedestrian priority streets in such plan.

# 6.3.5.6 Height for Sloped Roofs

#### A. Intent

To allow for design flexibility for sloped roofs and to promote variations within the building form.

# **B.** Applicability

This Section 6.3.5.6 shall apply to development under the Town House or Garden Court building form standards in all G-MU, G-RO, G-RX, G-MX, and G-MS zone districts.

# **Supplemental Design Standard**

- 1. For the portion of the roof with a minimum pitch of 6:12, the maximum building height for the subject portion shall be:
  - a. 45-feet in 3-story RX, MX, MS zone districts, and
  - b. 40-feet in 3-story MU and RO zone districts.
- 2. Development of a primary building with a roof with a minimum pitch that takes advantage of the maximum height allowed per this Section 6.3.5.6 may apply one or more height exceptions allowed in Section 6.3.7.1, except that such height exceptions shall be measured from an allowed maximum of height of:
  - a. 38-feet in 3-story MX, RX, and MS zone districts, and
  - b. 35-feet in 3-story MU and RO zone districts.



# SECTION 6.3.6 DESIGN STANDARD ALTERNATIVES

# 6.3.6.1 Required Build-To Alternatives

#### A. Intent

To help define the public realm and enhance the visual quality of the built environment where it is not possible to define the street and public sidewalk edge with building facades. Additionally, to allow relief for vehicle access when Alley access is not feasible per Section 6.3.7.6 in the Town House building form.

## B. Allowance

The following alternatives may be used singularly or in combination as alternatives to a required build-to standard and may count toward the required build-to no more than as described in the table below, provided all alternatives meet the requirements stated in Section 13.1.5.7.E:

REQUIRED BUILD-TO ALTERNATIVES									
ZONE DISTRICT	BUILDING FORM	PERMA- NENT OUTDOOR PATIO SEATING (MAX IN- CREASE IN BUILD-TO RANGE)	PRIVATE OPEN SPACE (MAX % OF BUILD-TO)	GARDEN WALL (MAX % OF BUILD-TO)	GARDEN WALL WITH COVERED SEATING FOR PE- DESTRIANS (MAX % OF BUILD-TO)	PERGOLA (MAX % OF BUILD-TO)	ARCADE (MAX % OF BUILD-TO)	COURT- YARD (MAX % OF BUILD-TO)	VEHICLE ACCESS (MAX FEET OF BUILD- TO)
G-MU G-RO G-RX G-MX G-MS	Town House	na	na	na	na	na	na	30%	12 feet
G-RX G-MX	All others	na	na	25%*	30%*	30%*	100%	100%	na
G-RH G-MU G-RO G-MS	All others	na	na	25%*	30%*	30%*	100%	na	na

<sup>\*</sup>If used in combination with each other, the garden wall, garden wall with covered seating for pedestrians and pergola alternatives may count toward no more than 30% of required build-to.

# 6.3.6.2 Transparency Alternatives

# A. Intent

To provide visual interest on building facades, to activate the public street and sidewalk, and enhance the visual quality of the built environment along Street Level facade areas where windows do not provide sufficient transparency.

#### B. Allowance

The following alternatives may be used singularly or in combination as alternatives to a required transparency standard and may count toward required transparency no more than as described in the table below, provided all alternatives meet the requirements stated in Section 13.1.6.3.A.5:

TRANSPAR	TRANSPARENCY ALTERNATIVES									
ZONE DISTRICT	ZONE LOT LINE DESIGNATION	DISPLAY CASES AND AUTOMATED TELLER MACHINES (MAX)	WALL DESIGN ELEMENTS (MAX)	PERMANENT OUTDOOR GATHERING AREAS (MAX)	PERMANENT ART (MAX)	COMBINA- TION OF ALTERNA- TIVES (MAX)				
G-MU	Primary Street	<del>40%</del>	<del>50%</del>	60%	40%	80%				
	Side Street	<del>40%</del>	<del>50%</del>	80%	40%	80%				
G-RO	Primary Street	<del>40%</del>	<del>50%</del>	60%	40%	80%				
	Side Street	<del>40%</del>	<del>50%</del>	80%	40%	80%				
G-RX	Primary Street	<del>40%</del>	<del>50%</del>	60%	40%	80%				
	Side Street	<del>40%</del>	<del>-50%</del>	80%	40%	80%				
G-MX	Primary Street	<del>40%</del>	<del>50%</del>	60%	40%	80%				
	Side Street	<del>40%</del>	100%, provided the wall design elements are applied to the entirety (100%) of the length of the Street Level wall.	80%	40%	80%*				
G-MS	Primary Street	<del>40%</del>	<del>50%</del>	60%	40%	50%				
	Side Street	<del>40%</del>	<del>50%</del>	80%	40%	50%				

<sup>\*</sup>Wall design elements that are applied to the entire length of the Street Level wall may count toward up to 100% of required side street transparency.

# 6.3.6.3 Pedestrian Access (Entrance) Alternatives

#### A. Intent

To provide a clear and obvious, publicly accessible route connecting the Primary Street to the primary uses within the building.

## B. Allowance

In the G-RO, G-MU, G-MX and G-RX zone districts for all building forms except the Town House, one of the following may be used as an alternative to a required Entrance, provided that the alternative meets the design standards described in Section 13.1.6.3.B.4:

- 1. Courtyard or Plaza
- 2. Covered Walkway

# SECTION 6.3.7 DESIGN STANDARD EXCEPTIONS

# 6.3.7.1 Height Exceptions

# A. Intent

To allow building features to exceed maximum height for utility purposes and/or limited recreation or building amenities in the higher intensity zone districts/larger forms.

## B. Standard

Except as specifically allowed below:

- 1. No portion of a structure shall project beyond the maximum height in feet specified in the applicable Building Form table, including any incentive height allowed by this code.
- 2. No portion of a structure shall project beyond the bulk plane specified in the applicable Building Form table.
- 3. No portion of a structure shall exceed the maximum height in stories specified in the applicable Building Form table.

# C. Exceptions

The following building features of Primary Structures and Accessory Structures are allowed to exceed height in feet, stories, bulk plane, and upper story setbacks as described in the table below, subject to the following standards.

- Unoccupied elevator penthouses, stair enclosures, and enclosed or unenclosed
  mechanical equipment including vertical or sloped screen walls for such equipment
  granted an exception for height in stories shall only be as large as necessary to achieve
  the intended function of the feature and shall not exceed the minimum required
  dimensions defined in the Denver Building and Fire Code.
- 2. An elevator lobby granted an exception for height in stories shall be no larger in area than the area of the elevator shaft which it abuts, measured to the exterior walls.
- 3. Unoccupied building features shall not include space for living, sleeping, eating, cooking, bathrooms, toilet compartments, closets, halls, storage, or similar space.
- 4. The Zoning Administrator shall determine the applicable feature type and associated height exception standards for a given building feature.
- 5. Where a building feature exceeds the maximum height in feet or the maximum height in stories as allowed in this section, all standards for the applicable feature in the table below shall apply.

BUILDING FEATURES	ZONE DISTRICTS	THE AGGRE- GATE SHALL NOT EXCEED 33-1/3 PER- CENT OF THE AREA OF THE SUPPORTING ROOF	SHALL BE SET BACK FROM THE PERIMETER OF THE BUILDING A MINIMUM OF ONE FOOT HORIZONTALLY FOR EVERY ONE FOOT OF VERTICAL HEIGHT	MAY EXCEED MAXIMUM HEIGHT IN FEET BY:	MAY EXCEED MAXIMUM HEIGHT IN STORIES BY:	MAY PROJECT THROUGH THE BULK PLANE	MAY ENCROACH INTO THE EXCEED UPPER STORY SETBACK HEIGHT BY
Dormers on a Detached ADU building form	All G- Zone Districts	No	No	N/A	N/A	Yes, per Section 13.1.4.3	N/A
Roof Overhangs, gutters, and downspouts, each ex- tending no more than 3-feet measured perpendicular from the exterior face of the Exterior Wall to the furthest edge of the projection	All G- Zone Districts	No	No	Any distance when attached to a feature that meets the definition of a Story	Not applicable	Any distance	Any distance
Unoccupied spires, towers, flagpoles, antennas, chimneys, flues and vents	All G- Zone Districts	No	No	28′	Not applicable	Any distance	Any distance
Unoccupied cooling towers and enclosures for tanks	All 5-Story or greater G-MU, G-RX, G-RO, G-MS Zone Districts	No	Yes	28′	Not applicable	Not allowed	Not allowed

BUILDING FEATURES	ZONE DISTRICTS	THE AGGRE- GATE SHALL NOT EXCEED 33-1/3 PER- CENT OF THE AREA OF THE SUPPORTING ROOF	SHALL BE SET BACK FROM THE PERIMETER OF THE BUILDING A MINIMUM OF ONE FOOT HORIZONTALLY FOR EVERY ONE FOOT OF VERTICAL HEIGHT	MAY EXCEED MAXIMUM HEIGHT IN FEET BY:	MAY EXCEED MAXIMUM HEIGHT IN STORIES BY:	MAY PROJECT THROUGH THE BULK PLANE	MAY ENCROACH INTO THE EXCEED UPPER STORY SETBACK HEIGHT BY
Unoccupied elevator pent- houses, stair enclosures, and enclosed or unenclosed mechanical equipment including vertical or sloped screen walls for such equip- ment.	All 3-Story G-MU, G-RO, G-RX, G-MS, G-MX Zone Districts in the Town House building form	Yes	Yes, from the perimeter of the portion of the building Facing the Primary Street, Side Street, Side Interior or Rear Zone Lot Line.  No, from the perimeter of the portion of the building that does not face a Zone Lot Line.	12'	1 story	Not Allowed	Not Allowed
Unoccupied elevator pent- houses, stair enclosures, and enclosed or unenclosed mechanical equipment including vertical or sloped screen walls for such equip- ment	All 3-Story or lower G-MU, G-RO, G-RX, G-MX, G-MS Zone Districts	Yes	Yes, from the perimeter of the portion of the building facing the Primary Street or Side Street.  Yes, from the perimeter of the portion of the building facing the zone lot line adjacent to a Protected District.  No, all others.	12′	1 story	Not allowed	Not allowed
Unoccupied elevator pent- houses, stair enclosures, and enclosed or unenclosed mechanical equipment including vertical or sloped screen walls for such equip- ment	All 5-Story or greater G-MU, G-RO, G-RX, G-MS Zone Districts	Yes	Yes, from the perimeter of the portion of the building facing the Primary Street or Side Street.  Yes, from the perimeter of the portion of the building facing the zone lot line adjacent to a Protected District.  No, all others.	28′	1 story	Not allowed	Not allowed
Elevator lobbies	All 3-Story or lower G-MU, G-RO, G-RX, G-MX, G-MS Zone Districts	Yes	Yes	12′	1 story	Not allowed	Not allowed
Elevator lobbies	All 5-Story or greater G-MU, G-RO, G-RX, G-MS Zone Districts	Yes	Yes	28′	1 story	Not allowed	Not allowed
Open Structures	All 3-Story or lower G-MU, G-RO, G-RX, G-MX, G-MS Zone Districts	Yes	Yes	12'	Not applicable	Not allowed	Not allowed

BUILDING FEATURES	ZONE DISTRICTS	THE AGGRE- GATE SHALL NOT EXCEED 33-1/3 PER- CENT OF THE AREA OF THE SUPPORTING ROOF	SHALL BE SET BACK FROM THE PERIMETER OF THE BUILDING A MINIMUM OF ONE FOOT HORIZONTALLY FOR EVERY ONE FOOT OF VERTICAL HEIGHT	MAY EXCEED MAXIMUM HEIGHT IN FEET BY:	MAY EXCEED MAXIMUM HEIGHT IN STORIES BY:	MAY PROJECT THROUGH THE BULK PLANE	MAY ENCROACH INTO THE EXCEED UPPER STORY SETBACK HEIGHT BY
Open Structures	All 5-Story or greater G-MU, G-RO, G-RX, G-MS Zone Districts	Yes	Yes	28′	Not applicable	Not allowed	Not allowed
Parapet Wall or Safety Railing	All 3-Story or lower G-MU, G-RO, G-RX, G-MX, G-MS Zone Districts	<u>No</u>	<u>No</u>	Not allowed	Not applicable	Not allowed	<u>4'</u>
Parapet Wall <del>and/</del> or Safety Railing	All 5-Story or greater G- Zone Districts	No	No	Any distance	Not applicable	Not allowed	Not allowed
Flush-mounted sSolar panels	All G- Zone Districts	No	No	Any distance	Not applicable	Any distance	Any distance
Evaporative coolers	All G- Zone Districts	No	Yes	Any distance	Not applicable	Any distance	Any distance
Accessory water tanks	All G-MX, G-MS Zone Districts	No	Yes	28′	Not applicable	Any distance	Any distance
Pedestrian bridge	All G- Zone Districts	Not appli- cable	Not applicable	28′	Any number	Any distance	Any distance

# 6.3.7.2 Required Build-To Exceptions These standards moved to the Rule of Measurement in

#### 13.1.5.7

# A. Civic, Public & Institutional Uses

#### 1. Intent

To accommodate signature entrance architecture, gathering spaces, plazas, or community amenities along the front facades of structures containing civic, public and institutional uses.

## 2. Standard

Structures containing one or more uses in the Civic, Public & Institutional Use Classification are not required to meet the Primary Street and Side Street Build-To standards.

# B. Parkways

# 1. Intent

To ensure structures contribute to the look and feel of a Parkway and great public space along Parkways, when Parkway setbacks are more restrictive than this Code's build-to-range.

## 2. Standard

Where a zone lot has street frontage on a Parkway designated under D.R.M.C, Chapter 49, if the parkway setback is greater than the outer range of the required build-to range, the build-to shall follow the setback established by the Parkway. The minimum build-to percentage shall still apply.

# C. G-MU-3 and G-RO-3 Primary Street Setback

#### 1. Intent

To maintain an established context or pattern by ensuring the Primary Street setback establishes the build-to range.

#### 2. Standard

In the G-MU-3 and G-RO-3 zone districts, when the Primary Street setback is different than the Primary Street required build-to min/max range, the following shall establish the min/max build-to range. In all cases, the minimum build-to percentage shall apply:

- a. The minimum in the build-to min/max range shall follow:
  - i. The Primary Street setback when greater than the min.
  - ii. The build-to min in the min/max range, when the Primary Street setback is less than the min.
- b. The maximum in the build-to min/max range shall follow:
  - i. The Primary Street setback when greater than the max.
  - ii. The build-to max in the min/max range, when the Primary Street setback is less than the max.

# 6.3.7.3 Setback Exception - Parkway

#### A. Intent

To promote compatible building character along Parkways, when Parkway setbacks are more restrictive than this Code's setbacks.

#### B. Standard This standard moved to the Rule of Measurement in 13.1.5.8

In all G- zone districts, where a zone lot has street frontage on a Parkway designated under D.R.M.C., Chapter 49, the greater of the following street setbacks shall apply:

- 1. The street setback required by the applicable building form standards in this Code; or
- 2. The required Parkway setback established under D.R.M.C., Chapter 49.

# 6.3.7.4 Setback Exceptions - Architectural, Site, Service & Utility Elements

# A. Intent

To allow minor elements to encroach into a setback while maintaining an open and unobstructed minimum setback.

#### B. Standard

Except as specifically allowed below, Setbacks specified in the applicable Building Form tables shall be open and unobstructed.

#### C. Exceptions

The following Structures or portions of Structures are permitted to encroach into the Setbacks subject to the limitations in the tables below. No portion of a Structure that encroaches into the Setbacks shall extend into a required Setback beyond the maximum Setback encroachment distance specified in the tables below, as measured perpendicular to the respective Zone Lot line. Where more than one Setback encroachment is allowed for the same Structure or portion of a Structure, the permitted Setback encroachment distances shall not be cumulative. See "Height Exceptions" for encroachments related to Upper Story Setbacks.

#### 1. Architectural Elements

To allow for minor elements which add to the architectural character of buildings, while maintaining an open and unobstructed setback.

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Rooftop and/or Second Story Decks, above grade stairways equal to or less than 4 feet in width, and landings equal to or less than 16 square feet in area.  • All sides shall be at least 50% open except for any side abutting a building facade or fire wall.  *Exception applies whenonly to a the Rear Zone Lot Line abutsting an Alley or Street.  Note: Added this language to match changes to setbacks noted in the building form table for DADU, referencing a street at the rear. If that's not the right thing to do, please comment here.	All G- Zone Districts	Detached Accessory Dwelling Unit	Not allowed	5'	Not allowed	5**
Intent: To allow for second story exterior building entrances and an outdoor space allowance for detached ADU uses.	Setback Alle	Encroachm	den kroto	Side setback.	PRIMARY STREET  to Scale. Illustrative	Only.

	•					
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Belt Courses, sills, lintels, pilasters, pediments, cornices	All G- Zone Districts	All build- ing forms	1.5' Cornices only: 3'	1.5' Cornices only: 3'	1.5' Cornices only: 3'; if setback is less than 5': 2'	1.5' Cornices only: 5'
Intent: To allow common, minor decorative elements which are integral to a building.		Primary Street Setback  From Providence Setback	Pilaster Picroachment	Lintel	Cornice	
Illustrative only		PRIMARY STREE	E Seguina	SIDEST	EET Allowed Encroachment Encroachment Vot to Scale. Illustration	ve Only.

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Brick and stone veneers above Finished Grade for re-siding an existing structure only	All G- Zone Districts	All build- ing forms	6"	6"	6"	6"
Intent: To allow for re-siding of existing structures which may not meet a required minimum setback or the re-siding of the structure would result in not meeting the required minimum setback.						
		nary street irback	Encroachment	ethad	× /	STREET
		PRIMARY STREET			Allowed Allowed Encroachment Encroachment Not to Scale. Illustra	tive Only.
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Canopies providing cover to an entrance: •Shall be no more than 8' maximum in horizontal width; •Shall be open on three sides; •May include an at-grade landing.	All G-RH Zone Districts	All build- ing forms	3′	3′	3'; if setback is less than 5': 2' and at no point closer than 2' to a Zone Lot line.	Not allowed
Intent: To provide for covering over an entrance to protect from weather. Unlike the Unenclosed Porch encroachment, canopy is allowed in Side Interior Setback.			/		Side Set	back
	Primary St. Setback				SIDE STREE	
Illustrative only	Encroachmen	ot STREET	owed himen	Fuctor		ive Only.


	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Canopies providing cover to an entrance:  •The width shall be no greater than 25% of the width of the face of the building or	All G- Zone Districts, except	Town House	Any distance	Any distance	3' and at no point closer than 7.5' to the Zone Lot line	Not allowed
20', whichever is less; and • Shall be open on three sides.	G-RH	All others	Any distance	Any distance	Not allowed	Not allowed
Intent: Provide protection from the weather for pedestrians entering the building and define street pedestrian entrances to the building.	A P	SIMARY STREET	Permitte Encroach	Pent Eroo	SID	ive Only.
Illustrative only		l				
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Gutters, Downspouts and Roof Overhangs	All G- Zone Districts	All build- ing forms	3′	3′	3'; if setback is less than 5': 2'	5′
Intent: To allow features of structures intended to repel weather			$R_{e_{af}}$ $S_{e}$	944	hack	
Illustrative only	Primary St. Setback	ARYSTREET		owed schment	Side Sethack  Side  Side	sethack

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Unenclosed Porches, Decks, Patios, Exterior Balconies, Stoops, and above-grade stairways at the Street Level:  • May be covered;  • All sides shall be at least 50% open except for any side abutting a building facade or fire wall.	All G- Zone Districts	Town House	8' and minimum of 1' between right-of- way and first riser of above- grade stairway	5' and minimum of 1' between right-of- way and first riser of above-grade stairway	Patios: Maximum of 5' wide, Any distance  All Others: Not Allowed 5' and at no point closer than 5' to the Side Interior Zone Lot- line, except Side Interior setback encroachment not allowed for multi-Story fea- tures and features not at Street Level	Patios: Any Distance All Others: 5'
		All Others	8' and minimum of 1' between right-of- way and first riser of above- grade stairway	5' and minimum of 1' between right-of- way and first riser of above-grade stairway	Patios: Maximum of 5' wide, Any distance All Others: Not allowed	Patios: Any Distance All Others: 5'
Intent: To promote elements which provide for street activation and human scale.						
	Primary s Setback	ireer (			Rear Seiback	owed ment
Illustrative only	PRIM	VARYSTREET		Allowed	Not to Scale. Illustrati	(O <sup>o</sup>

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR		
Projecting Windows:  • Shall be a minimum of 1.5' above finished floor;		<del>Town</del> House	<del>1.5'</del>	<del>1.5′</del>	<del>1.5'</del>	<del>1.5′</del>		
Shall not extend floor to ceiling; and     No individual projection shall be more than 10' in horizontal length at the opening along the face of the building.	All G- Zone Districts	All Building Forms	<del>1.5'</del>	<del>1.5'</del>	Not Allowed	<del>1.5'</del>		
Intent: To allow for improved interior day lighting.	Rear Setback Side Setback							
	Primary Street Setback  Allowed  Annual Maximum  Annual Maximum  Encroachment  Sole Street  Annual Maximum  Annual Maximum  Encroachment  Not to Scale. Illustrative Only.							
Hustrative only		STREET	Encr	Vo ogchure No	ot to Scale. Illustrative	e Only.		
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR		
Shading devices: Projections from Exterior Walls intended to control light entering through windows or doors.  • Horizontal shading devices shall include awnings, horizontal sunshades,	DISTRICTS				Horizontal shading devices: 5'	Horizontal shading devices: 3'	Horizontal shad- ing devices: 3'	Hori- zontal shading devices: 10'
<ul> <li>and other shading devices projecting in a horizontal plane</li> <li>All other shading devices shall include vertical sunshades, vertical screens and combination horizontal/vertical sunshades ("eggcrate" sunshades)</li> <li>Vertical screens and combination horizontal/vertical sunshades ("eggcrate" sunshades) shall be at least 50% open</li> </ul>	All G- Zone Districts	All Building Forms	All other shading devices: 1.5'	All other shading devices: 1.5	All other shading devices: 1.5	All other shading devices: 1.5		
Intent: To allow for elements either integral or attached to a building which control enter-			-					
ing light  Horizontal Sunshade  Awnings	Primary Street Setback			A B B B B B B B B B B B B B B B B B B B	Allowethness.	Sde part Setback		
Vertical Sunshades Vertical Screen Illustrative only		,			Not to Scale. Illustrat	tive Only.		

#### 2. Site Elements

To allow for minor screening and parking elements while maintaining an open and unobstructed setback.

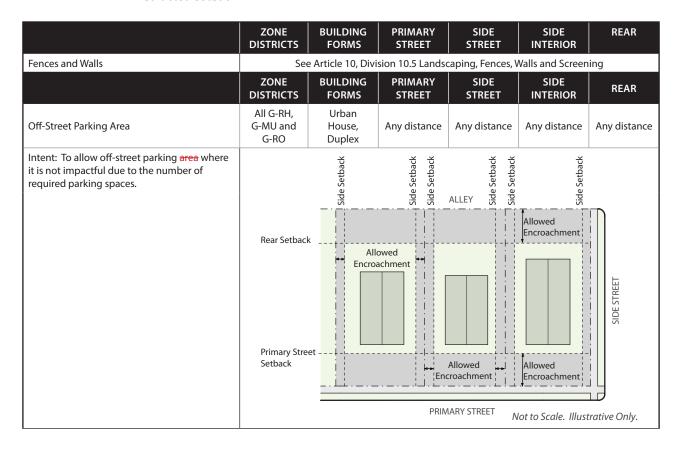


	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
		Garden Court, Row House, and Apartment	Not allowed	Not allowed	Allowed within the rear 35% of the Zone Lot only	Any distance
Off-Street Parking Area  When a Zone Lot contains two or more building forms with different permitted encroachments, the less restrictive standards shall apply. for the entire Zone Lot.	All G-RH, G-MU, G-RO, G-RX, G-MX and G-MS Zone Districts	Town House	Not allowed	Not allowed* (*See excep- tion below)	In the front 65% of the Zone Lot: 5' and at no point closer than 5' to the Zone Lot line. In the rear 35% of the Zone Lot: Any distance	Any distance
		General and Shopfront	Any distance	And distance	Any distance	Any distance
Intent: To restrict off-street parking area where it is impactful due to the number of required parking spaces.	Rear Setba Primary Str Setback	SIDE INTERIOR WOM	pachment !	Side Setback Side Setback	Allowed Encroachment TOWN HOUSE	Front 35% SIDE STREET

<sup>\*</sup>Exception: The minimum 5' of back out space required in Division 10, Section 4 shall be permitted to encroach 2.5' when the encroachment is screened from the Side Street with a Garden Wall and 1 deciduous canopy tree or planting strip.

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Drive or Driveway	All G-RH, G-MU and G-RO Zone Districts	Urban House and Duplex	Any distance	Any distance	Any distance	Any distance
Intent: To allow a Drive or Driveway to access an Off-Street Parking Area.		Setback	Setback	Setback	Street	



Illustrative only

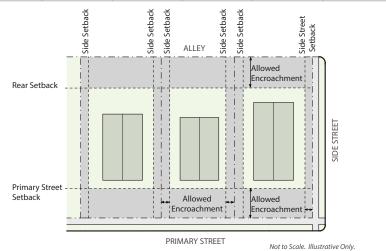


	ZONE DISTRICTS	FORMS	STREET	STREET	SIDE INTERIOR	REAR
ve or Driveway All G-RH,	All C BH	Garden Court, Row House, and Apartment	Any distance	Any distance	Not allowed (*see excep- tion below)	Any distance
When a Zone Lot contains two or more building forms with different permitted encroachments, the less restrictive standards shall apply. for the entire Zone Lot.	G-MU and G-RO Zone Districts	Town House	Not allowed	Not allowed	5' and at no point closer than 5' to the Zone Lot line* (*See excep- tion below)	Any distance

Intent: To allow a Drive or Driveway to access an Off-Street Parking Area, but restrict the location where it is impactful due to proximity to adjacent properties.




Illustrative only

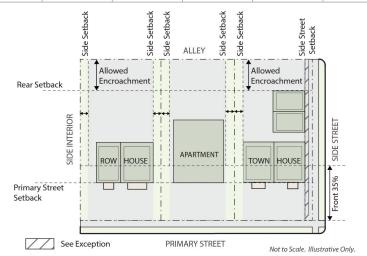

\*Exception: A Drive or Driveway may encroach any distance into a Side Interior setback where:

- •The Side Interior setback Abuts a public Alley;
- •Other public right-of-way, or an easement for public access Abutting a public Alley; or
- •Where a shared access agreement allows the Drive or Driveway to provide shared access to more than one Abutting Zone Lot.

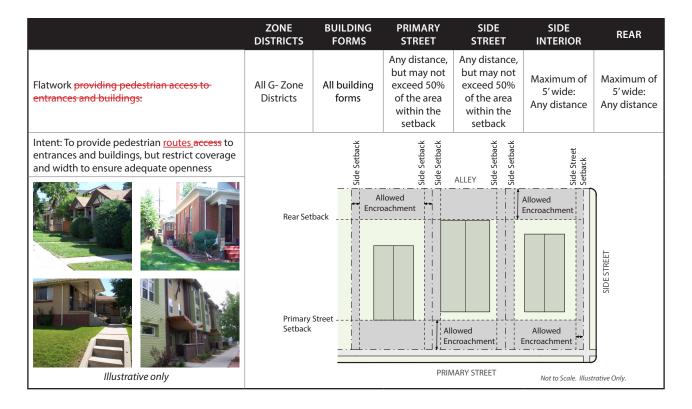


# 3. Service & Utility Elements

To allow for minor service and utility elements while maintaining an open and unobstructed setback.

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Barrier-free access structures providing access to existing buildings, when no alternative location is available.  • Setback encroachments for barrier-free access structures are only allowed for expansions, enlargements, and alterations to existing buildings.	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance
Intent: To provide flexibility in the location of barrier-free access structures, to existing buildings.	Prim				Rear	Setback
CONTACTOR OF THE PARTY OF THE P	Primary St. Setback	reet				
	PRIM	AARY STREET Allowe Encroachm	Side Setback	Allowed	SIDE STREET	
Illustrative only			ent	Not	to Scale. Illustrati	ve Only.

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Basketball goals on a fixed post	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance
	Primary Street Setback	RV STREET	Allowed ment	SIDE STREET EN	esethack side se sulla side se sulla se	oved ment
		· 		Not	to Scale. Illustrat	ive Only.
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Bomb shelter or fallout shelter entrances not more than 2-feet above grade; Bomb shelter or fallout shelter vents not more than 3-feet above grade	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance
Intent: To allow for functional siting.						
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Existing €chimneys originally designed and constructed to enclose fireboxes, smoke chambers, and flues serving wood-burning fireplaces and not exceeding 6-feet in width	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance
Intent: To allow for functional siting.						
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Enclosed structure that is below the original grade and completely underground, of any setback, except as otherwise restricted by this Code	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance

| 6.4-1

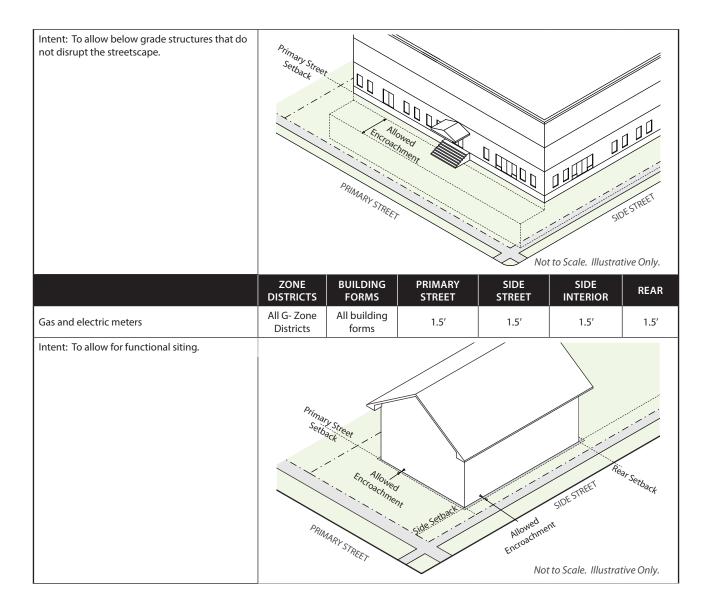


	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Ground mounted air conditioning units or other similar mechanical equipment, except evaporative coolers, provided the following are all met:  • Removed this exception because these can be allowed with the Minor Detached Structure	All G-Zone- Districts	All building- forms	Not allowed	3'; subject to Zon- ing Permit Review with Informational Notice	3'; subject- to Zon- ing Permit- Review with- Informational Notice	3'; subject to Zoning Permit Re- view with Informa- tional Notice

- Does not generate more than 75 decibels of ambient sound according to the manufacturer's specifications and does not exceed the noise standards of Section 36-6 of the DRMC;
- Does not exceed 4' in height or 10 square feet in area per unit;
- Does not exceed 2 units per zone lot;
- $\bullet \textit{Has adequate screening to conceal it from view from adjacent properties and public rights-of way by means of landscaping and/or fences.} \\$ ing; and
  • The location of the unit(s) minimizes the impacts on adjoining properties

<ul> <li>The location of the unit(s) minimizes the imp</li> </ul>	<del>pacts on adjoining properties.</del>
Intent: To allow for functional siting.	Ariman Street  Ariman Street  Anowed Another Street  A
	Not to Scale. Illustrative Only.

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Ground mounted evaporative coolers  ·located behind the front of the primary structure and  ·screened from adjacent properties and public rights-of-way, and  ·not to exceed the noise standards of D.R.M.C. Section 36-6  ·Removed this exception because these can be allowed with the Minor Detached Structure	All G- Zone Districts	All building forms	<del>Not allowed</del>	€	€	<del>Not</del> <del>allowed</del>

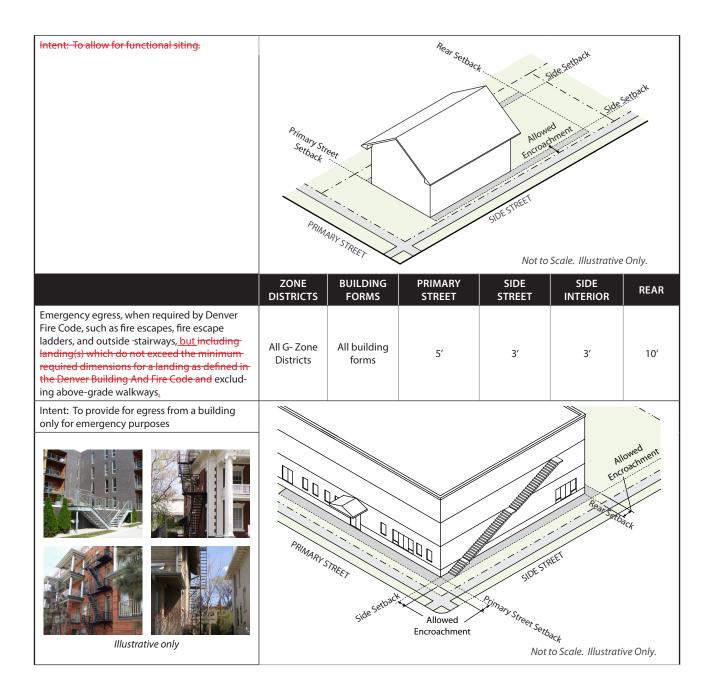


	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Pedestrian Bridge where the encroachment is necessary to complete a connection for a continuous, publicly accessible pedestrian/bicycle route provided the Department of Transportation and Infrastructure ("DOTI") has approved a right-of-way encumbrance.	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance
Intent: To allow for above-grade connections that support continuous publicly accessible pedestrian/bicycle routes.				bis	e Setback	
Illustrative only	Primary Stresets Serback	RV S TREET	Mone	SIDEST	ear serbach Sid	e Sethack
musuative orny			Encros	Not	to Scale. Illustrat	ive Only.

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Retaining structures for window wells and below grade areas, (1) shall not extend more than 6_inches above grade; and (2) shall not exceed 6_feet in width as measured parallel to the exterior walls of the structure served	All G- Zone Districts	All building forms	4'	4'	4'	4'
Intent: To allow for openings to below-grade spaces						
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Retaining structures for window wells and below grade areas for exits, exit discharges, and emergency escape and rescue openings required by the Denver Building and Fire Code,  (1) shall not extend more than 6_inches above finished grade; and  (2) shall not exceed 6-feet in width as measured parallel to the exterior walls of the structure served; and  (3) shall not extend more than exceed 4_feet into the setback in width as measured perpendicular to the exterior walls of the structure served; and  (4) shall not exceed the minimum number of exits or emergency escape and rescue openings required by the Denver Building and Fire Code	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance
Intent: To allow for minimum means of egress components and minimum emergency escape and rescue openings required for life-safety						
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Solar Panel, Flush Mounted building-mounted	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance
Intent: To allow <del>flush mounted</del> solar panels on the roof of existing structures that which may not meet a required minimum setback.			l			
Illustrative only			Mowed	Not to Scale	. Illustrative Only	·.

	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Utility pedestals, transformers or other similar equipment, excluding mechanical equipment: •Shall not exceed 34′ in height.	All G- Zone Districts	All building forms	Any distance	Any distance	Any distance	Any distance
Intent: To allow for functional siting.	Primary Street Setback	RV STREET	Allowed enternance	Allowed Engoach	t to Scale. Illustra	owed convent coachment
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Utility pedestals, transformers or other similar equipment, excluding mechanical equipment: • Greater than 3' in height but not exceeding 8' in height above Finished Grade.	All G-RH, G-MU, G-RO, G-MX, and G-MS Zone Districts	All building forms	Not allowed	Not allowed	Any distance	Any distance
Intent: To allow for functional siting.	Rear Setbac Primary Stre Setback	Allowe Encroachr		FT	sent SiDE STREET	
	ZONE DISTRICTS	BUILDING FORMS	PRIMARY STREET	SIDE STREET	SIDE INTERIOR	REAR
Mailboxes and other similar accessory structures serving a similar utilitarian function, including individual mailbox structures and cluster box units (CBUs) and free-standing bike racks	All G-Zone Districts	All building forms	Any distance	Any distance	Not allowed, unless also within the Pri- mary Street Setback	Not allowed

| 6.4-7

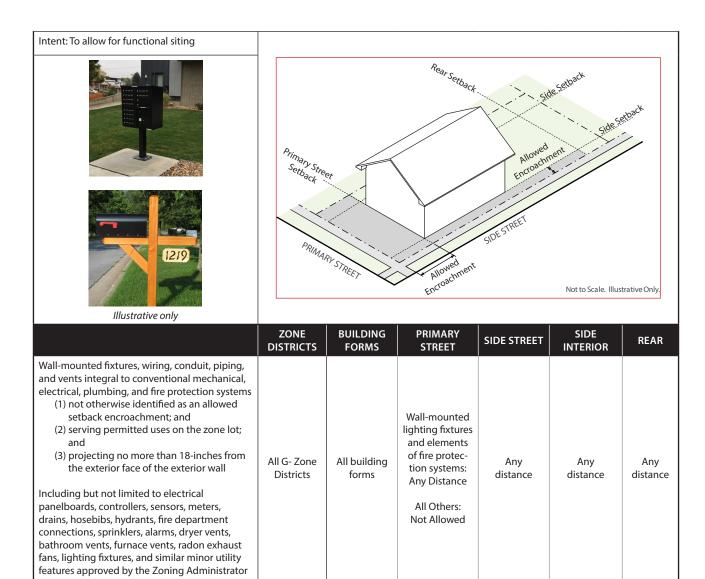

# 6.3.7.5 Building Coverage Exception

#### A. Applicability

Intent: To allow for functional siting.

All G-zone districts where a building coverage standard applies.

#### **B.** Unenclosed Porch Exception

#### 1. Intent

To promote street activation and human scale.

#### 2. Standard

The Building Footprint of a Primary Structure occupied only by portions of an Unenclosed Porch may be excluded from the calculation of Building Coverage up to a maximum of 400 square feet for each dwelling unit if (1) the portions of the Unenclosed Porch are located between the Primary Street zone lot line and the Primary Street-facing façade(s) of the Primary Structure; and (2) the portions of the Unenclosed Porch provide access to a primary use within the structure. A Facade is "Street-facing" when it meets the criteria in Section 13.1.6.5 Determination of "Street-Facing" Building Elements.

#### C. Detached Accessory Dwelling Unit Building Form Exception

#### 1. Intent-

To provide an incentive for accessory dwelling units and promote openness between buildings on a Zone Lot.

#### 2. Standard

Half of the Building Footprint of theany Detached Accessory Dwelling Unit or building form may be excluded from the calculation of Building Coverage up to a maximum of 500 square feet, including any exception for a Detached Garage using Section 6.3.7.5.D, if there is a minimum distance of 15 feet between the closest portions of the Detached Accessory Dwelling Unit building form that are more than 30 inches above grade and the closest portions of the Primary Structure(s) on the zone lot that are more than 30 inches above grade.

#### D. Detached Garage Building Form Exception

#### 1. Intent

To promote openness between buildings on a Zone Lot.

#### 2. Standard

Half of the Building Footprint of the Detached Garage building form may be excluded from the calculation of Building Coverage up to a maximum of 500 square feet, including any exception for a Detached Accessory Dwelling Unit using Section 6.3.7.5.C, if:

- a. A minimum of 80% of the street level Gross Floor Area of the Detached Garage building form is used for vehicle storage and parking; and
- b. There is a minimum distance of 15 feet between the closest portions of the Detached Garage building form that are more than 30 inches above grade and the closest portions of the Primary Structure(s) on the zone lot that are more than 30 inches above grade:

#### 6.3.7.6 Vehicle Access From Alley Required - Exceptions

#### A. No Alley

Where a building form specifies "street access allowed when no Alley present", vehicle access from the street is allowed when a Zone Lot is not bounded by an Alley.

#### **B.** Alley Access Required

Where a building form specifies vehicle access from Alley is required, and the Zone Lot is bounded by an Alley, any newly constructed Driveway, Off-Street Parking Area, Garage, Carport, or other parking facility shall be accessed solely from an Alley, unless the applicant can demonstrate at the time of zoning permit application that an exception stated in this Section 6.3.7.6 applies.

## C. DOTI Approval Required for All Exceptions to Alley Access

The Department of Transportation and Infrastructure ("DOTI") shall approve all requests for an exception to required Alley access under this Section 6.3.7.6.

#### D. General Exceptions

When one or more of the conditions listed in this Section 6.3.7.6.D apply, street access may be used instead of alley access. However, if improvements to any portion of the Alley, including widening and/or repaving, are required by the City at the time of Development due to a change in use or intensity, which improvements resolve one or more conditions for an exception specified in this Section 6.3.7.6.D, then vehicular Alley access shall be required.

1. The Alley is not provided with an all-weather surface of asphalt, asphaltic concrete, concrete, or any equivalent material;

- 2. The Alley is less than 12 feet in width;
- 3. At least 60 percent of the existing Zone Lots on the same Face Block are served by Driveways, Off-Street Parking Areas, Garages, Carports, or other parking facilities accessed from a primary street.
- The Department of Transportation and Infrastructure ("DOTI") prohibits the use of the 4. Alley for vehicular access to the Zone Lot based upon a determination that the Alley cannot safely or operationally accommodate additional vehicular traffic; or
- 5. The Primary Use is within the Civic, Public, and Institutional Use Category and the DRC determines during Site Development Plan review that street access is more consistent with the Comprehensive Plan, or is necessary to ensure safety or vehicle operational needs.

#### E. Special Exception for Pre-Existing Street Access

When the conditions listed in this Section 6.3.7.6.E apply, street access may be used instead of alley access. Vehicular access from the street to an accessory Garage, Carport, or other Off-Street Parking Area was legally established, constructed, or expanded prior to June 25, 2010, and has been Continuously Maintained; and

The Primary Structure containing either a Single-Unit or Two-Unit Dwelling use on the 1. same Zone Lot is not Voluntarily Demolished. In the case of Voluntary Demolition of the Primary Structure, vehicle access must be taken from the Alley unless otherwise allowed by this Section 6.3.7.6.

#### REFERENCE TO OTHER DESIGN STANDARDS SECTION 6.3.8

#### 6.3.8.1 Article 10: General Design Standards

Refer to the following Divisions for other applicable design standards

A. Parking and Loading: Division 10.4

B. Landscaping, Fences, Screening and Walls: Division 10.5

C. Site Grading: Division 10.6

D. Outdoor Lighting: Division 10.7

E. Signs: Division 10.10



# **DIVISION 6.4 USES AND REQUIRED MINIMUM PARKING**

## SECTION 6.4.1 APPLICABILITY

- 6.4.1.1 This Division 6.4 sets forth the land uses permitted, the required zoning procedure and the required minimum parking for all the General Urban Neighborhood Context zone districts.
- 6.4.1.2 Uses not listed are prohibited, unless the Zoning Administrator specifically permits the unlisted use according to Section 12.4.6, Code Interpretations and Determination of Unlisted Uses.
- 6.4.1.3 For number of primary and accessory uses allowed per Zone Lot, see Section 1.2.3.5, Number of Structures and Uses Allowed per Zone Lot.

### SECTION 6.4.2 ORGANIZATION - SUMMARY USE AND PARKING TABLE

#### 6.4.2.1 Organized by Primary, Accessory and Temporary Uses

The Use and Parking Table first presents all primary uses, then all accessory uses, and finally all temporary uses. Primary uses are arranged hierarchically within the table by use classification, category of primary uses, and then by specific use type. Accessory uses are organized by whether such use is accessory to a primary residential use or to a primary nonresidential use. Temporary uses are presented alphabetically ordered in the last division of the table.

# 6.4.2.2 Primary Use Classifications, Categories & Specific Use Types

#### A. Primary Use Classifications

All primary land uses in the Use and Parking Table are organized into one of the following five general land use classifications:

- 1. Residential Uses
- 2. Civic, Public & Institutional Uses
- 3. Commercial Sales, Service & Repair Uses
- 4. Industrial, Manufacturing & Wholesale Uses
- 5. Agriculture

#### **B.** Primary Use Categories & Specific Use Types

Primary uses are further organized into use categories and specific use types listed under each general primary land use classification. The Use and Parking Table is organized into the above five general land use classifications, use categories and specific use types.

#### C. Classifications & Categories Are Mutually Exclusive

The general land use classifications and use categories listed in the Use and Parking Table are intended to be mutually exclusive; that is, a use classified into one use category, such as "lodging accommodations," cannot be classified in a different use category, such as "congregate living," unless otherwise expressly allowed by this Code.

#### SECTION 6.4.3 EXPLANATION OF TABLE ABBREVIATIONS

#### 6.4.3.1 General Explanation of Table Cell Entries

In each of the table cells, the entry will indicate first whether use limitations apply to the specific use, and then separated by a hyphen, the type of zoning review required prior to establishment of the use under this Code. For example, as described in more detail below, a cell entry "L-ZPIN" means, first, the use is subject to use limitations (the "L"), and, second, that the use is subject to zoning permit review with information notice (the "ZPIN") prior to its establishment.

## 6.4.3.2 Permitted, Limited, Not Permitted

## A. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations.

#### B. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

#### C. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

# 6.4.3.3 Zoning Procedure

#### A. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

## B. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

#### C. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6, Community Information Meeting.

## D. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

#### E. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

#### 6.4.3.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a Completely Enclosed Structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a Completely Enclosed Structure by including an asterisk "\*" next to the specific use type. For example, the asterisk following the "Telecommunication Tower\*" use type in the tables indicates that a telecommunication tower land use need not be enclosed.

## SECTION 6.4.4 DISTRICT SPECIFIC STANDARDS

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

USE CAT- EGORY	SPECIFIC USE TYPE  • Vehicle Parking Reqmt: #  spaces per unit of measure- ment  • Bicycle Parking Reqmt: #  spaces per unit of measure- ment (% Required Spaces in		G-MU-3	G-MU- 12		- CIW, EI IIV, E		3	APPLICABLE USE LIMITATIONS
	Enclosed Facility / % Required Spaces in Fixed Facility)	G-RH-3	G-MU-5 G-MU-8	G-MU- 20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	
RESIDENTIAL	PRIMARY USE CLASSIFICATION								
	Dwelling, Single Unit •No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.6
l la casa a lal	Dwelling, Two Unit  • Vehicle: 1/unit  • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.6
Household Living	Dwelling, Multi-Unit  •Vehicle: 1/unit  •Bicycle: 1/4 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.6
	Dwelling, Live / Work  • Vehicle: 1/unit  • Bicycle: 1/ 4 units (80/20)	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.2.4; §11.2.6
	Residential Care, Type 1  • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	L/L-ZP	L/L-ZP	L/L-ZP	L/L-ZP	L/L-ZP	L/L-ZP	L/L-ZP	§11.2.7; §11.2.8
	Residential Care, Type 2 • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	L-ZPCIM	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.7; §11.2.9
Residential Care	Residential Care, Type 3 • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	NP	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	§11.2.7; §11.2.10
	Residential Care, Type 4 • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	NP	G-MU-3, -5: NP G-MU-8: L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	§11.2.7; §11.2.11
Congregate Living	All Types • Vehicle: 1/1,000 sf GFA • Bicycle: 1/20,000 sf GFA	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
CIVIC, PUBLIC	& INSTITUTIONAL PRIMARY USE CLA	SSIFICAT	ION						
Pacie I Itilitia	Utility, Major Impact*  • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	§ 11.3.1
Basic Utilities	Utility, Minor Impact*  •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.2

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

USE CAT-	SE = Subject to Zoning Permit With Spe SPECIFIC USE TYPE								APPLICABLE USE
EGORY	Vehicle Parking Reqmt: # spaces per unit of measure- ment     Bicycle Parking Reqmt: # spaces per unit of measure- ment (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)	G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU- 12 G-MU- 20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	LIMITATIONS
	Community Center*  • Vehicle: .5 / 1,000 sf GFA  • Bicycle: 1/ 10,000 sf GFA  (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.3
	Day Care Center  • Vehicle: 1/1,000 sf GFA  • Bicycle: 1/10,000 sf GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Community/ Public Ser- vices	Postal Facility, Neighborhood • Vehicle: 1.875/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (20/80)	P-ZP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Processing Center  • Vehicle: 1/ 1,000 sf GFA  • Bicycle: 1/ 10,000 sf GFA  (20/80)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	
	Public Safety Facility  • Vehicle: 1/ 1,000 sf GFA  • Bicycle: 1/ 10,000 sf GFA  (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§ 11.3.5
	Hospital	NP	NP	NP	NP	NP	NP	NP	
	Correctional Institution	NP	NP	NP	NP	NP	NP	NP	
	Cemetery*	NP	NP	NP	NP	NP	NP	NP	
Cultural/Spe-	Library  • Vehicle: 1/1,000 sf GFA  • Bicycle: 1/10,000 sf GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
cial Purpose/ Public Parks & Open Space	Museum	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	
	City Park*	NP	NP	NP	NP	NP	NP	NP	
	Open Space - Conservation*  •No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Education	Elementary or Secondary School • Vehicle: 1/1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
Education	University or College  • Vehicle: 1/1,000 sf GFA  • Bicycle: 1/10,000 sf GFA  (0/100)	NP	L-ZP	L-ZP	NP	L-ZP	L-ZP	L-ZP	§ 11.3.8; § 11.3.9
Education	Vocational or Professional School • Vehicle: 1/1,000 sf GFA • Bicycle: 1/10,000 sf GFA (0/100)	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.3.8
Public and Religious As- sembly	All Types	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§ 11.3.10

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

ZP	SE = Subject to Zoning Permit with Spe	eciai Excep	tion Review	V VVI	nen no ZP, Z	PCIM, ZPIN, Z	PSE listed = N	NO Zoning Po	ermit required
USE CAT- EGORY	SPECIFIC USE TYPE  • Vehicle Parking Reqmt: # spaces per unit of measurement  • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)  SALES, SERVICES, & REPAIR PRIMARY	G-RH-3		G-MU- 12 G-MU- 20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	APPLICABLE USE LIMITATIONS
COMMENCIAL	SALES, SERVICES, & REPAIR PRIMAR	I USL CLA	CAIL CAIL						6 6 11 04411
Adult Busi- ness	All Types	NP	NP	NP	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.
	Arts, Recreation and Entertainment Services, Indoor • Vehicle - Artist Studio: 0.3/1000 sf GFA • Vehicle - All Others: 1.875/ 1,000 sf GFA • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	L-ZP	P-ZP	P-ZP	P-ZP	§ 11.4.2
Arts, Recreation and Entertainment	Arts, Recreation and Entertainment Services, Outdoor*  • Vehicle: 1.875/1,000 sf GFA  • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZPSE	L-ZPSE	L-ZPSE	§ 11.4.3
	Event Space with Alternate Parking and Loading* • Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	
	Sports and/or Entertainment Arena or Stadium*	NP	NP	NP	NP	NP	NP	NP	
Residential Zor (All Uses Shall I	Be Parked According to the Parking tated in this Use Table for the Specific	L-ZP <del>IN</del>	L-ZP <del>IN</del>	L-ZP <del>IN</del>	L-ZP <del>IN</del>	N	lot Applicable	2	§ 11.4.6
Parking of	Parking, Garage  •No Parking Requirements	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Vehicles	Parking, Surface* •No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	NP	NP	NP	§ 11.4.8
Eating & Drinking Es- tablishments	All Types  • Vehicle - MS only: 2 / 1,000 sf  GFA  • Vehicle: 3.75/ 1,000 sf GFA  • Bicycle: 1/3,000 sf GFA (0/100)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	§ 11.4.9
Lodging Accommoda-	Bed and Breakfast Lodging  • Vehicle: 1/guest room or unit  • Bicycle: 1/ 10,000 sf GFA  (60/40)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
tions	Lodging Accommodations, All Others • Vehicle: 1/ guest room or unit • Bicycle: 1/ 10,000 sf GFA (60/40)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

ZP	SE = Subject to Zoning Permit with Spe	ciai Excep	otion keviev	V VV	ien no zp, z	PCIIVI, ZPIN, Z	P3E listed = I	NO ZONING PE	ermit required
USE CAT- EGORY	SPECIFIC USE TYPE  • Vehicle Parking Reqmt: # spaces per unit of measure- ment  • Bicycle Parking Reqmt: #								APPLICABLE USE LIMITATIONS
	spaces per unit of measure- ment (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)	G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU- 12 G-MU- 20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	
	Dental / Medical Office or Clinic								
Office	•Vehicle: 1.875/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (60/40) Office, All Others	NP	NP	NP	L-ZPIN	L-ZP	L-ZP	L-ZP	§ 11.4.10
	• Vehicle: 1.875/1,000 sf GFA • Bicycle: 1/10,000 sf GFA (60/40)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Animal Sales and Services, House- hold Pets Only • Vehicle: 1.875/1,000 sf GFA • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.4.12
	Animal Sales and Services, All Others	NP	NP	NP	NP	NP	NP	NP	
Retail Sales, Service & Repair (Not Including	Food Sales or Market  • Vehicle: 1.875/1,000 sf GFA  • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZP	P-ZP	P-ZP	§ 11.4.14
	Pawn Shop	NP	NP	NP	NP	NP	NP	NP	
Vehicle or Equipment Sales, Service	Retail Sales, Service & Repair Outdoor*	NP	NP	NP	NP	NP	NP	NP	
& Repair)	Retail Sales, Service & Repair - Fire- arms Sales  • Vehicle: 1.875/1,000 sf GFA  • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	NP	NP	P-ZP	
	Retail Sales, Service & Repair, All Others • Vehicle: 1.875/ 1,000 sf GFA • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	
	Automobile Emissions Inspection Facility  • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	P-ZP	P-ZP	
Vehicle /	Automobile Services, Light  • Vehicle: .5/ 1,000 sf GFA  • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	L-ZP	§ 11.4.18; § 11.4.19
Equipment Sales, Rentals, Service &	Automobile Services, Heavy Vehicle: .5/ 1,000 sf GFA Bicycle: No requirement	NP	NP	NP	NP	NP	NP	L-ZP/ZPSE	§ 11.4.18; § 11.4.20
Repair ,	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer*  • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.4.21
	Heavy Vehicle/ Equipment Sales, Rentals & Service*	NP	NP	NP	NP	NP	NP	NP	

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

	PSE = Subject to Zoning Permit with Spe	ciai excep	otion keviev	V VV	nen no zp, z	PCIM, ZPIN, Z	PSE listed = i	NO ZONING PE	ermit required
USE CAT- EGORY	SPECIFIC USE TYPE  • Vehicle Parking Reqmt: #  spaces per unit of measure- ment  • Bicycle Parking Reqmt: #								APPLICABLE USE LIMITATIONS
	spaces per unit of measure- ment (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)	G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU- 12 G-MU- 20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	
INDUSTRIAL,	MANUFACTURING & WHOLESALE PRI	MARY US	E CLASSIF	ICATION					
	Antennas Not Attached to a Tower* •No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.5.2
Communica	Communication Services  • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	P-ZP	L-ZP/ZPSE	G-MS-3: L-ZP/ZPSE G-MS-5: P-ZP	§ 11.5.1
Communica- tions and Information	Telecommunications Towers* •No Parking Requirements	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	§ 11.5.2
	Telecommunications Tower - Alternative Structure* • No Parking Requirements	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	§ 11.5.2
	Telecommunication Facilities All Others* •No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§ 11.5.2
	Contractors, Special Trade - General  • Vehicle: .5/ 1,000 sf GFA  • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	L-ZP	§ 11.5.3
	Contractors, Special Trade - Heavy/ Contractor Yard*	NP	NP	NP	NP	NP	NP	NP	
Industrial Services	Food Preparation and Sales, Commercial  • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.5.5
	Laboratory, Research, Development and Technological Services	NP	NP	NP	NP	NP	L-ZP	L-ZP	§ 11.5.6
	Service/Repair, Commercial  • Vehicle: .5 / 1,000 sf GFA  • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	L-ZP	§ 11.5.7
Manufac-	Manufacturing, Fabrication & Assembly Custom  • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZPIN	L-ZP	L-ZP	§ 11.5.8
Fioduction	Manufacturing, Fabrication & Assembly General	NP	NP	NP	NP	NP	NP	NP	
	Manufacturing, Fabrication & Assembly Heavy	NP	NP	NP	NP	NP	NP	NP	
Mining &	Oil, Gas Production, Drilling*	NP	NP	NP	NP	NP	NP	NP	
Extraction and Energy	Sand or Gravel Quarry*	NP	NP	NP	NP	NP	NP	NP	
ind Lifergy	Wind Energy Conversion Systems* •No Parking Requirement	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	§ 11.5.13

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

	SE = Subject to Zoning Permit with Spe	ciai Excep	tion Review	V VV	nen no ZP, Z	PCIM, ZPIN, Z	.PSE listea = r	NO Zoning Pe	ermit required
USE CAT- EGORY	SPECIFIC USE TYPE  • Vehicle Parking Reqmt: #  spaces per unit of measure- ment  • Bicycle Parking Reqmt: #								APPLICABLE USE LIMITATIONS
	spaces per unit of measure-			G-MU-					
	ment (% Required Spaces in		G-MU-3	12					
	Enclosed Facility / % Required	C DIL 3	G-MU-5	G-MU-	G-RO-3	G-RX-3 G-RX-5	CMVa	G-MS-3 G-MS-5	
	Spaces in Fixed Facility)	G-RH-3	G-MU-8	20	G-RO-5	G-KX-5	G-MX-3		
	Airport*	NP	NP	NP	NP	NP	NP	NP	
	Helipad, Helistop, Heliport* No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZP	L-ZP	§ 11.5.14
	Railroad Facilities*	NP	NP	NP	NP	NP	NP	NP	
Transporta- tion Facilities	Railway Right-of-Way* No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Terminal, Station or Service Facility for Passenger Transit System • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§ 11.5.16
	Terminal, Freight, Air Courier Services	NP	NP	NP	NP	NP	NP	NP	
	Automobile Parts Recycling Business*	NP	NP	NP	NP	NP	NP	NP	
	Junkyard*	NP	NP	NP	NP	NP	NP	NP	
Waste Related	Recycling Center	NP	NP	NP	NP	NP	NP	NP	
Services	Recycling Collection Station	NP	NP	NP	NP	NP	NP	NP	
	Recycling Plant, Scrap Processor	NP	NP	NP	NP	NP	NP	NP	
	Solid Waste Facility	NP	NP	NP	NP	NP	NP	NP	
	Automobile Towing Service Storage Yard*	NP	NP	NP	NP	NP	NP	NP	
Wholesale, Storage,	Mini-storage Facility  • Vehicle: 0.1 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	NP	§ 11.5.23
Warehouse &	Vehicle Storage, Commercial*	NP	NP	NP	NP	NP	NP	NP	
Distribution	Wholesale Trade or Storage, General	NP	NP	NP	NP	NP	NP	NP	
	Wholesale Trade or Storage, Light  • Vehicle: .5/ 1,000 sf GFA  • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	§ 11.5.26
AGRICULTURE	PRIMARY USE CLASSIFICATION								
	Aquaculture*	NP	NP	NP	NP	NP	NP	NP	
	Garden, Urban* • Vehicle: .5/ 1,000 sf GFA	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.2
Agriculture	Bicycle: No requirement  Husbandry, Animal*	NP	NP	NP	NP	NP	NP	NP	
Agriculture	Husbandry, Plant*	NP	NP	NP	NP	NP	NP	NP	
	Plant Nursery	141	1 41	1.41	141	. 41		141	
	•Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.6.5

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

USE CAT- EGORY	SPECIFIC USE TYPE  • Vehicle Parking Reqmt: # spaces per unit of measure- ment  • Bicycle Parking Reqmt: # spaces per unit of measure- ment (% Required Spaces in Enclosed Facility / % Required		G-MU-3 G-MU-5	G-MU- 12 G-MU-	G-RO-3	G-RX-3		G-MS-3	APPLICABLE USE LIMITATIONS
	Spaces in Fixed Facility)	G-RH-3	G-MU-8	20	G-RO-5	G-RX-5	G-MX-3	G-MS-5	
ACCESSORY T	O PRIMARY RESIDENTIAL USES USE C	LASSIFIC	ATION						
	Unlisted Accessory Uses			L - App	licable to al	l Zone District	:S		§ 11.7
	Accessory Dwelling Unit	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.7, § 11.8.2
Accessory to	Domestic Employee	L	L	L	L	L	L	L	§11.7.1; §11.8.3
Primary Residential Uses	Garden*	L	L	L	L	L	L	L	§ 11.7, § 11.8.4
deritial oses	Keeping of Household Animals*	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	§ 11.7; § 11.8.5
(Parking is Not Required for Accessory	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	L	L	L	L	L	L	§ 11.7; § 10.9
Uses Unless	Kennel or Exercise Run*	L	L	L	L	L	L	L	§ 11.7; § 11.8.6
Specifically Stated in this	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	NP	L-ZP	L-ZP	L-ZP	L-ZP	Not Applic Permitted P		§ 11.7; § 11.8.7
Table or in an	Outdoor Storage, Residential*	L	L	L	L	L	L	L	§11.7; §11.8.8
Applicable Use Limita-	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.7; § 11.8.9
tion)	Short-term Rental	L	L	L	L	L	L	L	§ 11.7; § 11.8.10
	Vehicle Storage, Repair and Mainte- nance*	L	L	L	L	L	L	L	§ 11.7; § 10.9.
	Wind Energy Conversion Systems*	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	Not Applic Permitted P		§ 11.7; § 11.5.13
	Yard or Garage Sales*	L	L	L	L	L	L	L	§ 11.7; § 11.8.11
HOME OCCUP	ATIONS ACCESSORY TO PRIMARY RES	SIDENTIA	L USES US	E CLASSIFI	CATION				
Home Oc- cupations	Child Care Home, Large	<del>L-ZPIN</del> <u>L-ZP</u>	<del>L-ZPIN</del> <u>L-ZP</u>	<del>L-ZPIN</del> <u>L-ZP</u>	<del>L-ZPIN</del> <u>L-ZP</u>	L-ZPIN-L-ZP	<del>L-ZPIN</del> <u>L-ZP</u>	<del>L-ZPIN</del> <u>L-ZP</u>	§ 11.9; § 11.9.3
(Parking is	All Other Types	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.9; § 11.9.4
Not Required for Home Occupations Unless Specifi- cally Stated in this Table or in an Applicable Use Limita- tion)	Unlisted Home Occupations	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§ 11.9; § 11.9.5

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

ZF	PSE = Subject to Zoning Permit with Spe	ecial Excep	otion Reviev	w Wh	nen no ZP, Z	PCIM, ZPIN, Z	PSE listed = N	No Zoning Pe	ermit required
USE CAT- EGORY	SPECIFIC USE TYPE  Vehicle Parking Reqmt: # spaces per unit of measurement Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)	G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU- 12 G-MU- 20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	APPLICABLE USE LIMITATIONS
ACCESSORY T	O PRIMARY NONRESIDENTIAL USES (	JSE CLAS	SIFICATION	١					
	Unlisted Accessory Uses			L - App	licable to al	I Zone Distric	ts		§ 11.7; § 11.10.1
	Amusement Devices Accessory to Eating/Drinking Establishments, Col- lege/University and Theater Uses	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.7; § 11.10.2
	Automobile Rental Services Accessory to Certain Retail Uses*	NP	NP	NP	NP	Not Applicable - See Permitted Primary Uses	Not Applicable - See Permitted Primary Uses	Not Applicable - See Permitted Primary Uses	§ 11.7; § 11.10.3
	Book or gift store; media recording and production facilities accessory to public libraries, museums, places of religious assembly, colleges or universities	L	L	L	L		icable - See P Primary Uses		§11.7; §11.10.4
	Car Wash Bay Accessory to Automobile Services or Hotel Uses	NP	NP	NP	NP	L-ZP	L-ZP	NP	§ 11.7; § 11.10.5
	College Accessory to a Place for Religious Assembly	L	Not Applic Permitted Us	d Primary	L		icable - See P Primary Uses	ermitted	§ 11.7; § 11.10.6
Accessory	Conference Facilities Accessory to Hotel Use	NP	NP	NP	NP	L	L	L	§ 11.7; § 11.10.7
to Primary Nonresiden- tial Uses	Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses*	NP	NP	NP	NP	NP	L-ZP	L-ZP	§ 11.7; § 11.10.8
(Parking is	Emergency Vehicle Access Point	NP	NP	NP	NP	NP	NP	NP	
Not Required for Accessory	Garden*	L	L	L	L	L	L	L	§11.7; §11.10.10
Uses Unless Specifically	Keeping of Animals	L/L-ZPIN		L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZP/ L-ZPIN	L/L-ZP/ L-ZPIN	§11.7; § 11.10.11
Stated in this	Limited Commercial Sales, Services	L	L	L	L	L	L	L	§11.7; §11.10.12
Table or in an Applicable Use Limita- tion)	Nonresidential Uses in Existing Business Structures In Residential Zones - Accessory Uses	L	L	L	L	Not Applicable - See Permitted Primary Uses	Not App	olicable	§11.4.6
	Occasional Sales, Services Accessory to <u>Primary</u> Places of Religious Assembly <u>or Primary Uses</u> <u>Operated by Nonprofit Organiza-</u> <u>tions</u> *	L	L	L	L	L	L	L	§11.7; §11.10.13
	Outdoor Gathering Area*	L/ L-ZP/ L-ZPIN	L/ L-ZP/ L-ZPIN	L/ L-ZP/ L-ZPIN	L/ L-ZP/ L-ZPIN	L/L-ZP/L- ZPIN	L/L-ZP/L- ZPIN	L/L-ZP/L- ZPIN	§11.7; §11.10.14
	Outdoor Entertainment Accessory to an Eating/Drinking Establishment Use*	NP	NP	NP	NP	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	§11.7; §11.10.15
	Outdoor Retail Sale and Display*	NP	NP	NP	NP	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	§11.7; §11.10.16
	Outdoor Storage, General*	NP NP	NP ND	NP ND	NP ND	NP ND	NP	NP	811 7.811 10 10
F	Outdoor Storage, Limited* Rental or Sales of Adult Material Accessory to a Permitted Bookstore Retail Sales Use	NP NP	NP NP	NP NP	NP NP	NP L	L	L	§11.7; §11.10.18 §11.7; §11.10.19
	Retail Food Establishment, Mobile (Food Truck)*	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	§11.7; §11.10.20

KEY: \* = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPCIM = Subject to Zoning Permit Review with Community Information Meeting ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPCIM, ZPIN, ZPSE listed = No Zoning Permit required

USE CAT- EGORY	SPECIFIC USE TYPE  • Vehicle Parking Reqmt: # spaces per unit of measure- ment  • Bicycle Parking Reqmt: # spaces per unit of measure- ment (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)	G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU- 12 G-MU- 20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	APPLICABLE USE LIMITATIONS
TEMPORARY U	JSE CLASSIFICATION								
	Unlisted Temporary Uses			L- Appl	icable to all	Zone District			§ 11.11.1
	Ambulance Service - Temporary	NP	L-ZP	L-ZP	L-ZP	L-ZP	Not Applic Permitted P		§ 11.11.2
	Amusement / Entertainment - Temporary*	NP	NP	NP	NP	NP	NP	NP	
	Bazaar, Carnival, Circus or Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.11.4
	Building or yard for construction materials*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.11.5
Temporary Uses	Concrete, Asphalt, and Rock Crushing Facility*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.11.6
(Parking is	Fence for Demolition or Construction Work	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.11.7
Not Required for Temporary	Health Care Center	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§ 11.11.8
Uses Unless Specifically	Noncommercial Concrete Batching Plant*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.11.9
Stated in this Table or in an	Outdoor Retail Sales - Pedestrian / Transit Mall*	NP	NP	NP	NP	NP	NP	NP	
Applicable	Outdoor Retail Sales*	NP	NP	NP	NP	L-ZP	L-ZP	NP	§ 11.11.11
Use Limita-	Outdoor Sales, Seasonal*	NP	NP	NP	NP	L-ZPIN	L-ZP	L-ZP	§ 11.11.12
tions)	Parking Lot Designated for a Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.11.13
	Retail Food Establishment, Mobile (Food Truck)*	NP	NP	NP	NP	<u>L/</u> L-ZP	<u>L/</u> L-ZP	NP	§ 11.11.14
	Temporary Construction Office	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.11.15
	Temporary Office - Real Estate Sales	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.11.16
	Temporary Managed Community*	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	§ 11.11.17
	Tent for Religious Services	NP	NP	NP	NP	NP	NP	NP	