



Denver Zoning Code Text Amendment #7

GROUP LIVING TEXT AMENDMENT

PLANNING BOARD DRAFT - 8/12/20

This document contains a draft of proposed text amendment to overhaul the Zoning Code's regulations for residential uses. Key changes include updates to the way the code regulates households, consolidation of all Residential Care uses into a single system regulated by size, rather than by population served, and addition of a new Congregate Living category that allows for the evolution of residential uses that are not in conventional dwelling units. City and community leaders have requested these amendments to modernize the code, update regulations that have not kept pace with how Denver residents live, and remove regulations that exclude populations or preclude the establishment of needed residential uses and facilities. These amendments are the culmination of a two-year process, during which the project team worked closely with a diverse advisory committee of people whose occupational or lived experience highlighted issues with the current code. Additional information, including a slide deck summarizing the changes proposed and a set of frequently asked questions and answers, can be viewed and downloaded on the Group Living project webpage: www.denvergov.org/groupliving. A short slide deck summarizing this project and the key changes it would implement in the DZC can be viewed here.

This review draft is organized in the same order in which the pages and sections appear in the Zoning Code. The first section contains use tables that show permitted zone districts and required parking and review processes for Household, Residential Care and Congregate Living uses in each Neighborhood Context of the Zoning Code, followed by proposed changes related to parking in Article 10. These sections are followed by proposed amendments to Article 11 to add new use definitions and limitations; and finally updates to Article 12 related to the required Community Information Meeting and administration of residential uses. The Planning Board Draft reflects corrections and minor updates to the Public Review Draft, which was published on July 17, 2020.

Public Review Draft Document Conventions

- Text in red underline is proposed new language.
- Text in ~~red strikethrough~~ is proposed deleted language.
- Text in ~~blue strikethrough~~ is being moved from one section/location to another.
- Text in ~~blue, no strikethrough~~, has been moved from another section/location.
- Only pages with changes relevant to this text amendment are included in the review file. You may wish to look at other sections for additional context. You may read or download the full Denver Zoning Code at [this link](#).
- While efforts are made to ensure document quality, cross-referenced section numbers, figure numbers, page numbers, and amendment numbers may appear incorrect since both new and old text appears in a review draft. These will be corrected in the final, "clean" version of the text amendment that is filed for adoption by City Council.
- Additionally, please note that coordination will continue throughout the process to ensure constancy of approach and administration with other ongoing text amendments.

Please send any questions or comments to Andrew Webb at andrew.webb@denvergov.org

WRITTEN COMMENTS WILL BE PROVIDED TO THE PLANNING BOARD AS FOLLOWS:

Written comments received by 5 p.m. 9 days prior to the Planning Board Public Hearing will be attached to the staff report that is provided to the Board a week prior to the hearing. Written comments received after that time and prior to 12 p.m. (noon) on the day before the Hearing will be provided to the board as a separate file on the day of the hearing. Written comments received after 12 p.m. (noon) on the day before the Hearing will not be distributed to the Board; to ensure these comments are considered by the Board, please submit them to the Board during the Hearing.



ARTICLE 3. SUBURBAN (S-) NEIGHBORHOOD CONTEXT



SUBURBAN HOUSE

HEIGHT		S-SU-A	S-SU-D	S-SU-Fx S-SU-F S-SU-F1	S-SU-Ix S-SU-I	S-RH-2.5	S-MU-3, -5, -8, -12, -20				
A	Stories (max)	2.5	2.5	2.5	3	2.5	3				
A	Feet (max)	30'	30'	30'	30'	30'	32'				
	Feet, permitted height increase (max)	1' for every 5' increase in lot width over 50' up to a maximum height of 35'									
B	Bulk Plane Vertical Height at Side Interior and Side Street Zone Lot Line	10'	10'	10'	10'	10'	na				
	Bulk Plane Slope from Side Interior and Side Street Zone Lot Line	45°	45°	45°	45°	45°	na				
SITING		S-SU-A	S-SU-D	S-SU-Fx S-SU-F S-SU-F1	S-SU-Ix S-SU-I	S-RH-2.5	S-MU-3, -5, -8, -12, -20				
ZONE LOT		3,000 sf	6,000 sf	8,500 sf	12,000 sf	6,000 sf	6,000 sf				
C	Zone Lot Width (min)	25'	50'	62.5'	62.5'	50'	50'				
SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH											
		25' or Less		Greater than 25' and less than 62'		62' or Greater					
D	Primary Street, block sensitive setback required	na		yes		yes					
D	Primary Street, where block sensitive setback does not apply (min)	15'		20'		20'					
E	Side Street (min)	3'		5'		5'					
F	Side Interior (min)	3'		5'		7.5'					
G	Rear, alley/no alley (min)	12'/20'		12'/20'		12'/20'					
	Building Coverage per Zone Lot, including all accessory structures (max)	50%		50%		50%					
PARKING BY ZONE LOT WIDTH											
	Parking and Drive Lot Coverage in Primary Street Setback (max)	2 Spaces and 320 sf		2 Spaces and 320 sf		33%					
	Vehicle Access	From Alley; or Street access allowed when no Alley present (See Sec. 3.3.7.6)									
H	DETACHED ACCESSORY STRUCTURES	See Sec. 3.3.4									
DESIGN ELEMENTS		S-SU-A	S-SU-D	S-SU-Fx S-SU-F S-SU-F1	S-SU-Ix S-SU-I	S-RH-2.5	S-MU-3, -5, -8, -12, -20				
BUILDING CONFIGURATION											
	Rooftop and/or Second Story Decks	See Section 3.3.5.2									
		(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use. (2) May follow the Detached Garage Building Form for Side Street, Side Interior and Rear setbacks.									
I	Attached Garage Allowed										
	Primary Street-Facing Attached Garage Door Width in first 50% of lot Depth (max)	35% of the entire width of the Primary Street facing facade of the primary structure or 16', whichever is greater									
	Upper Story Stepback, for any portion of building with Low-Slope Roof, above 25': Primary Street (min)	10'	10'	10'	na	10'	na				
STREET LEVEL ACTIVATION											
J	Pedestrian Access, Primary Street	Entry Feature									
USES		All S-SU, -RH, -MU Districts									
		Primary Uses shall be limited to Single Unit Dwelling and permitted Group Living , Congregate Living , Residential Care and Nonresidential uses. See Division 3.4 Uses and Parking.									

DUPLEX

HEIGHT		S-RH-2.5	S-MU-3, -5, -8, -12, -20
A Stories (max)		2.5	3
A Feet (max)		30'	32'
Feet, permitted height increase		1' for every 5' increase in lot width over 50' up to a maximum height of 35'	
B Bulk Plane Vertical Height at Side Interior and Side Street Zone Lot Line		10'	na
Bulk Plane Slope from Side Interior and Side Street Zone Lot Line		45°	na
SITING		S-RH-2.5	S-MU-3, -5, -8, -12, -20
ZONE LOT		S-RH-2.5	S-MU-3, -5, -8, -12, -20
Zone Lot Size (min)		4,500 sf	4,500 sf
C Zone Lot Width (min)		37.5'	37.5'
All S-RH and S-MU Districts			
SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH		61' or Less	Greater than 61'
D Primary Street, block sensitive setback required		yes	yes
D Primary Street, where block sensitive setback does not apply (min)		20'	20'
E Side Street (min)		5'	5'
F Side Interior (min)		5'	5'
G Rear, alley/no alley (min)		12'/20'	12'/20'
Building Coverage per Zone Lot, including all accessory structures (max)		50%	50%
PARKING BY ZONE LOT WIDTH			
Parking and Drive Lot Coverage in Primary Street Setback (max %)		50%	50%
Vehicle Access		From Alley; or Street access allowed when no Alley present (See Sec 3.3.7.6)	
H DETACHED ACCESSORY STRUCTURES		See Sec. 3.3.4	
DESIGN ELEMENTS		S-RH-2.5	S-MU-3, -5, -8, -12, -20
BUILDING CONFIGURATION			
Rooftop and/or Second Story Decks		See Section 3.3.5.2	
Attached Garage Allowed		(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use. (2) May follow the Detached Garage Building Form for Side Street, Side Interior and Rear setbacks.	
I Primary Street-Facing Attached Garage Door Width in first 50% of lot Depth (max)		35% of the entire width of the Primary Street facing facade of the primary structure or 16', whichever is greater	
Upper Story Stepback, for any portion of building with Low-Slope Roof, above 25': Primary Street (min)		10'	na
STREET LEVEL ACTIVATION			
J Pedestrian Access, Primary Street		Entry Feature	
USES		All S-RH and S-MU Districts	
Primary Uses shall be limited to Two Unit Dwelling and permitted Group Living , Congregate Living , Residential Care and Nonresidential uses.		See Division 3.4 Uses and Parking	

APARTMENT

HEIGHT	S-MU-3	S-MU-5	S-MU-8	S-MU-12	S-MU-20
A Stories (max)	3	5	8	12	20
A Feet (max)	40'	65'	100'	140'	230'
Feet, within 175' of Protected District (max)	na	na	75'	75'	75'
SITING	S-MU-3	S-MU-5	S-MU-8	S-MU-12	S-MU-20
ZONE LOT					
Zone Lot Size (min)	6,000 sf	6,000 sf	6,000 sf	6,000 sf	6,000 sf
Zone Lot Width (min)	50'	50'	50'	50'	50'
Building Coverage per Zone Lot, including all accessory structures (max)	na	na	na	70%	70%
REQUIRED BUILD-TO					
B Primary Street (min% within min/max)	50% 0'/80'	50% 0'/80'	50% 0'/80'	50% 0'/80'	50% 0'/80'
SETBACKS					
C Primary Street (min)	10'	10'	10'	10'	10'
D Side Street (min)	5'	5'	5'	5'	5'
E Side Interior (min)	7.5'	7.5'	7.5'	7.5'	7.5'
Side Interior adjacent to Protected District (min)	10'	10'	10'	10'	10'
F Rear, alley/no alley (min)	10'/20'	10'/20'	10'/20'	10'/20'	10'/20'
PARKING					
Surface Parking between building and Primary Street/Side Street				Allowed/Allowed	
Vehicle Access, 3 or more side-by-side dwelling units in one structure			From Alley; or Street access allowed when no Alley present (Sec. 3.3.7.6)		
Vehicle Access, all other permitted uses				Access determined at Site Development Plan Review	

DESIGN ELEMENTS	S-MU-3	S-MU-5	S-MU-8	S-MU-12	S-MU-20
BUILDING CONFIGURATION					
Primary Street-Facing Attached Garage Door Width (max per structure)	20'	20'	20'	20'	20'
H Upper Story Setback Above 40', Side Interior	na	15'	na	na	na
Upper Story Setback Above 51', Side Interior	na	na	15'	15'	15'
I Upper Story Setback Above 75', Rear, alley/Rear, no alley and Side Interior	na	na	20'/30'	20'/30'	20'/30'
J Upper Story Setback above 27', adjacent to Protected District: Side Interior (min)	25'	25'	25'	25'	25'
K Upper Story Setback Above 40', adjacent to Protected District: Rear, alley/no alley	na	30'/40'	30'/40'	30'/40'	30'/40'
Upper Story Setback above 51', adjacent to Protected District: Side Interior (min)	na	40'	40'	40'	40'
STREET LEVEL ACTIVATION					
L Transparency, Primary Street (min)	30%	30%	30%	30%	30%
M Transparency, Side Street (min)	25%	25%	25%	25%	25%
N Pedestrian Access, Primary Street			Pedestrian Connection		
USES	All S-MU				
Primary Uses shall be limited to Multi Unit Dwelling and permitted Group Living, Congregate Living, Residential Care and Nonresidential uses. See Division 3.4 Uses and Parking					

See Sections 3.3.5 - 3.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

3.4.3.2 Permitted, Limited, Not Permitted

A. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations.

B. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

C. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

3.4.3.3 Zoning Procedure

A. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

B. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

C. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting

D. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

E. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

3.4.3.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type. For

SECTION 3.4.4 DISTRICT SPECIFIC STANDARDS

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	S-SU-Fx S-SU-Ix	S-SU-A S-SU-D S-SU-F S-SU-F1	S-RH-2.5	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x S-MX-2	S-MX-2 S-MX-12 S-MX-12A	S-MX-3 S-MX-3A S-MX-5 S-MX-5A S-MX-8 S-MX-8A S-MX-12 S-MS-3 S-MS-5	APPLICABLE USE LIMITATIONS
--------------	---	--------------------	---------------------------------------	----------	--	--------------------	------------------	-------------------	-------------------------------	--	----------------------------

RESIDENTIAL PRIMARY USE CLASSIFICATION

Household Living	Dwelling, Single Unit • Vehicle: <u>5 or fewer adults</u> : No Parking Requirements. • <u>Vehicle: 6 or more adults: 2/unit</u> • Bicycle: No Requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.6	
	Dwelling, Two Unit • Vehicle: 1.25/unit • MS only: 1/unit • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.2; §11.2.6	
	Dwelling, Multi-Unit • Vehicle - MS only: 1/unit • Vehicle: 1.25/unit • Bicycle: 1/ 5 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.3; §11.2.6	
	Dwelling, Live / Work • Vehicle - MS only: 1/unit • Vehicle: 1.25/unit • Bicycle: 1/ 5 units (80/20)	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.4; §11.2.6	
Residential Care	<u>Residential Care, Type 1</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: No requirement</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>§11.2.7; §11.2.8</u>	
	<u>Residential Care, Type 2</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: No requirement</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>§11.2.7; §11.2.9</u>	
	<u>Residential Care, Type 3</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: No requirement</u>	<u>NP</u>	<u>NP</u>	<u>NP</u>	<u>S-MU-3, -5: NP S-MU-8, -12, -20: L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>NP</u>	<u>NP</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>§11.2.7; §11.2.10</u>
	<u>Residential Care, Type 4</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: No requirement</u>	<u>NP</u>	<u>NP</u>	<u>NP</u>	<u>S-MU-3, -5: NP S-MU-8, -12, -20: L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>NP</u>	<u>NP</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>§11.2.7; §11.2.11</u>
Congregate Living	<u>All Types</u> • <u>Vehicle: 1/1,000 sf GFA</u> • <u>Bicycle: 1/20,000 sf GFA</u>	<u>NP</u>	<u>NP</u>	<u>NP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>		

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations

NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)													APPLICABLE USE LIMITATIONS S-MX-3 S-MX-3A S-MX-5 S-MX-5A S-MX-8 S-MX-8A S-MX-12 S-MX-12A S-MS-3 S-MS-5
		S-SU-Fx S-SU-Ix	S-SU-A S-SU-D S-SU-F S-SU-F1 S-RH-2.5	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x	S-MX-2 S-MX-2A	S-MX-2 S-MX-2A	S-MX-2 S-MX-2A	S-MX-2 S-MX-2A	S-MX-2 S-MX-2A	S-MX-2 S-MX-2A	
Group Living	Assisted Living Facility • Vehicle: .75/unit • Bicycle: No requirement	L-ZPIN	L-ZPIN	P-ZPIN	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§11.2.6; §11.2.7
	Community Corrections Facility	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Nursing Home, Hospice • Vehicle: .75/unit • Bicycle: No requirement	NP	NP	NP	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Residence for Older Adults • Vehicle: .75/unit • Bicycle: No requirement	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§11.2.8
	Residential Care Use, Small or Large • Vehicle: .25/unit • Bicycle: No requirement	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.2.9
	Rooming and Boarding House • Vehicle – MS only: 2 / 1,000 sf GFA • Vehicle: 5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	P-ZP	P-ZP	P-ZP	NP	NP	P-ZP	P-ZP			
	Shelter for the Homeless • Vehicle: 5 / 1,000 sf GFA • Bicycle: No requirement	L	L	L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L	L	L-ZPIN/L	L-ZPIN/L			§11.2.11
	Student Housing • Vehicle – MS only: 1 / unit • Vehicle: 1.25 / unit • Bicycle: 1 / 5 units (80/20)	NP	NP	NP	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP			

CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION

Basic Utilities	Utility, Major Impact* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZPSE	§11.3.1											
	Utility, Minor Impact* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZP	§11.3.2											

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLICABLE USE LIMITATIONS S-MX-3 S-MX-3A S-MX-5 S-MX-5A S-MX-8 S-MX-8A S-MX-12 S-MX-12A S-MS-3 S-MS-5
		S-SU-Fx S-SU-Ix	S-SU-F1 S-SU-I	S-RH-2.5	S-SU-A S-SU-D S-SU-F S-SU-20	S-MU-3 S-MU-5 S-MU-8 S-MU-12	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x S-MX-2	S-MX-2A S-MX-2A	S-MS-3 S-MS-5	
Community/ Public Services	Community Center • Vehicle: .5 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.3.3
	Day Care Center • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	L-ZP	L-ZP	P-ZPIN	P-ZP	P-ZP	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	§11.3.4
	Postal Facility, Neighborhood • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 2.5/ 1,000 sf GFA • Bicycle: 1 / 20,000 sf GFA (20/80)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Processing Center • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 20,000 sf GFA (20/80)	NP	NP	NP	NP	P-ZP	P-ZP	NP	NP	P-ZP	P-ZP	
	Public Safety Facility • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§11.3.5
	Hospital	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
Cultural/Special Purpose/Public Parks & Open Space	Correctional Institution	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Cemetery*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Library • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Museum • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	City Park*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Open Space - Conservation* • No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Education	Elementary or Secondary School • Vehicle- High School: 2/1,000 sf GFA • Bicycle - High School: 1 / 20,000 sf GFA (0/100) • Vehicle- All Others: 1/1,000 sf GFA • Bicycle-All Others: 1 / 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.3.8
	University or College • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	NP	NP	NP	L-ZP	L-ZP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§11.3.8; § 11.3.9
	Vocational or Professional School • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.3.8

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations

NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)													APPLICABLE USE LIMITATIONS S-MX-3 S-MX-3A S-MX-5 S-MX-5A S-MX-8 S-MX-8A S-MX-12 S-MX-12A S-MS-3 S-MS-5
		S-SU-A S-SU-D S-SU-F S-SU-Fx S-SU-Ix	S-SU-F1 S-RH-2.5	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x S-MX-2A							
Public and Religious Assembly	All Types • Vehicle: .5/ 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.10

COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION

Adult Business	All Types	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.
Arts, Recreation & Entertainment	Arts, Recreation and Entertainment Services, Indoor • Vehicle - Artist Studio: 0.3/1000 sf GFA • Vehicle - All Others - MS only: 2/1,000 sf GFA • Vehicle - All Others: 2.5/ 1,000 sf GFA • Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	P-ZP	P-ZP	L-ZPIN	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.4.2
	Arts, Recreation and Entertainment Services, Outdoor* • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 2.5/ 1,000 sf GFA • Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZPSE	L-ZP	NP	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	§ 11.4.3
	Event Space with Alternate Parking and Loading* • Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Sports and/or Entertainment Arena or Stadium*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
Nonresidential Uses in Existing Business Structures In Residential Zones (All Uses Shall Be Parked According to the Parking Requirement Stated in this Use Table for the Specific Nonresidential Use)		L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	Not Applicable								§ 11.4.6
Parking of Vehicles	Parking, Garage • No Parking Requirements	NP	NP	NP	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Parking, Surface* • No Parking Requirements	NP	NP	L-ZP	L-ZP	P-ZP	P-ZP	NP	NP	NP	NP	NP	NP	§ 11.4.8
Eating & Drinking Establishments	All Types • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 5/1,000 sf GFA • Bicycle: 1/5,000 sf GFA (0/100)	NP	NP	NP	NP	P-ZP	P-ZP	L-ZPSE	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.4.9
Lodging Accommodations	Bed and Breakfast Lodging • Vehicle: 1/guest room or unit • Bicycle: 1/20,000 sf GFA (60/40)	NP	NP	NP	NP	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)													APPLICABLE USE LIMITATIONS S-MX-3 S-MX-3A S-MX-5 S-MX-5A S-MX-8 S-MX-8A S-MX-12 S-MX-12A S-MS-3 S-MS-5
		S-SU-Fx S-SU-Ix	S-SU-F1 S-SU-I	S-RH-2.5	S-SU-A S-SU-D S-SU-F	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x S-MX-2	S-MX-2A S-MX-2A	S-MS-3 S-MS-5	S-MS-3 S-MS-5		
Lodging Accommodations	Lodging Accommodations, All Others • Vehicle: 1/guest room or unit • Bicycle: 1/20,000 sf GFA (60/40)	NP	NP	NP	NP	P-ZP	P-ZP	NP	NP	P-ZP	P-ZP			
Office	Dental / Medical Office or Clinic • Vehicle: 2/1,000 sf GFA • Bicycle: 1/20,000 sf GFA (60/40)	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.4.10		
	Office, All Others • Vehicle: 2/1,000 sf GFA • Bicycle: 1/20,000 sf GFA (60/40)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP			
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Animal Sales and Services, Household Pets Only • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 2.5/1,000 sf GFA • Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZP	L-ZP	L-ZPIN	L-ZP	L-ZP	L-ZP	§11.4.12; §11.4.13		
	Animal Sales and Services, All Others	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			
	Food Sales or Market • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 2.5/1,000 sf GFA • Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	P-ZP	P-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§11.4.14		
	Pawn Shop	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			
	Retail Sales, Service & Repair -- Outdoor*	NP	NP	NP	NP	NP	L-ZP	L-ZPIN	L-ZPIN	NP	NP	§11.4.11 §11.4.16		
	Retail Sales, Service & Repair - Firearms Sales • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 2.5/1,000 sf GFA • Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	NP	P-ZP	NP	NP	NP	P-ZP			
	Retail Sales, Service & Repair, All Others • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 2.5/1,000 sf GFA • Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	P-ZP	P-ZP	L-ZP/L-ZPIN	L-ZP	P-ZP	P-ZP	§11.4.11		

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)													APPLICABLE USE LIMITATIONS S-MX-3 S-MX-3A S-MX-5 S-MX-5A S-MX-8 S-MX-8A S-MX-12 S-MX-12A S-MS-3 S-MS-5
		S-SU-Fx S-SU-Ix	S-SU-F1 S-SU-I	S-RH-2.5	S-SU-A S-SU-D S-SU-F S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x S-MX-2	S-MX-2 S-MX-2A	S-MX-2 S-MX-2A	S-MS-3 S-MS-5	S-MS-3 S-MS-5		
Vehicle / Equipment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	P-ZP	P-ZP	NP	L-ZP	P-ZP	P-ZP	P-ZP	§11.4.17	
	Automobile Services, Light • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	NP	L-ZPSE	L-ZP	L-ZP	L-ZP	§11.4.18; §11.4.19	
	Automobile Services, Heavy • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP/ZPSE	NP	NP	NP	L-ZP/ZPSE	L-ZP/ZPSE	§11.4.18; §11.4.20	
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer* • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	NP	NP	L-ZP	L-ZP	L-ZP	§11.4.21	
	Heavy Vehicle/ Equipment Sales, Rentals & Service* • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	P-ZPSE	NP	NP	NP	NP	NP		

INDUSTRIAL, MANUFACTURING & WHOLESALE PRIMARY USE CLASSIFICATION

Communications and Information	Antennas Not Attached to a Tower* • No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.5.2
	Communication Services • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	S-CC-3x: L-ZP/ZPSE S-CC-5x: P-ZP	L-ZPSE	NP	L-ZP/ZPSE	S-MX-3, -3A: L-ZP/ZPSE All Others: P-ZP	S-MS-3: L-ZP/ZPSE S-MS-5: P-ZP	S-MS-3: L-ZP/ZPSE S-MS-5: P-ZP	§11.5.1
	Telecommunications Towers* • No Parking Requirements	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	§11.5.2
	Telecommunications Tower - Alternative Structure* • No Parking Requirements	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	§11.5.2
	Telecommunication Facilities - All Others* • No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.5.2
Industrial Services	Contractors, Special Trade - General • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	NP	NP	L-ZP	L-ZP	L-ZP	§11.5.3
	Contractors, Special Trade - Heavy/ Contractor Yard*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)													APPLICABLE USE LIMITATIONS
		S-SU-Fx S-SU-Ix	S-SU-A S-SU-D S-SU-F S-SU-F1	S-RH-2.5	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x	S-MX-2 S-MX-2A	S-MX-12 S-MX-12A	S-MS-3 S-MS-5			
Industrial Services	Food Preparation and Sales, Commercial • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZPIN	L-ZPIN	L-ZP	L-ZP	§ 11.5.5		
	Laboratory, Research, Development and Technological Services • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	NP	NP	L-ZP	L-ZP	§ 11.5.6		
	Service/Repair, Commercial • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	NP	NP	L-ZP	L-ZP	§ 11.5.7		
Manufacturing and Production	Manufacturing, Fabrication & Assembly -- Custom • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.5.8		
	Manufacturing, Fabrication & Assembly -- General • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP/ ZPSE	NP	NP	L-ZP/ZPSE	L-ZP/ ZPSE	§ 11.5.9		
	Manufacturing, Fabrication & Assembly -- Heavy	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			
Mining & Extraction and Energy Producing Systems	Oil, Gas -- Production, Drilling*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			
	Sand or Gravel Quarry*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			
Transportation Facilities	Wind Energy Conversion Systems* • No Parking Requirements	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	§ 11.5.13		
	Airport*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			
Waste Related Services	Helipad, Heliport, Heliport* • No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZP	L-ZPIN	L-ZPIN	L-ZPIN	L-ZP	L-ZP	§ 11.5.14		
	Railroad Facilities* Railway Right-of-Way* • No Parking Requirements	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			
Wholesale, Storage, Warehouse & Distribution	Terminal, Station or Service Facility for Passenger Transit System • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.5.16		
	Terminal, Freight, Air Courier Services	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLICABLE USE LIMITATIONS S-MX-3 S-MX-3A S-MX-5 S-MX-5A S-MX-8 S-MX-8A S-MX-12 S-MX-12A S-MS-3 S-MS-5
		S-SU-A S-SU-Fx S-SU-Ix	S-SU-D S-SU-F S-SU-F1	S-RH-2.5	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x	S-MX-2 S-MX-2A	S-MX-2 S-MX-2A	S-MS-3 S-MS-5	
Wholesale, Storage, Ware- house & Distribution	Vehicle Storage, Commercial* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZPIN	NP	NP	NP	NP	§11.5.24
	Wholesale Trade or Storage, General • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	P-ZPIN	NP	NP	NP	NP	
	Wholesale Trade or Storage, Light • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	NP	NP	L-ZP/ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	§11.5.26

AGRICULTURE PRIMARY USE CLASSIFICATION

Agriculture	Aquaculture*	NP										
	Garden, Urban* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZP	§11.6.2									
	Husbandry, Animal*	NP										
	Husbandry, Plant*	NP										
	Plant Nursery • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.6.4

ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

(Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts										§11.7
	Accessory Dwelling Unit	NP	S-SU-F1 only: L-ZP; All other: NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.7; §11.8.2
	Domestic Employee	L	L	L	L	L	L	L	L	L	L	§11.7; §11.8.3
	Garden*	L	L	L	L	L	L	L	L	L	L	§11.7; §11.8.4
	Keeping of Household Animals*	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	§11.7; §11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	L	L	L	L	L	L	L	L	L	§11.7; §10.9
	Kennel or Exercise Run*	L	L	L	L	L	L	L	L	L	L	§11.7; §11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	NP	NP	NP	L-ZP	Not Applicable - See Permitted Primary Uses						§11.7; §11.8.7
	Outdoor Storage, Residential*	L	L	L	L	L	L	L	L	L	L	§11.7; §11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.7; §11.8.9
	Short-term Rental	L	L	L	L	L	L	L	L	L	L	§11.7; §11.8.10
	Vehicle Storage, Repair and Maintenance*	L	L	L	L	L	L	L	L	L	L	§11.7; §10.9
	Wind Energy Conversion Systems*	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	Not Applicable - See Permitted Primary Uses						§11.8; §11.5.13
	Yard or Garage Sales*	L	L	L	L	L	L	L	L	L	L	§11.8; §11.8.11

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facil- ty /% Required Spaces in Fixed Facility)											APPLICABLE USE LIMITATIONS
		S-SU-A S-SU-D S-SU-F S-SU-Fx S-SU-Ix	S-SU-F1	S-RH-2.5	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x	S-MX-2A	S-MX-12A	S-MS-3 S-MS-5	

HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Home Occupations (Parking is Not Required for Home Occupations Unless Specifically Stated in this Table or in an Applicable Use Limitations)	Adult Care Home	L-ZP	§11.9; §11.9.4.1									
	Animal Care Services	NP	L-ZP	§11.9; §11.9.4.2								
	Artist Studio	NP	L-ZP	§11.9; §11.9.4.3								
	Beauty Shop or Salon	NP	L-ZP	§11.9; §11.9.4.4								
	Child Care Home, Small	L-ZP	§11.9; §11.9.4.5									
	Child Care Home, Large	L-ZPIN	§11.9; §11.9.3									
	Clock and Watch Repair	NP	L-ZP	§11.9; §11.9.4.6								
	Craft Work	NP	L-ZP	§11.9; §11.9.4.7								
	Custom Dress-making, Millinery, Tailoring, Sewing	NP	L-ZP	§11.9; §11.9.4.8								
	Food Preparation	NP	L-ZP	§11.9; §11.9.4.9								
	Foster Family Care	L-ZP	§11.9; §11.9.4.10									
	Fresh Produce and Cottage Foods Sales*	NP	L-ZP	§11.9; §11.9.4.11								
	Laundering and Pressing	NP	L-ZP	§11.9; §11.9.4.12								
	Office, Non-Medical, Non-Dental	L-ZP	§11.9; §11.9.4.13									
	Professional Studio	NP	L-ZP	§11.9; §11.9.4.15								
	Rooming and/or Boarding	NP	L-ZP	§11.9; §11.9.4.16								
	Tutoring Services	NP	L-ZP	§11.9; §11.9.4.17								
	Unlisted Home Occupations	NP	L-ZPIN	§11.9; §11.9.5								

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)													APPLICABLE USE LIMITATIONS S-MX-3 S-MX-3A S-MX-5 S-MX-5A S-MX-8 S-MX-8A S-MX-12 S-MX-12A S-MS-3 S-MS-5
		S-SU-A S-SU-D S-SU-F S-SU-Fx S-SU-Ix	S-SU-F1	S-RH-2.5	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x	S-MX-2 S-MX-2A	S-MX-2 S-MX-12A	S-MS-3 S-MS-5			

ACCESSORY TO PRIMARY NONRESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Non-residential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts										§11.7; §11.10.1
	Amusement Devices Accessory to Eating/Drinking Establishments, College/University and Theater Uses	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.7; §11.10.2
	Automobile Rental Services Accessory to Certain Retail Uses*	NP	NP	NP	NP	L	Not Applicable - See Permitted Primary Uses	NP	NP	Not Applicable - See Permitted Primary Uses	Not Applicable - See Permitted Primary Uses	§11.7; §11.10.3
	Book or gift store; media recording and production facilities accessory to public libraries, museums, places of religious assembly, colleges or universities	L	L	L	L	Not Applicable - See Permitted Primary Uses						§11.7; §11.10.4
	Car Wash Bay Accessory to Automobile Services	NP	NP	NP	NP	L-ZP	L-ZP	NP	NP	L-ZP	NP	§11.7; §11.10.5
	College accessory to a Place for Religious Assembly	L	L	L	Not Applicable - See Permitted Primary Uses		L	Not Applicable - See Permitted Primary Uses			§11.7; §11.10.6	
	Conference Facilities Accessory to Hotel Use	NP	NP	NP	NP	L	L	NP	NP	L	L	§11.7; §11.10.7
	Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses*	NP	NP	NP	NP	L-ZP	L-ZP	NP	L-ZP	L-ZP	L-ZP	§11.7; §11.10.8
	Emergency Vehicle Access Point	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Garden*	L	L	L	L	L	L	L	L	L	L	§11.7; §11.10.10
	Keeping of Animals	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZP/L-ZPIN	§11.7; § 11.10.11
	Nonresidential Uses in Existing Business Structures In Residential Zones - Accessory Uses	L	L	L	L	Not Applicable						§11.7; §11.4.6
	Occasional Sales, Services Accessory to Places of Religious Assembly*	L	L	L	L	L	L	L	L	L	L	§11.7; §11.10.12
	Outdoor Eating and Serving Area Accessory to Eating/Drinking Establishment Use*	NP	NP	NP	NP	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	§11.7; §11.10.13
	Outdoor Entertainment Accessory to an Eating/Drinking Establishment Use*	NP	NP	NP	NP	L-ZPIN/ZPSE	L-ZPIN/ZPSE	NP	NP	L-ZPIN/ZPSE	L-ZPIN/ZPSE	§11.7; §11.10.14
	Outdoor Retail Sale and Display*	NP	NP	NP	NP	L-ZP/ZPSE	L-ZP/ZPSE	NP	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	§11.7; §11.10.15
	Outdoor Storage, General*	NP	NP	NP	NP	L-ZP	L-ZP	NP	NP	L-ZP	NP	
	Outdoor Storage, Limited*	NP	NP	NP	NP	L	L	L	L	L	L	§11.7; §11.10.17
	Rental or Sales of Adult Material Accessory to a Permitted Book-store Retail Sales Use	NP	NP	NP	NP	L	L	L	L	L	L	§11.7; §11.10.18

KEY: * = Need Not be Enclosed **ZPCIM** = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required


USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLICABLE USE LIMITATIONS
		S-SU-A S-SU-D S-SU-F S-SU-Fx S-SU-Ix	S-SU-F1	S-RH-2.5	S-MU-3 S-MU-5 S-MU-8 S-MU-12 S-MU-20	S-CC-3x S-CC-5x	S-CC-3 S-CC-5	S-MX-2x	S-MX-2 S-MX-2A	S-MX-12 S-MX-12A	S-MS-3 S-MS-5	

TEMPORARY USE CLASSIFICATION

Temporary Uses (Parking is Not Required for Temporary Uses Unless Specifically Stated in this Table or in an Applicable Use Limitations)	Unlisted Temporary Uses	L - Applicable to all Zone Districts									§11.11.1	
	Ambulance Service - Temporary	NP	NP	NP	L-ZP	Not Applicable - See Permitted Primary Uses						
	Amusement / Entertainment - Temporary*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	§11.11.2
	Bazaar, Carnival, Circus or Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.4
	Building or yard for construction materials*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.5
	Concrete, Asphalt, and Rock Crushing Facility*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.6
	Fence for Demolition or Construction Work	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.7
	Health Care Center	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§11.11.8
	Noncommercial Concrete Batching Plant*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.9
	Outdoor Retail Sales - Pedestrian / Transit Mall*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Outdoor Retail Sales*	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.11.11
	Outdoor Sales, Seasonal*	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP	L-ZP	§11.11.12
	Parking Lot Designated for a Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.13
	Retail Food Establishment, Mobile*	NP	NP	NP	NP	L-ZP	L-ZP	NP	L-ZP	L-ZP	NP	§11.11.14
	Temporary Construction Office	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.15
	Temporary Office - Real Estate Sales	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.16
	Temporary Tiny Home Village	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	§11.11.17
	Tent for Religious Services	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	



ARTICLE 4. URBAN EDGE (E-) NEIGHBORHOOD CONTEXT

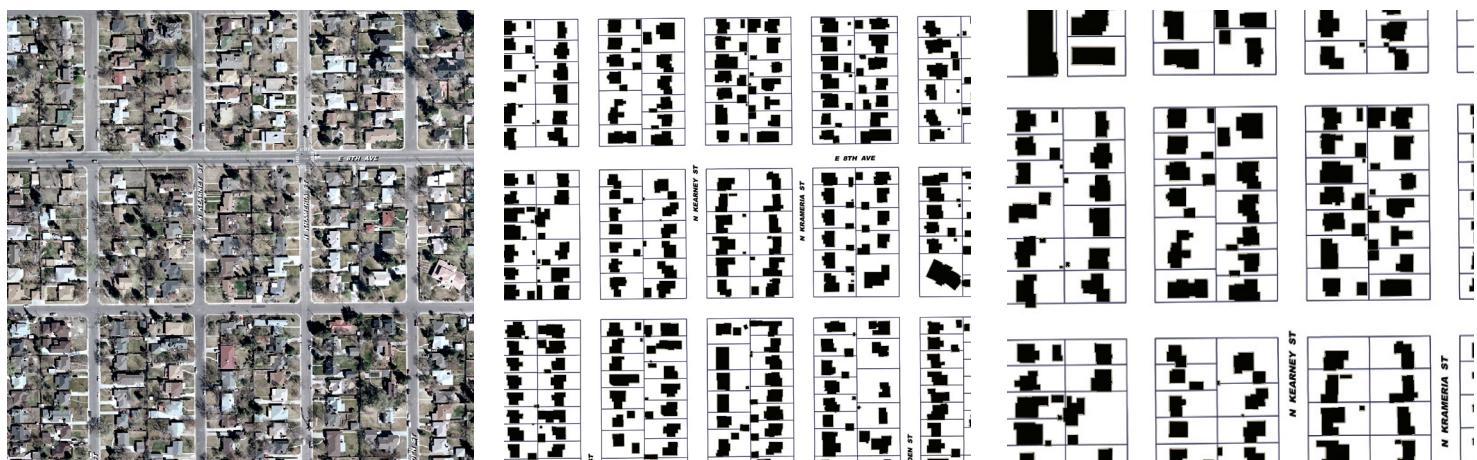

SUBURBAN HOUSE

HEIGHT		E-SU-Dx	E-SU-G	E-RH-2.5
		E-SU-D1x	E-SU-G1	E-MU-2.5
A	Stories (max)	2.5	2.5	2.5
A	Feet (max)	30'	30'	30'
	Feet, permitted height increase	1' for every 5' increase in lot width over 50' up to a maximum height of 35'		
B	Bulk Plane Vertical Height at Side Interior and Side Street Zone Lot Line	10'	10'	10'
	Bulk Plane Slope from Side Interior and Side Street Zone Lot Line	45°	45°	45°
SITING		E-SU-Dx	E-SU-G	E-RH-2.5
ZONE LOT		E-SU-D1x	E-SU-G1	E-MU-2.5
	Zone Lot Size (min)	6,000 sf	9,000 sf	6,000 sf
C	Zone Lot Width (min)	50'	62.5'	50'
SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH				
		61' or Less	Greater than 61'	
D	Primary Street, block sensitive setback required	yes	yes	
D	Primary Street, where block sensitive setback does not apply (min)	20'	20'	
E	Side Street (min)	5'	5'	
F	Side Interior (min)	5'	7.5'	
G	Rear, alley/no alley (min)	12'/20'	12'/20'	
	Building Coverage per Zone Lot, including all accessory structures (max)	37.5%	37.5%	
PARKING BY ZONE LOT WIDTH		61' or Less	62' or Greater	
	Parking and Drive Lot Coverage in Primary Street Setback (max)	33%	33%	
	Vehicle Access	From Alley; or Street access allowed when no Alley present (See Sec. 4.3.7.6)		
H	DETACHED ACCESSORY STRUCTURES	See Sec. 4.3.4		
DESIGN ELEMENTS		All E-SU, -RH, -MU Districts		
BUILDING CONFIGURATION				
	Rooftop and/or Second Story Decks	See Section 4.3.5.2		
		(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use.		
	Attached Garage Allowed	(2) May follow the Detached Garage Building Form for Side Street, Side Interior and Rear setbacks		
I	Primary Street-Facing Attached Garage Door Width in first 50% of lot depth(max)	35% of the entire width of the Primary Street facing facade of the primary structure or 16', whichever is greater		
	Upper Story Stepback, for any portion of building with Low-Slope Roof, above 25': Primary Street (min)	10'		
STREET LEVEL ACTIVATION				
J	Pedestrian Access, Primary Street	Entry Feature		
USES		All E-SU, -RH, -MU Districts		
		Primary Uses shall be limited to Single Unit Dwelling and permitted Group Living Congregate Living , Residential Care and Nonresidential uses.		
		See Division 4.4 Uses and Parking		
See Sections 4.3.5 - 4.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions				

URBAN HOUSE

HEIGHT		E-SU-A	E-SU-B	E-SU-D	E-SU-Dx	E-SU-G	E-RH-2.5			
A/B		Stories, front 65% / rear 35% of zone lot depth (max)	2.5/1	2.5/1	2.5/1	2.5/1	2.5/1	2.5/1		
C/D		Feet, front 65% / rear 35% of zone lot depth (max)	30' / 17'	30' / 17'	30' / 17'	30' / 17'	30' / 17'	30' / 17'		
		Feet, front 65% of zone lot depth, permitted height increase	1' for every 5' increase in lot width over 50' up to a maximum height of 35'							
		Feet, rear 35% of zone lot depth, permitted height increase	1' for every 3' increase in side setback up to a maximum height of 19'							
E		Bulk Plane Vertical Height at Side Interior and Side Street Zone Lot in front 65% / rear 35% of zone lot depth	17' / 10'	17' / 10'	17' / 10'	17' / 10'	17' / 10'	17' / 10'	17' / 10'	
		Bulk Plane Slope from Side Interior and Side Street Zone Lot	45°	45°	45°	45°	45°	45°	45°	
SITING		E-SU-A	E-SU-B	E-SU-D	E-SU-Dx	E-SU-G	E-RH-2.5			
ZONE LOT		E-SU-A	E-SU-B	E-SU-D	E-SU-Dx	E-SU-G	E-TU-B	E-TU-C	E-MU-2.5	
E		Zone Lot Size (min)	3,000 sf	4,500 sf	6,000 sf	6,000 sf	9,000 sf	4,500 sf	5,500 sf	4,500 sf
		Zone Lot Width (min)	25'	35'	50'	50'	62.5'	35'	50'	35'

		All E-SU, TU, RH, MU Districts			
SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH		30' or less	Greater than 30' and up to 40'	Greater than 40' and less than 75'	75' or Greater
F	Primary Street, block sensitive setback required	yes	yes	yes	yes
F	Primary Street, where block sensitive setback does not apply (min)	20'	20'	20'	20'
G	Side Street (min)	3'	5'	5'	7.5'
H	Side Interior (min)	3'	3' min one side/ 10' min combined	5'	10'
I	Rear, alley/no alley (min)	12'/20'	12'/20'	12'/20'	12'/20'
	Building Coverage per Zone Lot, including all accessory structures (max)	50%	37.5%	37.5%	37.5%
PARKING BY ZONE LOT WIDTH					
	Parking and Drive Lot Coverage in Primary Street Setback (max)	2 Spaces and 320 sf	2 Spaces and 320 sf	33%	33%
	Vehicle Access	From Alley; or Street access allowed when no Alley present (See Sec 4.3.7.6)			
J	DETACHED ACCESSORY STRUCTURES	see Sec. 4.3.4			

See Sections 4.3.5 - 4.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

DUPLEX

HEIGHT		E-TU-B	E-TU-C	E-RH-2.5; E-MU-2.5
A/B	Stories, front 65% / rear 35% of zone lot depth (max)	2.5/1	2.5/1	2.5/1
A/B	Feet, front 65% / rear 35% of zone lot depth (max)	30'/17'	30'/17'	30'/17'
	Feet, front 65% of zone lot depth, permitted height increase	1' for every 5' increase in lot width over 50' up to a maximum height of 35'		
	Feet, rear 35% of zone lot depth, permitted height increase	1' for every 3' increase in side setback up to a maximum height of 19'		
C/D	Bulk Plane Vertical Height at Side Interior and Side Street Zone Lot Lines in front 65% / rear 35% of zone lot	17'/10'	17'/10'	17'/10'
	Bulk Plane Slope from Side Interior and Side Street Zone Lot Lines	45°	45°	45°

SITING		E-TU-B	E-TU-C	E-RH-2.5; E-MU-2.5
ZONE LOT				
	Zone Lot Size (min)	4,500 sf	5,500 sf	4,500 sf
E	Zone Lot Width (min)	35'	50'	35'

SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH				
	30' or less	Greater than 30' and up to 40'	Greater than 40' and less than 75'	75' or Greater
F	Primary Street, block sensitive setback required	yes	yes	yes
F	Primary Street, where block sensitive setback does not apply (min)	20'	20'	20'
G	Side Street (min)	3'	5'	5'
H	Side Interior (min)	3'	3' min one side/ 10' min combined	5' 10'
I	Rear, alley/no alley (min)	12'/20'	12'/20'	12'/20'
	Building Coverage per Zone Lot, including all accessory structures (max)	50%	37.5%	37.5%
PARKING BY ZONE LOT WIDTH				
	Parking and Drive Lot Coverage in Primary Street Setback (max)	50%	50%	50%
	Vehicle Access	From Alley; or Street access allowed when no Alley present (See Sec. 4.3.7.6)		
J	DETACHED ACCESSORY STRUCTURES	see Sec. 4.3.4		

DESIGN ELEMENTS		E-TU-B	E-TU-C	E-RH-2.5; E-MU-2.5
BUILDING CONFIGURATION				
	Rooftop and/or Second Story Decks	See Section 4.3.5.2		
	Attached Garage Allowed	(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use. (2) May follow the Detached Garage building form standards for Side Street, Side Interior and Rear setbacks		
	Primary Street Facing Attached Garage Door Width in first 50% of lot depth(max)	35% of the entire width of the front Primary Street facing facade of the dwelling primary structure or 16', whichever is greater		
	Upper Story Stepback, for any portion of building with Low-Slope Roof, above 25': Primary Street (min)	10'	10'	10'
STREET LEVEL ACTIVATION				
K	Pedestrian Access, Primary Street	Entry Feature		
USES		All E-TU, RH, MU Districts		
	Primary Uses shall be limited to Two Unit Dwelling and permitted Group Living , Congregate Living , Residential Care and Nonresidential uses. See Division 4.4 Uses and Parking			

See Sections 4.3.5 - 4.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

ROW HOUSE

HEIGHT		E-RH-2.5
A Stories (max)		see below
A Feet (max)		see below
A Stories, front 65% / rear 35% of zone lot depth (max)		2.5/1
A Feet, front 65% / rear 35% of zone lot depth (max)		30'/19'
Feet, front 65% of zone lot depth, permitted height increase		1' for every 5' increase in lot width over 50' up to a maximum height of 35'
B Side Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)		25'
C Upper Story Setback, for Low-Slope Roof, Above 25': Side, Interior and Side Street		15'

SITING		E-RH-2.5
ZONE LOT		
Zone Lot Size (min)		6,000 sf
D Zone Lot Width (min)		50'
Dwelling Units per Primary Residential Structure (max)		10
SETBACKS		
E Primary Street, block sensitive setback required		yes
E Primary Street, where block sensitive setback does not apply (min)		20'
F Side Street (min)		5'
G Side Interior (min)		5'
Rear, alley/no alley (min)		12'/20'
Rear, adjacent to Protected District, alley/no alley (min)		na
PARKING		
Surface Parking between building and Primary Street/Side Street		Not Allowed/Allowed
Vehicle Access		From Alley; or Street access allowed when no Alley present
DETACHED ACCESSORY STRUCTURES		
		See Sec. 4.3.4

DESIGN ELEMENTS		E-RH-2.5
BUILDING CONFIGURATION		
H Dwelling Units Oriented to the Street		All Dwelling Units shall be Oriented to the Street
Dwelling Unit Configuration		Structure shall only contain Side-by-Side Dwelling Units
I Upper Story Stepback, for any portion of building with Low-Slope Roof, above 25': Primary Street (min)		10'
J Primary Street- Facing Attached Garage Door Width (max per unit)		10'
Rooftop and/or Second Story Decks		See Section 4.3.5.2
Attached Garage Allowed		May follow the Detached Garage building form Side Street, Side Interior and Rear setbacks
STREET LEVEL ACTIVATION		
K Pedestrian Access		Each unit shall have a street-facing Entrance

USES		E-RH-2.5
Primary Uses shall be limited to Multi-Unit Dwelling and permitted Group Living Residential Care and Nonresidential uses.		Primary Uses shall be limited to Multi-Unit Dwelling and permitted Group Living Residential Care and Nonresidential uses.

See Sections 4.3.5 - 4.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

APARTMENT

HEIGHT	E-MU-2.5
A Stories, front 65% / rear 35% of zone lot depth (max)	2/1
A Feet, front 65% / rear 35% of zone lot depth (max)	30'/19'
Feet, front 65% of zone lot depth, permitted height increase	1' for every 5' increase in lot width over 50' up to a maximum height of 35'
Side Wall Plate Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)	25'
Upper Story Setback, for Low-Slope Roof, Above 25': Side Interior and Side Street (min)	15'

SITING	E-MU-2.5
ZONE LOT	
Zone Lot Size (min)	6,000 sf
Zone Lot Size (min)	50'
SETBACKS	
B Primary Street, block sensitive setback required (see Sec. 13.1.2.3)	yes
B Primary Street, where block sensitive setback does not apply (min)	20'
C Side Street (min)	5'
D Side Interior (min)	5'
E Rear, alley/no alley (min)	12'/20'
PARKING	
Surface Parking between building and Primary Street/Side Street	Not Allowed/Allowed
Surface Parking Screening	See Article 10, Division 10.5
Vehicle Access	Access determined at Site Development Plan

DESIGN ELEMENTS	E-MU-2.5
BUILDING CONFIGURATION	
Dwelling Unit Configuration	Structure may contain Side-by-Side Dwelling Units Residential Only Structure: Side-by-Side Dwelling Units shall not exceed 50% of the Structure's GFA
Street facing garage door width per Primary Structure (max)	20'
Upper Story Stepback, for any portion of building with Low-Slope Roof, above 25': Primary Street (min)	10'
Rooftop and/or Second Story Decks	See Section 4.3.5.2
STREET LEVEL ACTIVATION	
G Transparency, Primary Street (min)	40%
H Transparency, Side Street (min)	25%
I Pedestrian Access, Primary Street	Entrance
USES	E-MU-2.5
Primary Uses shall be limited to Multi Unit Dwelling (3+) and permitted Group Living Congregate Living , Residential Care and Nonresidential uses. See Division 4.4 Uses and Parking	

See Sections 4.3.5 - 4.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

4.4.3.2 Permitted, Limited, Not Permitted

A. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations or standards.

B. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

C. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

4.4.3.3 Zoning Procedure

A. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

B. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

C. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

D. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

E. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

4.4.3.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type.

For example, the asterisk following the “Telecommunication Tower*” use type in the tables indicates that a telecommunication tower land use need not be enclosed.

SECTION 4.4.4 DISTRICT SPECIFIC STANDARDS

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice L = Permitted Use with Limitations
 Special Exception Review ZPSE = Subject to Zoning Permit with
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	APPLICABLE USE LIMITATIONS									
RESIDENTIAL PRIMARY USE CLASSIFICATION											
Household Living	Dwelling, Single Unit •Vehicle: 5 or fewer adults: No Parking Requirements. •Vehicle: 6 or more adults: 2/unit •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.2.6
	Dwelling, Two Unit •Vehicle: 1/unit •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.2.2; § 11.2.6
	Dwelling, Multi-Unit •Vehicle: 1/unit •Bicycle: 1/ 5 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.2.3; § 11.2.6
	Dwelling, Live / Work •Vehicle: 1/unit •Bicycle: 1/ 5 units (80/20)	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.2.4; § 11.2.6
Residential Care	Residential Care, Type 1 •Vehicle: .5/1,000 sf GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.2.7; § 11.2.8
	Residential Care, Type 2 •Vehicle: .5/1,000 sf GFA •Bicycle: No requirement	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.2.7; § 11.2.9
	Residential Care, Type 3 •Vehicle: .5/1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	L-ZPCIM	L-ZPCIM	L-ZPCIM	NP	NP	L-ZPCIM	L-ZPCIM
	Residential Care, Type 4 •Vehicle: .5/1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	L-ZPCIM	L-ZPCIM	NP	NP	L-ZPCIM	L-ZPCIM
Congregate Living	All Types •Vehicle: 1/1,000 sf GFA •Bicycle: 1/20,000 sf GFA	NP	NP	E-RH-2.5; NP E-MU-2.5; P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with
Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI- CABLE USE LIMITA- TIONS							
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-SU-G	E-TU-B	E-RH-2.5	E-RX-3	E-CC- 3x	E-CC-3	E-MX- 2x	E-MX- 2A	E-MX- 3A	E-MX- 3	E-MS- 2x	E-MS- 2
Group Living	Assisted Living Facility •Vehicle: .75/unit •Bicycle: No requirement	L-ZPIN	L-ZPIN	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	\$11.2.6- \$11.2.7		
	Community Corrections Facility	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP			
	Nursing Home, Hospice •Vehicle: .75/unit •Bicycle: No requirement	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP				
	Residence for Older Adults •Vehicle: .75/unit •Bicycle: No requirement	L-ZP-	L-ZP-	P-ZP-	P-ZP	P-ZP	P-ZP-	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	\$11.2.8			
	Residential Care Use, Small or Large •Vehicle: .25/unit •Bicycle: No requirement	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	\$11.2.9			
	Rooming and Boarding House •Vehicle - MS only: 2 / 1,000- sf GFA •Vehicle: 4.5 / 1,000- sf GFA •Bicycle: No requirement	NP	NP	E-RH-2.5- NP E-MU-2.5- P-ZP	P-ZP	P-ZP	P-ZP	NP	NP	P-ZP	P-ZP								
	Shelter for the Homeless •Vehicle: 5 / 1,000 sf GFA •Bicycle: No requirement	L	L	L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L	L	L-ZPIN/L	L-ZPIN/L	L	L	L	L	\$11.2.11			
	Student Housing •Vehicle: 1/unit •Bicycle: 1/ 5 units (80/20)	NP	NP	NP	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP				

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	E-SU-A E-SU-B E-SU-D E-SU-D1 E-SU-Dx E-SU-D1x E-SU-G E-SU-G1										E-MX-2x E-MX-2A E-MS-2x E-MX-2A E-MX-3A E-MS-2 E-MX-3 E-MS-5	APPLI-CABLE USE LIMITA-TIONS
		E-TU-B E-TU-C	E-RH-2.5 E-MU-2.5	E-RX-3 E-RX-5	E-CC-3x	E-CC-3							

CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION

Basic Utilities	Utility, Major Impact* •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	L-ZPSE	§ 11.3.1										
	Utility, Minor Impact* •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	L-ZP	§ 11.3.2										
Community/ Public Services	Community Center •Vehicle: .5 / 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	§ 11.3.3										
	Day Care Center •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	P-ZPIN	P-ZPIN	P-ZP	P-ZP	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.4
	Postal Facility, Neighborhood •Vehicle - MS only: 2/1,000 sf GFA •Vehicle: 2.5/ 1,000 sf GFA •Bicycle: 1/ 20,000 sf GFA (60/40)	NP	NP	NP	P-ZP								
	Postal Processing Center •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 20,000 sf GFA (60/40)	NP	NP	NP	P-ZP	P-ZP	P-ZP	NP	NP	P-ZP	P-ZP		
	Public Safety Facility •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	§ 11.3.5						
	Hospital	NP											
Cultural/Special Purpose/Public Parks & Open Space	Correctional Institution	NP											
	Cemetery*	NP											
	Library •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	P-ZP											
	Museum •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	NP	NP	NP	NP	P-ZP							
	City Park*	NP											
	Open Space - Conservation* •No Parking Requirements	P-ZP											

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with
Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI-CABLE USE LIMITA-TIONS								
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-SU-G	E-TU-B	E-RH-2.5	E-RX-3	E-CC-3x	E-CC-3	E-MX-2x	E-MX-2A	E-MX-3A	E-MX-3	E-MS-2x	E-MS-2	E-MS-3
Education	Elementary or Secondary School •Vehicle- High School: 2/1,000 sf GFA •Bicycle - High School: 1/ 20,000 sf GFA (0/100) •Vehicle- All Others: 1/1,000 sf GFA •Bicycle-All Others: 1/ 10,000 sf GFA (0/100)																			§11.3.8
Education	University or College •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	NP	NP	NP	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.3.8	
Education	Vocational or Professional School •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.3.8	
Public and Religious Assembly	All Types •Vehicle: .5/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.10	
COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION														See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.						
Adult Business	All Types	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.



KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with
 Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI-CABLE USE LIMITA-TIONS									
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-SU-G	E-TU-B	E-RH-2.5	E-RX-3	E-CC-3x	E-CC-3	E-MX-2x	E-MX-2A	E-MX-3A	E-MX-3	E-MS-2x	E-MX-2	E-MS-2	E-MX-3
Arts, Recreation & Entertainment	Arts, Recreation and Entertainment Services, Indoor • Vehicle - Artist Studio: 0.3/1000 sf GFA • Vehicle - All Others - MS only: 2/1,000 sf GFA • Vehicle - All Others: 2.5/ 1,000 sf GFA • Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP		P-ZP	P-ZP	P-ZP	L-ZPIN		L-ZP		P-ZP	P-ZP							§ 11.4.2
	Arts, Recreation and Entertainment Services, Outdoor* • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 2.5/ 1,000 sf GFA • Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZPSE	L-ZP	NP	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE								§ 11.4.3
	Event Space with Alternate Parking and Loading* • Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP		
	Sports and/or Entertainment Arena or Stadium*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP		
Nonresidential Uses in Existing Business Structures In Residential Zones (All Uses Shall Be Parked According to the Parking Requirement Stated in this Use Table for the Specific Nonresidential Use)		L-ZPIN	L-ZPIN	L-ZPIN	Not Applicable										§ 11.4.6						
Parking of Vehicles	Parking, Garage • No Parking Requirements	NP	NP	NP	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP		
	Parking, Surface* • No Parking Requirements	NP	L-ZP	L-ZP	NP	P-ZP	P-ZP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	§ 11.4.8
Eating & Drinking Establishments	All Types • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 4.5/ 1,000 sf GFA • Bicycle: 1/5,000 sf GFA (0/100)	NP	NP	NP	P-ZP	P-ZP	P-ZP	L-ZPSE	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.4.9	
	Bed and Breakfast Lodging • Vehicle: 1/guest room or unit • Bicycle: 1/ 20,000 sf GFA (60/40)	NP	NP	NP	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP		
Lodging Accommodations	Lodging Accommodations, All Others • Vehicle: 1/ guest room or unit • Bicycle: 1/ 20,000 sf GFA (60/40)	NP	NP	NP	P-ZP	P-ZP	P-ZP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP		

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI-CABLE USE LIMITA-TIONS									
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-SU-G	E-TU-B	E-RH-2.5	E-RX-3	E-CC-3x	E-CC-3	E-MX-2x	E-MX-2A	E-MX-2	E-MX-3A	E-MX-3	E-MS-2x	E-MS-2	E-MS-2
Office	Dental / Medical Office or Clinic •Vehicle: 2/ 1,000 sf GFA •Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$ 11.4.10		
	Office, All Others •Vehicle: 2/ 1,000 sf GFA •Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP			
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Animal Sales and Services, Household Pets Only •Vehicle - MS only: 2/1,000 sf GFA •Vehicle: 2.5/ 1,000 sf GFA •Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZPIN	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP						\$11.4.11; \$11.4.12		
	Animal Sales and Services, All Others	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP								
	Food Sales or Market •Vehicle - MS only: 2/1,000 sf GFA •Vehicle: 2.5/ 1,000 sf GFA •Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	L-ZP	P-ZP	P-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP						\$11.4.11; \$11.4.14		
	Pawn Shop	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP								
	Retail Sales, Service & Repair -- Outdoor* •Vehicle - MS only: 2/1,000 sf GFA •Vehicle: 2.5/ 1,000 sf GFA •Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	NP	NP	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	NP	NP						\$11.4.11; \$11.4.16		
	Retail Sales, Service & Repair - Firearms Sales •Vehicle - MS only: 2/1,000 sf GFA •Vehicle: 2.5/ 1,000 sf GFA •Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	NP	NP	P-ZP	NP	NP	NP	NP	P-ZP									
	Retail Sales, Service & Repair, All Others •Vehicle - MS only: 2/1,000 sf GFA •Vehicle: 2.5/ 1,000 sf GFA •Bicycle: 1/20,000 sf GFA (20/80)	NP	NP	NP	P-ZP	P-ZP	P-ZP	L-ZP/L-ZPIN	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP						\$11.4.11		

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI-CABLE USE LIMITA-TIONS									
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-SU-G	E-TU-B	E-RH-2.5	E-RX-3	E-CC-3x	E-MX-2x	E-MX-2A	E-MX-3A	E-MX-3	E-MS-2x	E-MX-2	E-MS-2	E-MX-3	E-MS-5
Vehicle / Equipment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	P-ZP	P-ZP	NP	L-ZP	P-ZP	P-ZP	NP	L-ZP	P-ZP	P-ZP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.4.17
	Automobile Services, Light •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	NP	L-ZPSE	L-ZP	L-ZP	NP	L-ZPSE	L-ZP	L-ZP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.4.18; § 11.4.19
	Automobile Services, Heavy •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP/ ZPSE	NP	NP	NP	NP	NP	NP	NP	NP	NP	L-ZP/ ZPSE	NP	NP	L-ZP/ ZPSE	§ 11.4.18; § 11.4.20
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer* •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	L-ZP	NP	L-ZP	NP	NP	NP	NP	NP	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.4.21
	Heavy Vehicle/ Equipment Sales, Rentals & Service* •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	NP	P-ZPSE	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	

INDUSTRIAL, MANUFACTURING & WHOLESALE PRIMARY USE CLASSIFICATION

Communications and Information	Antennas Not Attached to a Tower* •No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.5.2
	Communication Services •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	NP	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	E-MS-3: L-ZP/ ZPSE; E-MS-5 P-ZP	NP	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	NP	L-ZP/ ZPSE	L-ZP/ ZPSE	§ 11.5.1
	Telecommunications Towers* •No Parking Requirements	L-ZP/ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	§ 11.5.2								
	Telecommunications Tower - Alternative Structure* •No Parking Requirements	L-ZP/ZPIN	L-ZP/ ZPIN	L-ZP/ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	§ 11.5.2								
	Telecommunication Facilities – All Others* •No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§ 11.5.2

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice L = Permitted Use with Limitations
ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI-CABLE USE LIMITA-TIONS							
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-SU-G	E-TU-B	E-RH-2.5	E-RX-3	E-CC-3x	E-CC-3	E-MX-2x	E-MX-2A	E-MX-2	E-MX-3A	E-MX-3	E-MS-2x
Industrial Services	Contractors, Special Trade - General •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	NP	NP	L-ZP	NP	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.5.3	
	Contractors, Special Trade - Heavy/ Contractor Yard*	NP	NP	NP	NP	NP	NP	NP											
	Food Preparation and Sales, Commercial •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZPIN	L-ZPIN	L-ZPIN	L-ZP	L-ZP	L-ZP	§ 11.5.5					
	Laboratory, Research, Development and Technological Services •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	NP	NP	L-ZP	NP	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.5.6		
	Service/Repair, Commercial •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	NP	NP	L-ZP	NP	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.5.7		
Manufacturing and Production	Manufacturing, Fabrication & Assembly -- Custom •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	L-ZPIN	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.5.8								
	Manufacturing, Fabrication & Assembly -- General •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	NP	NP	L-ZP/ ZPSE	NP	NP	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	§ 11.5.9					
	Manufacturing, Fabrication & Assembly -- Heavy	NP	NP	NP															
Mining & Extraction and Energy Producing Systems	Oil, Gas -- Production, Drilling*	NP	NP	NP															
	Sand or Gravel Quarry*	NP	NP	NP															
	Wind Energy Conversion Systems* •No Parking Requirements	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	§ 11.5.13															
Transportation Facilities	Airport*	NP	NP	NP															
	Helipad, Heliport, Heliport* •No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZP	L-ZP	L-ZPIN	L-ZPIN	L-ZPIN	L-ZP	L-ZP	L-ZP	§ 11.5.14					
	Railroad Facilities*	NP	NP	NP															
	Railway Right-of-Way* •No Parking Requirements	P-ZP	P-ZP	P-ZP															
	Terminal, Station or Service Facility for Passenger Transit System •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§ 11.5.16											
	Terminal, Freight, Air Courier Services	NP	NP	NP															
Waste Related Services	Automobile Parts Recycling Business*	NP	NP	NP															
	Junkyard*	NP	NP	NP															
	Recycling Center	NP	NP	NP															
	Recycling Collection Station	NP	NP	NP															
Waste Related Services	Recycling Plant, Scrap Processor	NP	NP	NP															
	Solid Waste Facility	NP	NP	NP															

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with
 Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI-CABLE USE LIMITA-TIONS						
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-SU-G	E-TU-B	E-RH-2.5	E-RX-3	E-CC-3x	E-MX-2x	E-MX-2A	E-MX-3A	E-MS-2x	E-MX-2E	E-MS-3E
Wholesale, Storage, Warehouse & Distribution	Automobile Towing Service Storage Yard*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Mini-storage Facility •Vehicle: 0.1/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	P-ZP	P-ZP	NP	NP	P-ZP	NP	NP	L-ZP	NP	NP	NP	NP	§ 11.5.23
	Vehicle Storage, Commercial* •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	NP	NP	L-ZPIN	NP	L-ZPIN	NP	NP	NP	NP	NP	NP	NP	§ 11.5.24
	Wholesale Trade or Storage, General •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	NP	P-ZPIN	NP	NP	P-ZPIN	NP	NP	NP	NP	NP	NP	NP	
	Wholesale Trade or Storage, Light •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	NP	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	NP	NP	L-ZP/ ZPIN/ ZPSE	NP	NP	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	§ 11.5.26
AGRICULTURE PRIMARY USE CLASSIFICATION																		
Agriculture	Aquaculture*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Garden, Urban*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.2
	Husbandry, Animal*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Husbandry, Plant*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Plant Nursery •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.5

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with
Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI- CABLE USE LIMITA- TIONS
	E-SU-A E-SU-B E-SU-D E-SU-D1 E-SU-Dx E-SU-D1x E-SU-G E-TU-B E-RH-2.5 E-RX-3 E-CC- E-SU-G1 E-TU-C E-MU-2.5 E-RX-5 3x E-CC-3 							E-MX- 2x	E-MX- 2A	E-MX- 3A	E-MS- 2x	E-MS-3 E-MS-2 E-MX-3 E-MS-5

ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Residential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts										§ 11.7
	Accessory Dwelling Unit	E-SU-D1, -D1x, -G1 only: L-ZP All other: NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.7, § 11.8.2
	Domestic Employee	L	L	L	L	L	L	L	L	L	L	§ 11.7; § 11.8.3
	Garden*	L	L	L	L	L	L	L	L	L	L	§ 11.7, § 11.8.4
	Keeping of Household Animals*	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	§ 11.7; § 11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	L	L	L	L	L	L	L	L	L	§ 11.7; § 10.9
	Kennel or Exercise Run*	L	L	L	L	L	L	L	L	L	L	§ 11.7; § 11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	NP	NP	NP	L-ZP	Not Applicable - See Permitted Primary Uses						§ 11.7; § 11.8.7
	Outdoor Storage, Residential*	L	L	L	L	L	L	L	L	L	L	§ 11.7; § 11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	L-ZP	L-ZP	NP	NP	§ 11.7; § 11.8.9
	Short-term Rental	L	L	L	L	L	L	L	L	L	L	§ 11.7; § 11.8.10
	Vehicle Storage, Repair and Maintenance*	L	L	L	L	L	L	L	L	L	L	§ 11.7; § 10.9
	Wind Energy Conversion Systems*	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	Not Applicable - See Permitted Primary Uses						§ 11.7, § 11.5.13
	Yard or Garage Sales*	L	L	L	L	L	L	L	L	L	L	§ 11.7; § 11.8.11

HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Home Occupations (Parking is Not Required for Home Occupations Unless Specifically Stated in this Table or in an Applicable Use Limitations)	Child Care Home, Large	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§ 11.9; § 11.9.3
	All Other Types	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.9; § 11.9.4
	Unlisted Home Occupations	L-ZPIN - Applicable to all Zone Districts										

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with
 Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI- CABLE USE LIMITA- TIONS	
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-MX- 2x	E-MX- 2A	E-MX- 3A	E-MS- 2x	E-MX- 2	E-MS- 3
	E-SU-G E-TU-B E-RH-2.5 E-RX-3 E-CC- E-SU-G1 E-TU-C E-MU-2.5 E-RX-5 3x E-CC-3												

ACCESSORY TO PRIMARY NONRESIDENTIAL USES USE CLASSIFICATION


Accessory to Primary Nonresidential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts										§ 11.7; § 11.10.1		
	Amusement Devices Accessory to Eating/Drinking Establishments, College/University and Theater Uses	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.7; § 11.10.2		
	Automobile Rental Services Accessory to Certain Retail Uses*	NP	NP	NP	Not Applicable - See Permitted Primary Uses	L	Not Applicable - See Permitted Primary Uses	NP	NP	Not Applicable - See Permitted Primary Uses	Not Applicable - See Permitted Primary Uses	§ 11.7; § 11.10.3		
	Book or gift store; media recording and production facilities accessory to public libraries, museums, places of religious assembly, colleges or universities	L	L	L	Not Applicable - See Permitted Primary Uses								§ 11.7; § 11.10.4	
	Car Wash Bay Accessory to Automobile Services	NP	NP	NP	L-ZP	L-ZP	L-ZP	NP	NP	L-ZP	NP	§ 11.7; § 11.10.5		
	College accessory to a Place for Religious Assembly	L	L	L	Not Applicable - See Permitted Primary Uses			L	Not Applicable - See Permitted Primary Uses			§ 11.7; § 11.10.6		
	Conference Facilities Accessory to Hotel Use	NP	NP	NP	L	L	L	NP	NP	L	L	§ 11.7; § 11.10.7		
	Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses*	NP	NP	NP	NP	L-ZP	L-ZP	NP	L-ZP	L-ZP	L-ZP	§ 11.7; § 11.10.8		
	Emergency Vehicle Access Point	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP		
	Garden*	L	L	L	L	L	L	L	L	L	L	§ 11.7; § 11.10.10		
	Keeping of Animals	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZP/L-ZPIN	§ 11.7; § 11.10.11		
	Nonresidential Uses in Existing Business Structures in Residential Zones - Accessory Uses	L	L	L	Not Applicable - See Permitted Primary Uses	Not Applicable								§ 11.4.6

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)											APPLI-CABLE USE LIMITA-TIONS												
		E-SU-A	E-SU-B	E-SU-D	E-SU-D1	E-SU-Dx	E-SU-D1x	E-SU-G	E-SU-G1	E-TU-B	E-RH-2.5	E-MU-2.5	E-RX-3	E-RX-5	E-CC-3x	E-CC-3	E-MX-2x	E-MX-2x	E-MX-2A	E-MX-2A	E-MX-3A	E-MX-3A	E-MS-2x	E-MS-2x
Accessory to Primary Nonresidential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Occasional Sales, Services Accessory to Places of Religious Assembly*	L	L	L	L	L	L	L	L	NP	NP	NP	L-ZP/ ZPSE	\$11.7; §11.10.12										
	Outdoor Eating and Serving Area Accessory to Eating/Drinking Establishment Use*	NP	NP	NP	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	NP	NP	NP	L-ZP/ ZPSE	\$11.7; §11.10.13										
	Outdoor Entertainment Accessory to an Eating/Drinking Establishment Use*	NP	NP	NP	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	NP	NP	NP	L-ZPIN/ ZPSE	\$11.7; §11.10.14										
	Outdoor Retail Sale and Display*	NP	NP	NP	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	NP	NP	NP	L-ZP/ ZPSE	\$11.7; §11.10.15										
	Outdoor Storage, General*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	\$11.7; §11.10.16	
	Outdoor Storage, Limited*	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	NP	NP	L-ZP	\$11.7; §11.10.17										
	Rental or Sales of Adult Material Accessory to a Permitted Book-store Retail Sales Use	NP	NP	NP	L	L	L	L	L	NP	NP	NP	L	L	L	L	L	L	L	L	L	L	\$11.7; §11.10.18	
TEMPORARY USE CLASSIFICATION																								
Temporary Uses (Parking is Not Required for Temporary Uses Unless Specifically Stated in this Table or in an Applicable Use Limitations)	Unlisted Temporary Uses	L - Applicable to all Zone Districts										Not Applicable - See Permitted Primary Uses									§ 11.11.1			
	Ambulance Service - Temporary	NP	NP	NP	L-ZP	Not Applicable - See Permitted Primary Uses										§ 11.11.2								
	Amusement / Entertainment - Temporary*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP		
	Bazaar, Carnival, Circus or Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.4	
	Building or yard for construction materials*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.5	
	Concrete, Asphalt, and Rock Crushing Facility*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.6	
	Fence for Demolition or Construction Work	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.7	
	Health Care Center	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	\$11.11.8	
	Noncommercial Concrete Batching Plant*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.9	
	Outdoor Retail Sales - Pedestrian /Transit Mall*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Outdoor Retail Sales*	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	\$11.11.11
	Outdoor Sales, Seasonal*	NP	NP	NP	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	\$11.11.12	
	Parking Lot Designated for a Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.13	
	Retail Food Establishment, Mobile*	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	\$11.11.14
	Temporary Construction Office	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.15	
	Temporary Office - Real Estate Sales	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.16	
	Temporary Tiny Home Village	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	\$11.11.17	
	Tent for Religious Services	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	



ARTICLE 5. URBAN (U-) NEIGHBORHOOD CONTEXT

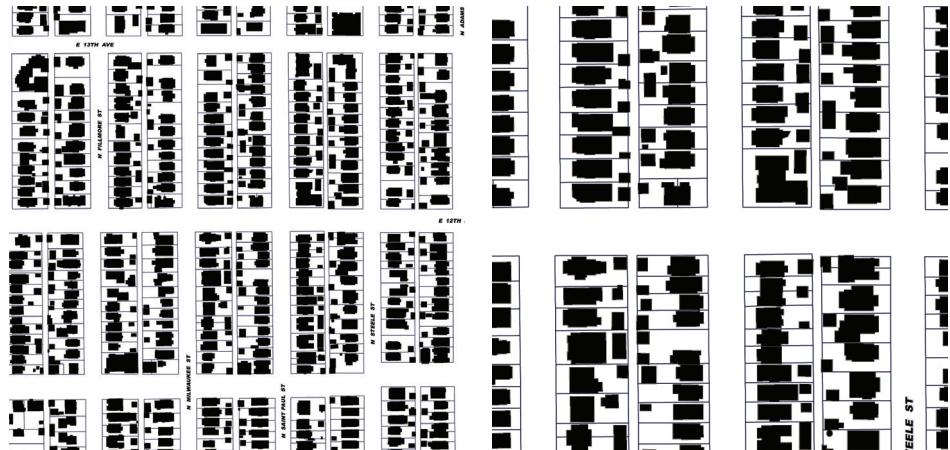

URBAN HOUSE

		U-SU-A, A1, A2	U-SU-B, B1, B2	U-SU-C U-TU-B, B2	U-SU-E U-TU-C	U-SU-H U-SU-C2	U-RH-2.5 U-RH-3A
HEIGHT							
Stories, front 65% / rear 35% of zone lot depth (max)		2.5/1	2.5/1	2.5/1	2.5/1	3/1	2.5/1
A/B Feet, front 65% / rear 35% of zone lot depth (max)		30'/17'	30'/17'	30'/17'	30'/17'	30'/17'	30'/17'
Feet, front 65% of zone lot depth, permitted height increase		1' for every 5' increase in lot width over 50' up to a maximum height of 35'					
Feet, rear 35% of zone lot depth, permitted height increase		1' for every 3' increase in side setback up to a maximum height of 19'					
Bulk Plane Vertical Height at Side Interior and Side							
C/D Street zone lot line in front 65% / rear 35% of Zone Lot Depth		17'/10'	17'/10'	17'/10'	17'/10'	17'/10'	17'/10'
Bulk Plane Slope from Side Interior and Side Street zone lot line		45°	45°	45°	45°	45°	45°
SITING		U-SU-A, A1, A2	U-SU-B, B1, B2	U-SU-C U-TU-C	U-SU-E C1, C2	U-SU-H E, E1	U-RH-2.5 U-RH-3A
ZONE LOT							
Zone Lot Size (min)		3,000 sf	4,500 sf	5,500 sf	7,000 sf	10,000 sf	3,000 sf
E Zone Lot Width (min)		25'	35'	50'	50'	75'	25'
SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH							
		30' or Less	Greater than 30' and up to 40'	Greater than 40' and less than 75'	75' or Greater		
F Primary Street, block sensitive setback required		yes	yes	yes	yes	yes	yes
F Primary Street, where block sensitive setback does not apply (min)		20'	20'	20'	20'	20'	20'
G Side Street (min)		3'	5'	5'	5'	7.5'	7.5'
H Side Interior (min)		3'	3' min one side/ 10' min combined	3' min one side/ 10' min combined	5'	10'	10'
I Rear, alley/no alley (min)		12'/20'	12'/20'	12'/20'	12'/20'	12'/20'	12'/20'
Building Coverage per Zone Lot, including all accessory structures (max)		50%	37.5%	37.5%	37.5%	37.5%	37.5%
PARKING BY ZONE LOT WIDTH							
Parking and Drive Lot Coverage in Primary Street Setback (max)		2 Spaces and 320 sf	2 Spaces and 320 sf	33%	33%	33%	33%
Vehicle Access		From Alley; or Street access allowed when no Alley present (See Sec. 5.3.7.6)					
J DETACHED ACCESSORY STRUCTURES		see Sec. 5.3.4					
DESIGN ELEMENTS		U-SU-A, A1, A2	U-SU-B, B1, B2	U-SU-C U-TU-C	U-SU-E U-SU-C2	U-SU-H U-SU-E1	U-RH-2.5 U-RH-3A
BUILDING CONFIGURATION							
Attached Garage Allowed		(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use. (2) May follow the Detached Garage building form Side Street, Side Interior and Rear setbacks					
Primary Street Facing Attached Garage Door Width in first 50% of lot depth (max)		35% of the entire width of the Primary Street facing facade of the primary structure or 16', whichever is greater					
Rooftop and/or Second Story Decks		See Section 5.3.5.2					
Upper Story Stepback, for any portion of building with Low-slope Roof, above 25': Primary Street (min)		10'	10'	10'	10'	10'	10'
STREET LEVEL ACTIVATION							
K Pedestrian Access, Primary Street		Entry Feature					
USES		All U-SU, TU and RH Zone Districts					
Primary Uses shall be limited to Single Unit Dwelling and permitted Group Residential Care and Nonresidential uses. See Division 5.4 Uses and Parking							

DUPLEX

			U-SU-A2*	U-SU-B2*	U-SU-C2*	U-TU-B	U-TU-B2	U-TU-C	U-RH-2.5	U-RH-3A							
HEIGHT			2.5/1	2.5/1	2.5/1	2.5/1	2.5/1	2.5/1	2.5/1	2.5/1							
A/B Stories, front 65% / rear 35% of zone lot depth (max)		30'/17'	30'/17'	30'/17'	30'/17'	30'/17'	30'/17'	30'/17'	30'/17'	30'/17'							
A/B Feet, front 65% / rear 35% of lot depth (max)		1' for every 5' increase in lot width over 50' up to a maximum height of 35'		1' for every 3' increase in side setback up to a maximum height of 19'													
C/D Feet, front 65% of zone lot depth, permitted height increase																	
C/D Feet, rear 35% of zone lot depth, permitted height increase																	
C/D Bulk Plane Vertical Height at Side interior and Side street zone lot line in front 65% / rear 35% of zone lot depth		17'/10'	17'/10'	17'/10'	17'/10'	17'/10'	17'/10'	17'/10'	17'/10'	17'/10'	17'/10'						
C/D Bulk Plane Slope from Side interior and Side Street zone lot line		45°	45°	45°	45°	45°	45°	45°	45°	45°	45°						
SITING			U-SU-A2*	U-SU-B2*	U-SU-C2*	U-TU-B	U-TU-B2	U-TU-C	U-RH-2.5	U-RH-3A							
ZONE LOT																	
E Zone Lot Size (min)		3,000 sf	4,500 sf	5,500 sf	4,500 sf	5,500 sf	4,500 sf	5,500 sf	4,500 sf	4,500 sf							
E Zone Lot Width (min)		25'	35'	50'	35'	50'	35'	50'	35'	35'							
U-SU-A2*, -B2*, -C2*; All U-TU, RH Districts																	
SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH			30' or Less	Greater than 30' and up to 40'		Greater than 40' and less than 75'	75' or Greater										
F Primary Street, block sensitive setback required		yes		yes		yes		yes									
F Primary Street, where block sensitive setback does not apply (min)		20'		20'		20'		20'									
G Side Street (min)		3'		5'		5'		5'									
H Side Interior (min)		3'		3' min one side/ 10' min combined		5'		10'									
I Rear, alley/no alley (min)		12'/20'		12'/20'		12'/20'		12'/20'									
Building Coverage per Zone Lot, including all accessory structures (max)		50%		37.5%		37.5%		37.5%									
PARKING BY ZONE LOT WIDTH																	
Parking and Drive Lot Coverage in Primary Street Setback (max)		50%		50%		33%		50%									
Vehicle Access		From Alley; or Street access allowed when no Alley present (See Section 5.3.7.6)															
J DETACHED ACCESSORY STRUCTURES																	
			U-SU-A2*	U-SU-B2*	U-SU-C2*	U-TU-B	U-TU-B2	U-TU-C	U-RH-2.5	U-RH-3A							
DESIGN ELEMENTS																	
BUILDING CONFIGURATION																	
Attached Garage Allowed		(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use. (2) May follow the Detached Garage building form standards Side Street, Side Interior and Rear setbacks															
Primary Street Facing Attached Garage Door Width in first 50% of lot depth (max)		35% of the entire width of the Primary Street facing facade of the dwelling primary structure or 16', whichever is greater															
Rooftop and/or Second Story Decks		See Section 5.3.5.2															
Upper Story Stepback, for any portion of building with Low-slope Roof, above 25': Primary Street (min)		10'	10'	10'	10'	10'	10'	10'	10'	10'							
STREET LEVEL ACTIVATION																	
K Pedestrian Access, Primary Street		Entry Feature															
USES			U-SU-A2*, -B2*, -C2*; All U-TU, RH Districts														
Primary Uses shall be limited to Two Unit Dwelling and permitted Group Residential Care and Nonresidential uses. See Division 5.4 Uses and Parking																	

See Sections 5.3.5 - 5.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

*Form is permitted ONLY on corner zone lots where at least one of the intersecting streets is a collector or arterial street, according to the functional street classifications adopted by the Public Works Department.

APARTMENT

HEIGHT	U-RH-3A*
A Stories (max)	3
A Feet (max)	38'

SITING	U-RH-3A*
ZONE LOT	
Zone Lot Size (min/max)	
Zone Lot Width (min)	
SETBACKS	
B Primary Street, block sensitive setback required	yes
B Primary Street, where block sensitive setback does not apply (min)	20'
C Side Street (min)	10'
D Side Interior (min)	5'
E Rear, alley/no alley (min)	12/20'
PARKING	
Surface Parking between building and Primary Street/Side Street	Not Allowed/Allowed
Vehicle Access	Shall be determined as part of Site Development Plan Review

DESIGN ELEMENTS	U-RH-3A*
BUILDING CONFIGURATION	
Dwelling Unit Configuration	
Structure may contain Side-by-Side Dwelling Units Residential Only Structure: Side-by-Side Dwelling Units shall not exceed 50% of the Structure's GFA	
Street facing garage door width per Primary Structure (max)	
20'	
Rooftop and/or Second Story Decks	
See Section 5.3.5.2	
STREET LEVEL ACTIVATION	
Transparency, Primary Street (min)	
40%	
Transparency, Side Street (min)	
25%	
F Pedestrian Access, Primary Street or Side Street	
Entrance	

USES	U-RH-3A*
Primary Uses shall be limited to Multi Unit Dwelling (3+) and permitted Group-Living-Congregate Living, Residential Care , and Nonresidential uses. See Division 5.4 Uses and Parking	
See Sections 5.3.5 - 5.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions	

*Form is permitted ONLY on corner zone lots where at least one of the intersecting streets is a collector or arterial street, according to the functional street classifications adopted by the Public Works Department.

5.4.3.2 Permitted, Limited, Not Permitted

A. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations.

B. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

C. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

5.4.3.3 Zoning Procedure

A. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

B. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

C. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

D. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

E. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

5.4.3.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type. For

example, the asterisk following the “Telecommunication Tower*” use type in the tables indicates that a telecommunication tower land use need not be enclosed.

SECTION 5.4.4 DISTRICT SPECIFIC STANDARDS

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	U-SU-A U-SU-A1 U-SU-A2 U-SU-B U-SU-B1 U-SU-B2 U-SU-C U-SU-C1 U-SU-C2 U-SU-E U-SU-E1 U-SU-H U-SU-H1	U-TU-B U-TU-B2 U-TU-C U-RH-2.5 U-RH-3A U-RX-3 U-RX-5 U-MX-2x U-MS-2x U-MX-2 U-MS-2 U-MX-3 U-MS-3 U-MX-5 U-MS-5	APPLICABLE USE LIMITATIONS
--------------	---	--	--	----------------------------

RESIDENTIAL PRIMARY USE CLASSIFICATION

Household Living	Dwelling, Single Unit • Vehicle: 5 or fewer adults: No Parking Requirements. • Vehicle: 6 or more adults: 1/unit • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	<u>§11.2.6</u>
	Dwelling, Two Unit • Vehicle: 1/unit • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	<u>§ 11.2.2; §11.2.6</u>
	Dwelling, Multi-Unit • Vehicle: 1/unit • Bicycle: 1/ 4 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	<u>§ 11.2.3; §11.2.6</u>
	Dwelling, Live / Work • Vehicle: 1/unit • Bicycle: 1/ 4 units (80/20)	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	<u>§ 11.2.4; §11.2.6</u>
Residential Care	<u>Residential Care, Type 1</u> • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	<u>§11.2.7; §11.2.8</u>
	<u>Residential Care, Type 2</u> • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	<u>§11.2.7; §11.2.9</u>
	<u>Residential Care, Type 3</u> • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	L-ZPCIM	NP	NP	L-ZPCIM	L-ZPCIM	<u>§11.2.7; §11.2.10</u>
	<u>Residential Care, Type 4</u> • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	L-ZPCIM	L-ZPCIM	<u>§11.2.7; §11.2.11</u>
Congregate Living	All Types • Vehicle: 1/1,000 sf GFA • Bicycle: 1/20,000 sf GFA	NP	NP	U-RH-2.5: NP U-RH-3A: P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZIPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZIPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	APPLICABLE USE LIMITATIONS																										
		U-SU-A	U-SU-A1	U-SU-A2	U-SU-B	U-SU-B1	U-SU-B2	U-SU-C	U-SU-C1	U-SU-C2	U-SU-E	U-SU-E1	U-TU-B	U-SU-H	U-TU-B2	U-TU-C	U-RH-2.5	U-RH-3A	U-RX-3	U-RX-5	U-MX-2x	U-MS-2x	U-MX-2	U-MS-2	U-MX-3	U-MS-3	U-MX-5	U-MS-5
Group Living	Assisted Living Facility • Vehicle: .75/unit • Bicycle: No requirement	L-ZPIN	L-ZPIN	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§11.2.6; §11.2.7	
	Community Corrections Facility	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	
	Nursing Home, Hospice • Vehicle: .75/unit • Bicycle: No requirement	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP		
	Residence for Older Adults • Vehicle: .75/unit • Bicycle: No requirement	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§11.2.8	
	Residential Care Use, Small or Large • Vehicle: .25/unit • Bicycle: No requirement	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.2.9	
	Rooming and Boarding House • Vehicle~ MS only: 2/1,000-sf GFA • Vehicle: 4.5/1,000-sf GFA • Bicycle: No Requirement	NP	NP	NP	P-ZP	P-ZP	NP	NP	NP	NP	NP	NP	NP	NP	P-ZP													
	Shelter for the Homeless • Vehicle: 5/1,000-sf GFA • Bicycle: No requirement	L	L	L	L-ZPIN/L	L-ZPIN/L	L	L	L	L	L	L	L	L	L-ZPIN/L	§11.2.11												
	Student Housing • Vehicle: 1/unit • Bicycle: 1/4 units (80/20)	NP	NP	NP	P-ZP	P-ZP	NP	NP	NP	NP	NP	NP	NP	NP	P-ZP													

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	APPLICABLE USE LIMITATIONS																								
		U-SU-A	U-SU-A1	U-SU-A2	U-SU-B	U-SU-B1	U-SU-B2	U-SU-C	U-SU-C1	U-SU-C2	U-SU-E	U-SU-E1	U-TU-B	U-SU-H	U-TU-B2	U-RH-2.5	U-RX-3	U-MX-2x	U-MX-2	U-MS-3	U-SU-H1	U-TU-C	U-RH-3A	U-RX-5	U-MS-2x	U-MS-2

CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION

Basic Utilities	Utility, Major Impact* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZPSE	§ 11.3.1																
	Utility, Minor Impact* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZP	§ 11.3.2																
Community/ Public Services	Community Center • Vehicle: .5 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	L-ZP	§ 11.3.3																
	Day Care Center • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	L-ZP	L-ZP	P-ZPIN	§ 11.3.4														
	Postal Facility, Neighborhood • Vehicle: 2.5 / 1,000 sf GFA • MS only: 2 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (20/80)	NP	NP	NP	P-ZP														
	Postal Processing Center • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (20/80)	NP	NP	NP	P-ZP	NP													
	Public Safety Facility • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	§ 11.3.5												
	Hospital	NP																	
Cultural/Special Purpose/Public Parks & Open Space	Correctional Institution	NP																	
	Cemetery*	NP																	
	Library • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	P-ZP																	
	Museum • Vehicle: 1 / 1,000 sf GFA • Bicycle: 1 / 10,000 sf GFA (0/100)	NP	NP	NP	P-ZP														
	City Park*	NP																	
	Open Space - Conservation* • No Parking Requirements	P-ZP																	

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZIPN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZIPN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	APPLICABLE USE LIMITATIONS							
		U-SU-A U-SU-A1 U-SU-A2 U-SU-B U-SU-B1 U-SU-B2 U-SU-C U-SU-C1 U-SU-C2 U-SU-E U-SU-E1 U-SU-H U-SU-H1	U-TU-B U-TU-B2 U-TU-C	U-RH-2.5 U-RH-3A	U-RX-3 U-RX-5	U-MX-2x U-MS-2x	U-MX-2 U-MS-2	U-MX-3 U-MS-3	U-MS-3 U-MS-5
Education	Elementary or Secondary School •Vehicle- High School: 2/1,000 sf GFA •Bicycle - High School: 1/ 10,000 sf GFA (0/100) •Vehicle- All Others: 1/1,000 sf GFA •Bicycle-All Others: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
	University or College •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	NP	NP	NP	L-ZP	NP	L-ZP	L-ZP	§ 11.3.8; § 11.3.9
	Vocational or Professional School •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
Public and Religious Assembly	All Types •Vehicle: .5/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§ 11.3.10.
COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION									
Adult Business	All Types	NP	NP	NP	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.



KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
 ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE <ul style="list-style-type: none"> • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility) 	APPLICABLE USE LIMITATIONS																				
		U-SU-A	U-SU-A1	U-SU-A2	U-SU-B	U-SU-B1	U-SU-B2	U-SU-C	U-SU-C1	U-SU-C2	U-SU-E	U-SU-E1	U-TU-B	U-SU-H	U-TU-B2	U-RH-2.5	U-RX-3	U-MX-2x	U-MX-2	U-MS-2	U-MX-3	U-MS-3
Arts, Recreation and Entertainment	Arts, Recreation and Entertainment Services, Indoor <ul style="list-style-type: none"> • Vehicle - Artist Studio: 0.3/1000 sf GFA • Vehicle - All Others - MS only: 2/1,000 sf GFA • Vehicle - All Others: 2.5/ 1,000 sf GFA • Bicycle: 1/10,000 sf GFA (20/80) 	NP	NP	NP		P-ZP		L-ZPIN		L-ZP		P-ZP		P-ZP		P-ZP						§ 11.4.2
	Arts, Recreation and Entertainment Services, Outdoor* <ul style="list-style-type: none"> • Vehicle - MS only: 2/1,000 sf GFA • Vehicle: 2.5/ 1,000 sf GFA • Bicycle: 1/10,000 sf GFA (20/80) 	NP	NP	NP		L-ZPSE		NP		L-ZPSE		L-ZPSE		L-ZPSE		L-ZPSE						§ 11.4.3
	Event Space with Alternate Parking and Loading* <ul style="list-style-type: none"> • Vehicle: No requirement • Bicycle: No requirement 	NP	NP	NP		NP		NP		NP		NP		NP		NP		NP		NP		
	Sports and/or Entertainment Arena or Stadium*	NP	NP	NP		NP		NP		NP		NP		NP		NP		NP		NP		
Nonresidential Uses in Existing Business Structures In Residential Zones (All Uses Shall Be Parked According to the Parking Requirement Stated in this Use Table for the Specific Nonresidential Use)		L-ZPIN	L-ZPIN	L-ZPIN	Not Applicable																	§ 11.4.6
Parking of Vehicles	Parking, Garage <ul style="list-style-type: none"> • No Parking Requirements 	NP	NP	NP		P-ZP		NP		P-ZP		P-ZP		P-ZP		P-ZP						
	Parking, Surface* <ul style="list-style-type: none"> • No Parking Requirements 	NP	L-ZP	L-ZP		NP		NP		NP		NP		NP		NP		NP		NP		§ 11.4.8
Eating & Drinking Establishments	All Types <ul style="list-style-type: none"> • Vehicle: 4.5/ 1,000 sf GFA • MS only: 2/1,000 sf GFA • Bicycle: 1/5,000 sf GFA (0/100) 	NP	NP	NP		P-ZP		L-ZPSE		L-ZP		P-ZP		P-ZP		P-ZP		P-ZP		P-ZP		§ 11.4.9

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZIPN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZIPN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	APPLICABLE USE LIMITATIONS																									
		U-SU-A	U-SU-A1	U-SU-A2	U-SU-B	U-SU-B1	U-SU-B2	U-SU-C	U-SU-C1	U-SU-C2	U-SU-E	U-SU-E1	U-TU-B	U-SU-H	U-TU-B2	U-TU-C	U-RH-2.5	U-RH-3A	U-RX-3	U-RX-5	U-MX-2x	U-MS-2x	U-MX-2	U-MS-2	U-MX-3	U-MS-3	U-MX-5
Lodging Accommodations	Bed and Breakfast Lodging •Vehicle: 1/guest room or unit •Bicycle: 1/ 10,000 sf GFA (60/40)	NP	NP	NP		P-ZP		NP		P-ZP		P-ZP		NP		NP		NP		NP		P-ZP		P-ZP		P-ZP	
	Lodging Accommodations, All Others •Vehicle: 1/ guest room or unit •Bicycle: 1/ 10,000 sf GFA (60/40)	NP	NP	NP		P-ZP		NP		NP		P-ZP		NP		NP		NP		NP		P-ZP		P-ZP		P-ZP	
Office	Dental / Medical Office or Clinic •Vehicle: 2/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (60/40)	NP	NP	NP		L-ZP		L-ZP		L-ZP		L-ZP		NP		NP		NP		NP		L-ZP		L-ZP		L-ZP	§11.4.10
	Office, All Others •Vehicle: 2/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (60/40)	NP	NP	NP		P-ZP		P-ZP		P-ZP		P-ZP		NP		NP		NP		NP		P-ZP		P-ZP		P-ZP	

KEY: * = Need Not be Enclosed **ZPCM = Community Information Meeting** P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	U-SU-A U-SU-A1 U-SU-A2 U-SU-B U-SU-B1 U-SU-B2 U-SU-C U-SU-C1 U-SU-C2 U-SU-E U-SU-E1 U-SU-H U-SU-H1								APPLICABLE USE LIMITATIONS
		U-TU-B U-TU-B2 U-TU-C	U-RH-2.5 U-RH-3A	U-RX-3 U-RX-5	U-MX-2x U-MS-2x	U-MX-2 U-MS-2	U-MX-3	U-MS-3 U-MS-5		
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Animal Sales and Services, Household Pets Only • Vehicle: 2.5/ 1,000 sf GFA • MS only: 2/1,000 sf GFA • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	L-ZP	L-ZPIN	L-ZP	L-ZP	L-ZP	\$11.4.12; \$11.4.11
	Animal Sales and Services, All Others	NP	NP	NP	NP	NP	NP	NP	NP	
	Food Sales or Market • Vehicle: 2.5/ 1,000 sf GFA • MS only: 2/1,000 sf GFA • Bicycle: 1/10,000 sf GFA(20/80)	NP	NP	NP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	\$11.4.14; \$11.4.11
	Pawn Shop • Vehicle: 2.5/ 1,000 sf GFA • MS only: 2/1,000 sf GFA • Bicycle: 1/10,000 sf GFA(20/80)	NP	NP	NP	NP	NP	NP	NP	NP	
	Retail Sales, Service & Repair -- Outdoor* • Vehicle: 2.5/ 1,000 sf GFA • MS only: 2/1,000 sf GFA Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZPIN	L-ZPIN	L-ZPIN	L-ZP	\$11.4.16; \$11.4.11
	Retail Sales, Service & Repair - Firearms Sales	NP	NP	NP	NP	NP	NP	NP	P-ZP	
	Retail Sales, Service & Repair, All Others • Vehicle: 2.5/ 1,000 sf GFA • MS only: 2/1,000 sf GFA • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	P-ZP	L-ZP/L-ZPIN	L-ZP	P-ZP	P-ZP	\$11.4.11

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	APPLICABLE USE LIMITATIONS																			
		U-SU-A	U-SU-A1	U-SU-A2	U-SU-B	U-SU-B1	U-SU-B2	U-SU-C	U-SU-C1	U-SU-C2	U-SU-E	U-SU-E1	U-TU-B	U-SU-H	U-TU-B2	U-RH-2.5	U-RX-3	U-MX-2x	U-MX-2	U-MS-3	
Vehicle / Equipment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	§11.4.17
	Automobile Services, Light • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	§11.4.18; §11.4.19
	Automobile Services, Heavy • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	§11.4.18 §11.4.20
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer* • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	§11.4.21
	Heavy Vehicle/ Equipment Sales, Rentals & Service*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	

INDUSTRIAL, MANUFACTURING & WHOLESALE PRIMARY USE CLASSIFICATION

Communications and Information	Antennas Not Attached to a Tower* • No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	§11.5.2														
	Communication Services • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	L-ZP/ZPSE	NP	L-ZP/ZPSE	U-MS-3: L-ZP/ZPSE U-MS-5: P-ZP		U-MS-3: L-ZP/ZPSE U-MS-5: P-ZP	U-MS-3: L-ZP/ZPSE U-MS-5: P-ZP	§11.5.1								
	Telecommunications Towers* • No Parking Requirements	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	L-ZP/ZPIN/ZPSE	§11.5.2														
	Telecommunications Tower - Alternative Structure* • No Parking Requirements	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	§11.5.2														
	Telecommunication Facilities -- All Others* • No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.5.2														

KEY: * = Need Not be Enclosed **ZPCM = Community Information Meeting** P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	APPLICABLE USE LIMITATIONS																			
		U-SU-A	U-SU-A1	U-SU-A2	U-SU-B	U-SU-B1	U-SU-B2	U-SU-C	U-SU-C1	U-SU-C2	U-SU-E	U-SU-E1	U-TU-B	U-SU-H	U-TU-B2	U-RH-2.5	U-RX-3	U-MX-2x	U-MX-2	U-MS-3	U-MX-3
Waste Related Services	Automobile Parts Recycling Business*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Junkyard*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Recycling Center	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Recycling Collection Station	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Recycling Plant, Scrap Processor	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Solid Waste Facility	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
Wholesale, Storage, Warehouse & Distribution	Automobile Towing Service Storage Yard*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Mini-storage Facility • Vehicle: 0.1 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	§11.5.23
	Vehicle Storage, Commercial*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Wholesale Trade or Storage, General	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Wholesale Trade or Storage, Light • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	L-ZP/ ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	NP	NP	§11.5.26	
AGRICULTURE PRIMARY USE CLASSIFICATION																					
Agriculture	Aquaculture*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Garden, Urban* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.6.2
	Husbandry, Animal*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Husbandry, Plant*	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
	Plant Nursery • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.6.5

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	U-SU-A U-SU-A1 U-SU-A2 U-SU-B U-SU-B1 U-SU-B2 U-SU-C U-SU-C1 U-SU-C2 U-SU-E U-SU-E1 U-TU-B U-SU-H U-TU-B2 U-RH-2.5 U-RX-3 U-MX-2x U-MX-2 U-MS-3 U-SU-H1 U-TU-C U-RH-3A U-RX-5 U-MS-2x U-MS-2 U-MX-3 U-MS-5	APPLICABLE USE LIMITATIONS
--------------	---	---	----------------------------

ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Residential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts								\$11.7
	Accessory Dwelling Unit	U-SU-A1, -A2, -B1, -B2, -C1, -C2, -E1, -H1 only: L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.7; \$11.8.2
	All others: NP									
	Domestic Employee	L	L	L	L	L	L	L	L	\$11.7; \$11.8.3
	Garden*	L	L	L	L	L	L	L	L	\$11.7; \$11.8.4
	Keeping of Household Animals*	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	\$11.7; \$11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	L	L	L	L	L	L	L	\$11.7; \$10.9
	Kennel or Exercise Run*	L	L	L	L	L	L	L	L	\$11.7; \$11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	NP	NP	NP	L-ZP	Not Applicable - See Permitted Primary Uses				\$11.7; \$11.8.7
	Outdoor Storage, Residential*	L	L	L	L	L	L	L	L	\$11.7; \$11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.7; \$11.8.9
	Short-term Rental	L	L	L	L	L	L	L	L	\$11.7; \$11.8.10
	Vehicle Storage, Repair and Maintenance*	L	L	L	L	L	L	L	L	\$11.7; \$10.9
	Wind Energy Conversion Systems*	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ZPSE	Not Applicable - See Permitted Primary Uses				\$11.7; \$11.5.8
	Yard and/or Garage Sales*	L	L	L	L	L	L	L	L	\$11.7; \$11.8.11

HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Home Occupations (Parking is Not Required for Home Occupations Unless Specifically Stated in this Table or in an Applicable Use Limitations)	Child Care Home, Large	L-ZPIN	\$11.9; \$11.9.3							
	All Other Types	L-ZP	\$11.9; \$11.9.4							
	Unlisted Home Occupations	L-ZPIN	\$11.9; \$11.9.5							

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	U-SU-A U-SU-A1 U-SU-A2 U-SU-B U-SU-B1 U-SU-B2 U-SU-C U-SU-C1 U-SU-C2 U-SU-E U-SU-E1 U-TU-B U-SU-H U-TU-B2 U-SU-H1 U-TU-C U-RH-2.5 U-RH-3A U-RX-3 U-RX-5 U-MX-2x U-MS-2x U-MX-2 U-MS-2 U-MX-3 U-MS-3 U-MX-5 U-MS-5	APPLICABLE USE LIMITATIONS
--------------	--	--	----------------------------

ACCESSORY TO PRIMARY NONRESIDENTIAL USES USE CLASSIFICATION


Accessory to Primary Nonresidential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts								\$11.7; §11.10.1
	Amusement Devices Accessory to Eating/Drinking Establishments, College/University and Theater Uses	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.7; §11.10.2
	Automobile Rental Services Accessory to Certain Retail Uses*	NP	NP	NP	Not Applicable - See permitted Primary Uses	NP	NP	Not Applicable - See permitted Primary Uses	Not Applicable - See Permitted Primary Uses	\$11.7; §11.10.3
	Book or gift store; media recording and production facilities accessory to public libraries, museums, places of religious assembly, colleges or universities	L	L	L	Not Applicable - See permitted Primary Uses	L	L	L	L	\$11.7; §11.10.4
	Car Wash Bay Accessory to Automobile Services	NP	NP	NP	L-ZP	NP	NP	L-ZP	NP	\$11.7; §11.10.5
	College Accessory to a Place for Religious Assembly	L	L	L	Not Applicable - See permitted Primary Uses	L	Not Applicable - See permitted Primary Uses			\$11.7; §11.10.6
	Conference Facilities Accessory to Hotel Use	NP	NP	NP	L	NP	NP	L	L	\$11.7; §11.10.7
	Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses*	NP	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	\$11.7; §11.10.8
	Emergency Vehicle Access Point	NP	NP	NP	NP	NP	NP	NP	NP	
	Garden*	L	L	L	L	L	L	L	L	\$11.7; §11.10.10
	Keeping of Animals	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZP/L-ZPIN	L/L-ZP/L-ZPIN	\$11.7; §11.10.11
	Nonresidential Uses in Existing Business Structures In Residential Zones - Accessory Uses	L	L	L	Not Applicable - See permitted Primary Uses	Not Applicable				\$11.7; §11.4.3
	Occasional Sales, Services Accessory to Places of Religious Assembly*	L	L	L	L	L	L	L	L	\$11.7; §11.10.12
	Outdoor Eating and Serving Area Accessory to Eating/Drinking Establishment Use*	NP	NP	NP	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	\$11.7; §11.10.13

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review
ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	APPLICABLE USE LIMITATIONS							
		U-SU-A U-SU-A1 U-SU-A2 U-SU-B U-SU-B1 U-SU-B2 U-SU-C U-SU-C1 U-SU-C2 U-SU-E U-SU-E1 U-SU-H U-SU-H1	U-TU-B U-TU-B2 U-TU-C	U-RH-2.5 U-RH-3A	U-RX-3 U-RX-5	U-MX-2x U-MS-2x	U-MX-2 U-MS-2	U-MX-3 U-MS-3	U-MS-5
Accessory to Primary Nonresidential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Outdoor Entertainment Accessory to an Eating/Drinking Establishment Use*	NP	NP	NP	L-ZPIN/ZPSE	NP	NP	L-ZPIN/ZPSE	L-ZPIN/ZPSE §11.7; §11.10.14
	Outdoor Retail Sale and Display*	NP	NP	NP	L-ZP/ZPSE	NP	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE §11.7; §11.10.15
	Outdoor Storage, General*	NP	NP	NP	NP	NP	NP	NP	NP
	Outdoor Storage, Limited*	NP	NP	NP	NP	L	L	L	L §11.7; §11.10.17
	Rental or Sales of Adult Material Accessory to a Permitted Bookstore Retail Sales Use	NP	NP	NP	L	L	L	L	L §11.7; §11.10.18
TEMPORARY USE CLASSIFICATION									
Temporary Uses (Parking is Not Required for Temporary Uses Unless Specifically Stated in this Table or in an Applicable Use Limitations)	Unlisted Temporary Uses	L - Applicable to all Zone Districts							§11.11.1
	Ambulance Service - Temporary	NP	NP	NP	L-ZP	Not Applicable - See Permitted Primary Uses			§11.11.2
	Amusement / Entertainment - Temporary*	NP	NP	NP	NP	NP	NP	NP	NP
	Bazaar, Carnival, Circus or Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP §11.11.4
	Building or yard for construction materials*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP §11.11.5
	Concrete, Asphalt, and Rock Crushing Facility*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP §11.11.6
	Fence for Demolition or Construction Work	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP §11.11.7
	Health Care Center	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP §11.11.8
	Noncommercial Concrete Batching Plant*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP §11.11.9
	Outdoor Retail Sales - Pedestrian / Transit Mall*	NP	NP	NP	NP	NP	NP	NP	
	Outdoor Retail Sales*	NP	NP	NP	L-ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP	NP §11.11.11
	Outdoor Sales, Seasonal*	NP	NP	NP	L-ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP	L-ZP §11.11.12
	Parking Lot Designated for a Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP §11.11.13
	Retail Food Establishment, Mobile*	NP	NP	NP	NP	NP	NP	NP	
	Temporary Construction Office	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP §11.11.15
	Temporary Office - Real Estate Sales	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP §11.11.16
	Temporary Tiny Home Villages	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	L-ZPCIM §11.11.17
	Tent for Religious Services	NP	NP	NP	NP	NP	NP	NP	



ARTICLE 6. GENERAL URBAN (G-) NEIGHBORHOOD CONTEXT

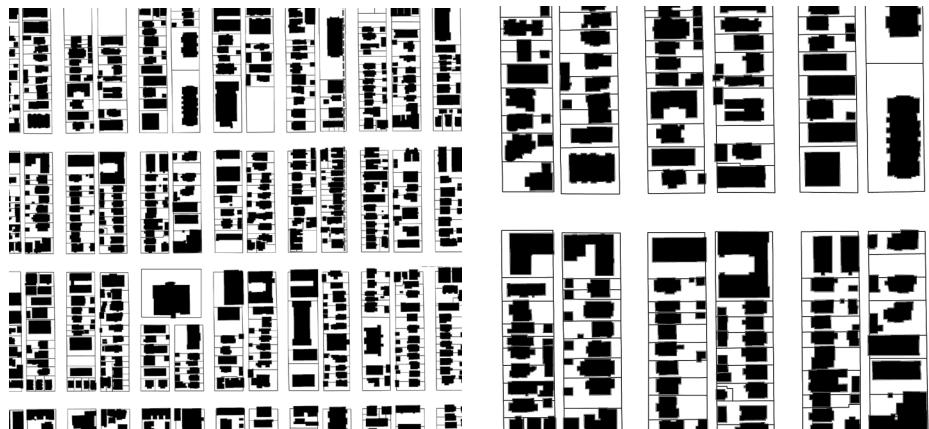

URBAN HOUSE

HEIGHT	G-RH-3	G-MU-3 G-RO-3	G-MU-5 G-RO-5	G-MU-8, -12, -20
A Stories (max)	see below	3	3	3
A Feet (max)	see below	30'*	30'*	30''*
Stories, front 80% / rear 20% of zone lot depth (max)	3/1	na	na	na
Feet, front 80% / rear 20% of zone lot depth (max)	30''/19'	na	na	na
B Side Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)	25'	na	na	na
Upper Story Setback, for Low-slope Roof, Above 25', Side Interior and Side Street (min)	15'	na	na	na

*1' for every 5' increase in lot width over 50' up to a maximum height of 35'

SITING	G-RH-3	G-MU-3 G-RO-3	G-MU-5 G-RO-5	G-MU-8, -12, -20
ZONE LOT				
Zone Lot Size (min)	3,000 sf	3,000 sf	3,000 sf	3,000 sf
C Zone Lot Width (min)	25'	25'	25'	25'
Primary Street, block sensitive setback required	yes	yes	na	na
SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH				
	30' or Less	Greater than 30' and up to 40'	Greater than 40' and less than 75'	75' or Greater
D Primary Street, where block sensitive setback does not apply (min)	20'	20'	20'	20'
E Side Street (min)	3'	5'	5'	5'
F Side Interior (min)	3'	3' min one side/10' min combined	5'	7.5'
G Rear, alley/no alley	12'/20'	12'/20'	12'/20'	12'/20'
Building Coverage per Zone Lot, including all accessory structures (max)	50%	50%	50%	50%
PARKING BY ZONE LOT WIDTH				
Parking and Drive Lot Coverage in Primary Street Setback/Overall (max)	2 Spaces and 320 sf	2 Spaces and 320 sf	33%	33%
Vehicle Access	From Alley; or Street access allowed when no Alley present (See Sec. 6.3.7.6)			
H DETACHED ACCESSORY STRUCTURES	See Sec. 6.3.4			
DESIGN ELEMENTS	All G-RH, -MU, -RO			
BUILDING CONFIGURATION				
Attached Garage Allowed	(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use. (2) May follow the Detached Garage building form Side Street, Side Interior and Rear setbacks			
Primary Street Facing Attached Garage Door Width in first 50% of lot depth(max)	35% of the entire width of the Primary Street facing facade of the primary structure or 16'; whichever is greater			
STREET LEVEL ACTIVATION				
I Pedestrian Access, Primary Street	Entry Feature			
USES	All G-RH, -MU, -RO			
	For Primary Structures constructed on or before April 27, 2017, all permitted Primary Uses shall be allowed within this building form; however, for Primary Structures constructed after April 27, 2017, Primary Uses shall be limited to Single Unit Dwelling and permitted Group Living-Congregate Living, Residential Care , and Nonresidential uses. See Division 6.4 Uses and Parking			

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

DUPLEX

HEIGHT		G-RH-3	G-MU-3 G-RO-3	G-MU-5 G-RO-5	G-MU-8, -12, -20
A Stories (max)	see below	3	3	3	
A Feet (max)	see below	30'*	30'*	30'*	
Stories, front 80% / rear 20% of zone lot depth (max)	3/1	na	na	na	
Feet, front 80% / rear 20% of zone lot depth (max)	30'*/19'	na	na	na	
B Side Wall Height, for Pitched Roof, within 15' of Side Interior and Side Street (max)	25'	na	na	na	
Upper Story Setback, for Low-slope Roof, Above 25': Side Street and Side Interior (min)	15'	na	na	na	

*1' for every 5' increase in lot width over 50' up to a maximum height of 35'

SITING		G-RH-3	G-MU-3 G-RO-3	G-MU-5 G-RO-5	G-MU-8, -12, -20
ZONE LOT					
Zone Lot Size (min)		3,000 sf	3,000 sf	3,000 sf	3,000 sf
C Zone Lot Width (min)		25'	25'	25'	25'
Primary Street, block sensitive setback required		yes	yes	na	na

		All G-RH, -MU, -RO			
SETBACKS AND BUILDING COVERAGE BY ZONE LOT WIDTH		30' or Less	Greater than 30' and up to 40'	Greater than 40' and less than 75'	75' or Greater
D Primary Street, where block sensitive setback does not apply (min)		20'	20'	20'	20'
E Side Street (min)		3'	5'	5'	5'
F Side Interior (min)		3'	3' min one side/10' min combined	5'	7.5'
G Rear, alley/no alley (min)		12'/20'	12'/20'	12'/20'	12'/20'
Building Coverage per Zone Lot, including all accessory structures (max)		50%	50%	50%	50%
PARKING BY ZONE LOT WIDTH					
Parking and Drive Lot Coverage in Primary Street Setback (max)		50%	50%	50%	50%
Vehicle Access		From Alley; or Street access allowed when no Alley present (See Sec. 6.3.7.6)			
H DETACHED ACCESSORY STRUCTURES		See Sec. 6.3.4			

DESIGN ELEMENTS		All G-RH, -MU, -RO Districts
BUILDING CONFIGURATION		
Attached Garage Allowed		(1) Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use. (2) May follow the Detached Garage building form Side Street, Side Interior and Rear setbacks
Primary Street Facing Attached Garage Door Width in first 50% of lot depth(max)		35% of the entire width of the Primary Street facing facade of the primary structure or 16', whichever is greater
STREET LEVEL ACTIVATION		
I Pedestrian Access, Primary Street		Entry Feature
USES		All G-RH, -MU, -RO Districts
For Primary Structures constructed on or before April 27, 2017, all permitted Primary Uses shall be allowed within this building form; however, for Primary Structures constructed after April 27, 2017, Primary Uses shall be limited to Two Unit Dwelling and permitted <u>Group Living</u> , <u>Congregate Living</u> , <u>Residential Care</u> , and Nonresidential uses. See Division 6.4 Uses and Parking		

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

APARTMENT

HEIGHT	G-RO-3					
	G-MU-3	G-MU-5	G-RO-5	G-MU-8	G-MU-12	G-MU-20
A Stories (max)	3	5	5	8	12	20
A Feet (max)	40'	65'	65'	100'	140'	230'
Feet, within 175' of Protected District (max)	na	na	na	75'	75'	75'

SITING ZONE LOT	G-RO-3					
	G-MU-3	G-MU-5	G-RO-5	G-MU-8	G-MU-12	G-MU-20
Zone Lot Size (min)	6,000 sf	6,000 sf	6,000 sf	6,000 sf	6,000 sf	6,000 sf
Zone Lot Width (min)	50'	50'	50'	50'	50'	50'
REQUIRED BUILD-TO						
B Primary Street (min % within min/max)	60% 10'/20'	60% 10'/20'	60% 10'/20'	60% 10'/20'	60% 10'/20'	60% 10'/20'
SETBACKS						
Primary Street, block sensitive setback required	yes	na	na	na	na	na
C Primary Street, where block sensitive does not apply (min)	10'	10'	10'	10'	10'	10'
D Side Street (min)	5'	5'	5'	5'	5'	5'
E Side Interior (min)	7.5'	7.5'	7.5'	7.5'	7.5'	7.5'
Side Interior, adjacent to Protected District (min)	10'	10'	10'	10'	10'	10'
F Rear, alley/no alley (min)	10'/20'	10'/20'	10'/20'	10'/20'	10'/20'	10'/20'
PARKING						
Surface Parking between building and Primary Street/Side Street	Not Allowed/Allowed					
Vehicle Access, all other permitted uses	Shall be determined as part of Site Development Plan Review					

DESIGN ELEMENTS BUILDING CONFIGURATION	G-RO-3					
	G-MU-3	G-MU-5	G-RO-5	G-MU-8	G-MU-12	G-MU-20
Dwelling Unit Configuration	Structure may contain Side-by-Side Dwelling Units Residential Only Structure: Side-by-Side Dwelling Units shall not exceed 50% of the Structure's GFA					
Street-facing Garage Door Width per Primary Structure (max)	20'	20'	20'	20'	20'	20'
Upper Story Setback Above 40', Side Interior (min)	na	15'	na	na	na	na
G Upper Story Setback Above 51', Side Interior (min)	na	na	15'	15'	15'	15'
H Upper Story Setback Above 75', Rear, alley/Rear, no alley and Side Interior (min)	na	na	na	20'/30'	20'/30'	20'/30'
I Upper Story Setback Above 27', adjacent to Protected District: Side Interior (min)	25'	25'	25'	25'	25'	25'
J Upper Story Setback Above 51', adjacent to Protected District: Side Interior (min)	na	40'	40'	40'	40'	40'
Upper Story Setback Above 40', adjacent to Protected District: Rear, alley/Rear, no alley (min)	na	30'/40'	30'/40'	30'/40'	30'/40'	30'/40'
STREET LEVEL ACTIVATION						
K Transparency, Primary Street (min)	40%	40%	40%	40%	40%	40%
L Transparency, Side Street (min)	25%	25%	25%	25%	25%	25%
M Pedestrian Access, Primary Street	Entrance					

USES	All G-MU and G-RO
Primary Uses shall be limited to Multi Unit Dwelling (3+) and permitted Group Living Congregate Living , Residential Care , and Nonresidential uses. See Division 6.4 Uses and Parking	

See Sections 6.3.5 - 6.3.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

6.4.3.2 Permitted, Limited, Not Permitted

A. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations.

B. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

C. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

6.4.3.3 Zoning Procedure

A. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

B. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

C. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

D. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

E. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

6.4.3.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type. For

SECTION 6.4.4 DISTRICT SPECIFIC STANDARDS

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)	G-RH-3	G-MU-3 G-MU-5 G-MU-8	12 G-MU- 20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	APPLICABLE USE LIMITATIONS
RESIDENTIAL PRIMARY USE CLASSIFICATION									
Household Living	Dwelling, Single Unit •Vehicle: 5 or fewer adults; No Parking Requirements. •Vehicle: 6 or more adults: 1/unit •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.2.6
	Dwelling, Two Unit •Vehicle: 1/unit •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.2.6
	Dwelling, Multi-Unit •Vehicle: 1/unit •Bicycle: 1/ 4 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.2.6
	Dwelling, Live / Work •Vehicle: 1/unit •Bicycle: 1/ 4 units (80/20)	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.2.4; §11.2.6
Residential Care	<u>Residential Care, Type 1</u> •Vehicle: .5/1,000 sf GFA •Bicycle: No requirement	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>\$11.2.7; \$11.2.8</u>
	<u>Residential Care, Type 2</u> •Vehicle: .5/1,000 sf GFA •Bicycle: No requirement	<u>L-ZPCIM</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>\$11.2.7; \$11.2.9</u>
	<u>Residential Care, Type 3</u> •Vehicle: .5/1,000 sf GFA •Bicycle: No requirement	<u>NP</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>\$11.2.7; \$11.2.10</u>
	<u>Residential Care, Type 4</u> •Vehicle: .5/1,000 sf GFA •Bicycle: No requirement	<u>NP</u>	<u>G-MU-3, -5: NP G-MU-8: L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>\$11.2.7; \$11.2.11</u>
Congregate Living	<u>All Types</u> •Vehicle: 1/1,000 sf GFA •Bicycle: 1/20,000 sf GFA	<u>NP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)									APPLICABLE USE LIMITATIONS
		G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU-12 G-MU-20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5		
Group Living	Assisted Living Facility • Vehicle: .75/unit • Bicycle: No requirement	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Community Corrections Facility	NP	NP	NP	NP	NP	NP	NP	NP	
	Nursing Home; Hospice • Vehicle: .75/unit • Bicycle: No requirement	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Residence for Older Adults • Vehicle: .75/unit • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Residential Care Use; Small or Large • Vehicle: .0125/unit • Bicycle: No requirement	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§ 11.2.9
	Rooming and Boarding House • Vehicle - MS only: 2 / 1,000 sf GFA • Vehicle: 3.75 / 1,000 sf GFA • Bicycle: No requirement	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Shelter for the Homeless • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	§ 11.2.11
	Student Housing • Vehicle: 1/unit • Bicycle: 1 / 4 units (80/20)	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION

Basic Utilities	Utility, Major Impact* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZPSE	§ 11.3.1							
	Utility, Minor Impact* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZP	§ 11.3.2							

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)									APPLICABLE USE LIMITATIONS
		G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU-12 G-MU-20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5		
Community/ Public Services	Community Center • Vehicle: .5 / 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.3
	Day Care Center • Vehicle: 1/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Facility, Neighborhood • Vehicle: 1.875/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (20/80)	P-ZP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Processing Center • Vehicle: 1/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (20/80)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Public Safety Facility • Vehicle: 1/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.5
	Hospital	NP	NP	NP	NP	NP	NP	NP	NP	
Cultural/Special Purpose/Public Parks & Open Space	Correctional Institution	NP	NP	NP	NP	NP	NP	NP	NP	
	Cemetery*	NP	NP	NP	NP	NP	NP	NP	NP	
	Library • Vehicle: 1/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Museum • Vehicle: 1/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	City Park*	NP	NP	NP	NP	NP	NP	NP	NP	
Education	Open Space - Conservation* • No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Elementary or Secondary School • Vehicle: 1/1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
Education	University or College • Vehicle: 1/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	NP	L-ZP	L-ZP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8; § 11.3.9
	Vocational or Professional School • Vehicle: 1/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)									APPLICABLE USE LIMITATIONS
		G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU-12 G-MU-20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5		
Public and Religious Assembly	All Types • Vehicle: .5/ 1,000 sf GFA • Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§ 11.3.10	
COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION										
Adult Business	All Types	NP	NP	NP	NP	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.
Arts, Recreation and Entertainment	Arts, Recreation and Entertainment Services, Indoor • Vehicle - Artist Studio: 0.3/1000 sf GFA • Vehicle - All Others: 1.875/ 1,000 sf GFA • Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	L-ZP	P-ZP	P-ZP	P-ZP	§ 11.4.2	
	Arts, Recreation and Entertainment Services, Outdoor*	NP	NP	NP	NP	L-ZPSE	L-ZPSE	L-ZPSE	§ 11.4.3	
	Event Space with Alternate Parking and Loading* • Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP		
	Sports and/or Entertainment Arena or Stadium*	NP	NP	NP	NP	NP	NP	NP		
Nonresidential Uses in Existing Business Structures In Residential Zones (All Uses Shall Be Parked According to the Parking Requirement Stated in this Use Table for the Specific Nonresidential Use)		L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	Not Applicable			§ 11.4.6	
Parking of Vehicles	Parking, Garage • No Parking Requirements	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP		
	Parking, Surface* • No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	NP	NP	NP	§ 11.4.8	
Eating & Drinking Establishments	All Types • Vehicle - MS only: 2 / 1,000 sf GFA • Vehicle: 3.75/ 1,000 sf GFA • Bicycle: 1/3,000 sf GFA (0/100)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	§ 11.4.9	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	G-RH-3	APPLICABLE USE LIMITATIONS							
			G-MU-3 G-MU-5 G-MU-8	G-MU-12 G-MU-20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5		
Lodging Accommodations	Bed and Breakfast Lodging •Vehicle: 1/guest room or unit •Bicycle: 1/ 10,000 sf GFA (60/40)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Lodging Accommodations, All Others •Vehicle: 1/ guest room or unit •Bicycle: 1/ 10,000 sf GFA (60/40)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
Office	Dental / Medical Office or Clinic •Vehicle: 1.875/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (60/40)	NP	NP	NP	L-ZPIN	L-ZP	L-ZP	L-ZP	§ 11.4.10	
	Office, All Others •Vehicle: 1.875/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (60/40)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Animal Sales and Services, Household Pets Only •Vehicle: 1.875/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.4.12	
	Animal Sales and Services, All Others	NP	NP	NP	NP	NP	NP	NP	NP	
	Food Sales or Market •Vehicle: 1.875/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	L-ZP	P-ZP	P-ZP	§ 11.4.14	
	Pawn Shop	NP	NP	NP	NP	NP	NP	NP	NP	
	Retail Sales, Service & Repair -- Outdoor*	NP	NP	NP	NP	NP	NP	NP	NP	
	Retail Sales, Service & Repair - Firearms Sales •Vehicle: 1.875/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	NP	NP	P-ZP		
	Retail Sales, Service & Repair, All Others •Vehicle: 1.875/ 1,000 sf GFA •Bicycle: 1/10,000 sf GFA (20/80)	NP	NP	NP	NP	P-ZP	P-ZP	P-ZP		

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)	G-RH-3	G-MU-						G-MS-3 G-MS-5	APPLICABLE USE LIMITATIONS
			G-MU-3 G-MU-5 G-MU-8	12	G-MU-20 G-RO-5	G-RO-3 G-RX-5	G-RX-3 G-RX-5	G-MX-3		
Vehicle / Equipment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	P-ZP	P-ZP	
	Automobile Services, Light • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	NP	L-ZP	L-ZP	§ 11.4.18; § 11.4.19
	Automobile Services, Heavy Vehicle: .5 / 1,000 sf GFA Bicycle: No requirement	NP	NP	NP	NP	NP	NP	NP	L-ZP/ZPSE	§ 11.4.18; § 11.4.20
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer* • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP		§ 11.4.21
	Heavy Vehicle/ Equipment Sales, Rentals & Service*	NP	NP	NP	NP	NP	NP	NP	NP	

INDUSTRIAL, MANUFACTURING & WHOLESALE PRIMARY USE CLASSIFICATION

Communications and Information	Antennas Not Attached to a Tower* • No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP		§ 11.5.2
	Communication Services • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	P-ZP	L-ZP/ZPSE	G-MS-3: L-ZP/ZPSE G-MS-5: P-ZP		§ 11.5.1
	Telecommunications Towers* • No Parking Requirements	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE		§ 11.5.2
	Telecommunications Tower - Alternative Structure* • No Parking Requirements	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN		§ 11.5.2
	Telecommunication Facilities -- All Others* • No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN		§ 11.5.2
Industrial Services	Contractors, Special Trade - General • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	L-ZP		§ 11.5.3
	Contractors, Special Trade - Heavy/ Contractor Yard*	NP	NP	NP	NP	NP	NP	NP		
	Food Preparation and Sales, Commercial • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	L-ZP		§ 11.5.5
	Laboratory, Research, Development and Technological Services	NP	NP	NP	NP	NP	L-ZP	L-ZP		§ 11.5.6
	Service/Repair, Commercial • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	L-ZP		§ 11.5.7

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)									APPLICABLE USE LIMITATIONS
		G-RH-3	G-MU-3 G-MU-5 G-MU-8	G-MU-12 G-MU-20	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5		
Manufacturing and Production	Manufacturing, Fabrication & Assembly -- Custom • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZPIN	L-ZP	L-ZP	§ 11.5.8	
	Manufacturing, Fabrication & Assembly -- General	NP	NP	NP	NP	NP	NP	NP		
	Manufacturing, Fabrication & Assembly -- Heavy	NP	NP	NP	NP	NP	NP	NP		
Mining & Extraction and Energy Producing Systems	Oil, Gas -- Production, Drilling*	NP	NP	NP	NP	NP	NP	NP		
	Sand or Gravel Quarry*	NP	NP	NP	NP	NP	NP	NP		
	Wind Energy Conversion Systems* • No Parking Requirement	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	§ 11.5.13	
Transportation Facilities	Airport*	NP	NP	NP	NP	NP	NP	NP		
	Helipad, Heliport, Heliport* No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZP	L-ZP	§ 11.5.14	
	Railroad Facilities*	NP	NP	NP	NP	NP	NP	NP		
	Railway Right-of-Way* No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP		
	Terminal, Station or Service Facility for Passenger Transit System • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	P-ZP	§ 11.5.16	
	Terminal, Freight, Air Courier Services	NP	NP	NP	NP	NP	NP	NP		
Waste Related Services	Automobile Parts Recycling Business*	NP	NP	NP	NP	NP	NP	NP		
	Junkyard*	NP	NP	NP	NP	NP	NP	NP		
	Recycling Center	NP	NP	NP	NP	NP	NP	NP		
	Recycling Collection Station	NP	NP	NP	NP	NP	NP	NP		
	Recycling Plant, Scrap Processor	NP	NP	NP	NP	NP	NP	NP		
	Solid Waste Facility	NP	NP	NP	NP	NP	NP	NP		
Wholesale, Storage, Warehouse & Distribution	Automobile Towing Service Storage Yard*	NP	NP	NP	NP	NP	NP	NP		
	Mini-storage Facility • Vehicle: 0.1 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	NP	§ 11.5.23	
	Vehicle Storage, Commercial*	NP	NP	NP	NP	NP	NP	NP		
	Wholesale Trade or Storage, General	NP	NP	NP	NP	NP	NP	NP		
	Wholesale Trade or Storage, Light • Vehicle: .5 / 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	§ 11.5.26	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility / % Required Spaces in Fixed Facility)	G-MU- G-MU-3 12 G-MU-5 G-MU- G-MU-8 20 G-RH-3	G-RO-3 G-RO-5	G-RX-3 G-RX-5	G-MX-3	G-MS-3 G-MS-5	APPLICABLE USE LIMITATIONS
--------------	--	--	------------------	------------------	--------	------------------	----------------------------

AGRICULTURE PRIMARY USE CLASSIFICATION

Agriculture	Aquaculture*	NP	NP	NP	NP	NP	NP	
	Garden, Urban* • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.2
	Husbandry, Animal*	NP	NP	NP	NP	NP	NP	
	Husbandry, Plant*	NP	NP	NP	NP	NP	NP	
	Plant Nursery • Vehicle: .5/ 1,000 sf GFA • Bicycle: No requirement	NP	NP	NP	NP	L-ZP	L-ZP	§ 11.6.5

ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION


(Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts							§ 11.7
	Accessory Dwelling Unit	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.7, § 11.8.2
	Domestic Employee	L	L	L	L	L	L	L	§ 11.7.1; § 11.8.3
	Garden*	L	L	L	L	L	L	L	§ 11.7, § 11.8.4
	Keeping of Household Animals*	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	§ 11.7; § 11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	L	L	L	L	L	L	§ 11.7; § 10.9
	Kennel or Exercise Run*	L	L	L	L	L	L	L	§ 11.7; § 11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	NP	L-ZP	L-ZP	L-ZP	L-ZP	Not Applicable - See Permitted Primary Uses		§ 11.7; § 11.8.7
	Outdoor Storage, Residential*	L	L	L	L	L	L	L	§ 11.7; § 11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.7; § 11.8.9
	Short-term Rental	L	L	L	L	L	L	L	§ 11.7; § 11.8.10
	Vehicle Storage, Repair and Maintenance*	L	L	L	L	L	L	L	§ 11.7; § 10.9.
	Wind Energy Conversion Systems*	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	Not Applicable - See Permitted Primary Uses		§ 11.7; § 11.5.13
	Yard or Garage Sales*	L	L	L	L	L	L	L	§ 11.7; § 11.8.11

HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Home Occupations (Parking is Not Required for Home Occupations Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Child Care Home, Large	L-ZPIN	§ 11.9; § 11.9.3						
	All Other Types	L-ZP	§ 11.9; § 11.9.4						
	Unlisted Home Occupations	L-ZPIN	§ 11.9; § 11.9.5						



ARTICLE 7. URBAN CENTER (C-) NEIGHBORHOOD CONTEXT

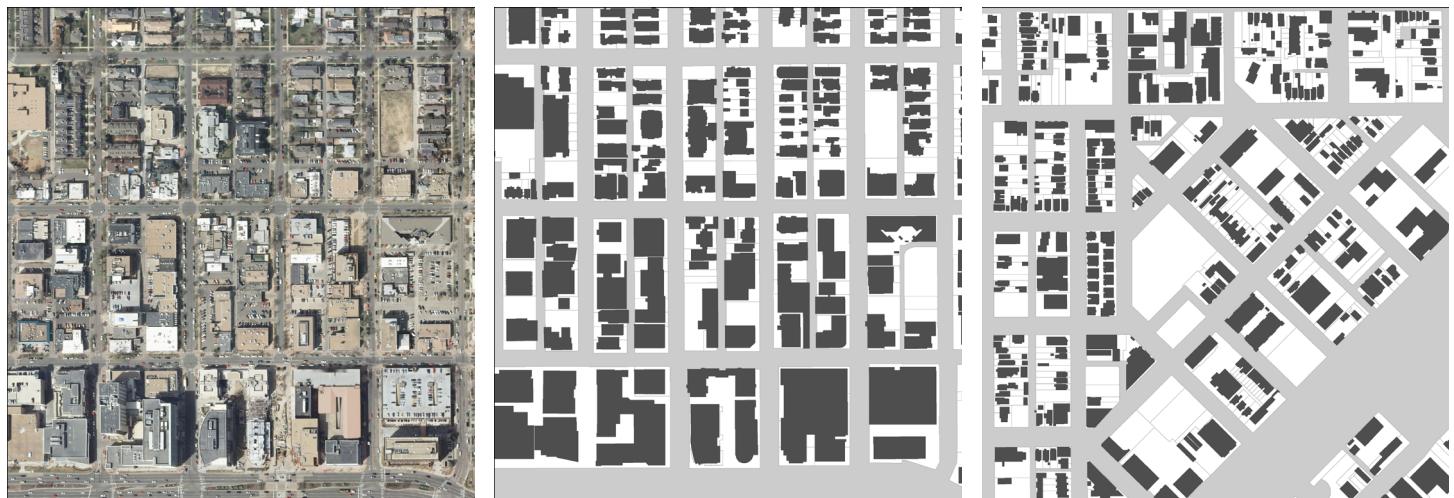

7.4.3.2 Permitted, Limited, Not Permitted

A. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations.

B. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

C. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

7.4.3.3 Zoning Procedure

A. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

B. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

C. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

D. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

E. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

7.4.3.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type. For

SECTION 7.4.4 DISTRICT SPECIFIC STANDARDS

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	C-MX-3 C-MX-5 C-MX-8 C-RX-5 C-RX-8 C-RX-12	C-MX-12 C-MX-16 C-MX-20	C-MS-5 C-MS-8 C-MS-12	C-CCN-3 C-CCN-4 C-CCN-5 C-CCN-7 C-CCN-8 C-CCN-12	APPLICABLE USE LIMITATIONS
--------------	--	---	-------------------------------	-----------------------------	---	----------------------------

RESIDENTIAL PRIMARY USE CLASSIFICATION

Household Living	Dwelling, Single Unit •Vehicle: 5 or fewer adults: No Parking Requirements. •Vehicle: CCN districts only - 6 or more unrelated adults: 1 •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.5; §11.2.6
	Dwelling, Two Unit •Vehicle - CCN districts only:1/unit •Vehicle: 0.75/unit •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.5; §11.2.6
	Dwelling, Multi-Unit •Vehicle - CCN districts only:1/unit •Vehicle: 0.75/unit •Bicycle: 1/ 2 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.5; §11.2.6
	Dwelling, Live / Work •Vehicle - CCN districts only:1/unit •Vehicle: 0.75/unit •Bicycle: 1/ 2 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.4; §11.2.5; §11.2.6
Residential Care	<u>Residential Care, Type 1</u> •Vehicle: .25/1,000 sf GFA •Bicycle: No requirement	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>§11.2.7; §11.2.8</u>
	<u>Residential Care, Type 2</u> •Vehicle: .25/1,000 sf GFA •Bicycle: No requirement	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>§11.2.7; §11.2.9</u>
	<u>Residential Care, Type 3</u> •Vehicle: .25/1,000 sf GFA •Bicycle: No requirement	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>§11.2.7; §11.2.10</u>
	<u>Residential Care, Type 4</u> •Vehicle: .25/1,000 sf GFA •Bicycle: No requirement	<u>C-RX-5: NP C-RX-8, -12: L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>§11.2.7; §11.2.11</u>
Congregate Living	<u>All Types</u> •Vehicle: .5/1,000 sf GFA •Bicycle: 1/20,000 sf GFA	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	C-MX-3 C-MX-5 C-MX-8 C-RX-5 C-RX-8 C-RX-12 C-MX-12 C-MX-16 C-MX-20 C-MS-5 C-MS-8 C-MS-12 C-CCN-3 C-CCN-4 C-CCN-5 C-CCN-7 C-CCN-8 C-CCN-12				APPLICABLE USE LIMITATIONS
Group Living	Assisted Living Facility •Vehicle: .75/unit •Bicycle: 1/10 units (50/50)	P-ZP	P-ZP	P-ZP	P-ZP	
	Community Corrections Facility	NP	NP	NP	NP	
	Nursing Home, Hospice •Vehicle - CCN districts only: 1/unit •Vehicle: .75/unit •Bicycle: 1/10 units (50/50)	P-ZP	P-ZP	P-ZP	P-ZP	
	Residence for Older Adults •Vehicle - CCN districts only: 1/unit •Vehicle: .75/unit •Bicycle: 1/10 units (50/50)	P-ZP	P-ZP	P-ZP	P-ZP	
	Residential Care Use, Small or Large •Vehicle: No requirement •Bicycle: 1/10 units (50/50)	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.2.9
	Romming and Boarding House •Vehicle - MS only: 2/ 1,000 sf GFA •Vehicle: 2.5/ 1,000 sf GFA •Bicycle: No requirement	P-ZP	P-ZP	P-ZP	NP	
	Shelter for the Homeless •Vehicle: No requirement •Bicycle: No requirement	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	§ 11.2.11
CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION	Student Housing •Vehicle - CCN districts only: 1/unit •Vehicle: 0.75/unit •Bicycle: 1/ 2 units (80/20)	P-ZP	P-ZP	P-ZP	P-ZP	
	Utility, Major Impact* •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	§ 11.3.1
	Utility, Minor Impact* •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.2
	Community Center •Vehicle: No requirement •Bicycle: 1/10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.3
Community/ Public Services	Day Care Center •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Facility, Neighborhood •Vehicle - CCN districts only: 2.5/1,000 sf GFA •Vehicle: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA (20/80)	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	C-MX-3 C-MX-5 C-MX-8 C-RX-5 C-RX-8 C-RX-12 C-MX-12 C-MX-16 C-MX-20 C-MS-5 C-MS-8 C-MS-12 C-CCN-3 C-CCN-4 C-CCN-5 C-CCN-7 C-CCN-8 C-CCN-12				APPLICABLE USE LIMITATIONS
Community/ Public Services	Postal Processing Center •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA(20/80)	NP	P-ZP	P-ZP	NP	
	Public Safety Facility •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.5
	Hospital	NP	NP	NP	NP	
	Correctional Institution	NP	NP	NP	NP	
Cultural/Special Purpose/Public Parks & Open Space	Cemetery*	NP	NP	NP	NP	
	Library •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	
	Museum •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	NP	P-ZP	P-ZP	P-ZP	
	City Park*	NP	NP	NP	NP	
	Open Space - Conservation* •No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	
	Elementary or Secondary School •Vehicle: 1/1,000 sf GFA •Bicycle: 1/10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
Education	University or College •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8; §11.3.9
	Vocational or Professional School •Vehicle: 1/ 1,000 sf GFA •Bicycle: 1/ 10,000 sf GFA (0/100)	NP	L-ZP	L-ZP	L-ZP	§ 11.3.8
	All Types •Vehicle: No requirement •Bicycle: 1/10,000 sf GFA (0/100)	L-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.10
COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION						
Adult Business	All Types	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	C-MX-3 C-MX-5 C-MX-8 C-RX-5 C-RX-8 C-RX-12 C-MX-12 C-MX-16 C-MX-20 C-MS-5 C-MS-8 C-MS-12 C-CCN-3 C-CCN-4 C-CCN-5 C-CCN-7 C-CCN-8 C-CCN-12				APPLICABLE USE LIMITATIONS
Arts, Recreation & Entertainment	Arts, Recreation and Entertainment Services, Indoor •Vehicle - Artist Studio: 0.3/1000 sf GFA •Vehicle - CCN districts only: 2.5/1,000 sf GFA •Vehicle - All Others: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA (20/80)	P-ZP	P-ZP	P-ZP	P-ZP	
	Arts, Recreation and Entertainment Services, Outdoor* •Vehicle - CCN districts only: 2.5/1,000 sf GFA •Vehicle: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA(20/80)	L-ZPIN	L-ZPSE	L-ZPSE	L-ZPIN	§ 11.4.3
	Event Space with Alternate Parking and Loading* •Vehicle: No requirement •Bicycle: No requirement	NP	NP	NP	NP	
	Sports and/or Entertainment Arena or Stadium*	NP	NP	NP	NP	
Nonresidential Uses in Existing Business Structures In Residential Zones (All Uses Shall Be Parked According to the Parking Requirement Stated in this Use Table for the Specific Nonresidential Use)		L-ZPIN	Not Applicable	Not Applicable	Not Applicable	§11.4.6
Parking of Vehicles	Parking, Garage •No Parking Requirements	P-ZP	P-ZP	P-ZP	L-ZP	§7.3.5.2
	Parking, Surface*	NP	NP	NP	NP	
Eating & Drinking Establishments	All Types •Vehicle - MS only: 2/ 1,000 sf GFA •Vehicle: 2.5/ 1,000 sf GFA •Bicycle: 1/1,500 sf GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	
Lodging Accommodations	Bed and Breakfast Lodging •Vehicle: 0.875/guest room or unit •Bicycle: 1/ 7,500 sf GFA (60/40)	P-ZP	P-ZP	P-ZP	P-ZP	
	Lodging Accommodations, All Others •Vehicle: 0.5/ guest room or unit •Bicycle: 1/ 7,500 sf GFA (60/40)	P-ZP	P-ZP	P-ZP	P-ZP	
Office	Dental / Medical Office or Clinic •Vehicle - CCN districts only: 2/1,000 sf GFA •Vehicle: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA (60/40)	L-ZP	L-ZP	L-ZP	L-ZP	§11.4.10
	Office, All Others •Vehicle - CCN districts only: 2/1,000 sf GFA •Vehicle: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA (60/40)	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	C-MX-3 C-MX-5 C-MX-8 C-RX-5 C-RX-8 C-RX-12 C-MX-12 C-MX-16 C-MX-20 C-MS-5 C-MS-8 C-MS-12 C-CCN-3 C-CCN-4 C-CCN-5 C-CCN-7 C-CCN-8 C-CCN-12				APPLICABLE USE LIMITATIONS
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Animal Sales and Services, Household Pets Only •Vehicle - CCN districts only: 2.5/1,000 sf GFA •Vehicle: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA(20/80)	L-ZP	L-ZP	L-ZP	L-ZP	§11.4.12
	Animal Sales and Services, All Others	NP	NP	NP	NP	
	Food Sales or Market •Vehicle - CCN districts only: 2.5/1,000 sf GFA •Vehicle: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA (20/80)	L-ZP	P-ZP	P-ZP	P-ZP	§11.4.14
	Pawn Shop	NP	NP	NP	NP	
	Retail Sales, Service & Repair -- Outdoor*	NP	NP	NP	NP	
	Retail Sales, Service & Repair - Firearms Sales •Vehicle: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA(20/80)	NP	NP	P-ZP	NP	
	Retail Sales, Service & Repair, All Others •Vehicle - CCN districts only: 2.5/1,000 sf GFA •Vehicle: 1.25/ 1,000 sf GFA •Bicycle: 1/7,500 sf GFA (20/80)	P-ZP	P-ZP	P-ZP	P-ZP	
Vehicle / Equipment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility	NP	NP	NP	NP	
	Automobile Services, Light •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	L-ZP	§11.4.18 §11.4.19
	Automobile Services, Heavy •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	NP	NP	L-ZP/ZPSE	NP	§11.4.18 §11.4.20
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer* •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	§11.4.21
	Heavy Vehicle/ Equipment Sales, Rentals & Service*	NP	NP	NP	NP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	C-MX-3 C-MX-5 C-MX-8 C-RX-5 C-MX-12 C-MS-5 C-CCN-7 C-RX-8 C-MX-16 C-MS-8 C-CCN-8 C-RX-12 C-MX-20 C-MS-12 C-CCN-12				APPLICABLE USE LIMITATIONS
--------------	--	---	--	--	--	----------------------------

INDUSTRIAL, MANUFACTURING & WHOLESALE PRIMARY USE CLASSIFICATION

Communications and Information	Antennas Not Attached to a Tower* •No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	§11.5.2
	Communication Services •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	P-ZP	C-MX-3: L-ZP/ZPSE All Others: P-ZP	P-ZP	P-ZP	§11.5.1
	Telecommunications Towers* •No Parking Requirements	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	§11.5.2
	Telecommunications Tower - Alternative Structure* •No Parking Requirements	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	§11.5.2
	Telecommunication Facilities -- All Others* •No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.5.2
Industrial Services	Contractors, Special Trade - General •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	NP	§11.5.3
	Contractors, Special Trade - Heavy/ Contractor Yard*	NP	NP	NP	NP	
	Food Preparation and Sales, Commercial •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	L-ZP	§ 11.5.5
	Laboratory, Research, Development and Technological Services •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	NP	§11.5.6
	Service/Repair, Commercial •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	NP	§11.5.7
Manufacturing and Production	Manufacturing, Fabrication & Assembly -- Custom •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	L-ZPIN	L-ZP	L-ZP	L-ZP	§11.5.8
	Manufacturing, Fabrication & Assembly -- General	NP	NP	NP	NP	
	Manufacturing, Fabrication & Assembly -- Heavy	NP	NP	NP	NP	
Mining & Extraction and Energy Producing Systems	Oil, Gas -- Production, Drilling*	NP	NP	NP	NP	
	Sand or Gravel Quarry*	NP	NP	NP	NP	
	Wind Energy Conversion Systems* •No Parking Requirements	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	§11.5.13

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)					APPLICABLE USE LIMITATIONS
		C-MX-3 C-MX-5 C-MX-8 C-RX-5 C-RX-8 C-RX-12	C-MX-12 C-MX-16 C-MX-20	C-MS-5 C-MS-8 C-MS-12	C-CCN-3 C-CCN-4 C-CCN-5 C-CCN-7 C-CCN-8 C-CCN-12	
Transportation Facilities	Airport*	NP	NP	NP	NP	
	Helipad, Heliport, Heliport* •No Parking Requirements	L-ZPIN	L-ZP	L-ZP	NP	§11.5.14
	Railroad Facilities*	NP	NP	NP	NP	
	Railway Right-of-Way* •No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	
	Terminal, Station or Service Facility for Passenger Transit System •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	P-ZP	P-ZP	P-ZP	P-ZP	
Waste Related Services	Terminal, Freight, Air Courier Services	NP	NP	NP	NP	
	Automobile Parts Recycling Business*	NP	NP	NP	NP	
	Junkyard*	NP	NP	NP	NP	
	Recycling Center	NP	NP	NP	NP	
	Recycling Collection Station	NP	NP	NP	NP	
Wholesale, Storage, Warehouse & Distribution	Recycling Plant, Scrap Processor	NP	NP	NP	NP	
	Solid Waste Facility	NP	NP	NP	NP	
	Automobile Towing Service Storage Yard*	NP	NP	NP	NP	
	Mini-storage Facility •Vehicle: 0.1/ 1,000 sf GFA •Bicycle: No requirement	NP	L-ZP	NP	NP	§11.5.23
	Vehicle Storage, Commercial*	NP	NP	NP	NP	
Agriculture	Wholesale Trade or Storage, General	NP	NP	NP	NP	
	Wholesale Trade or Storage, Light •Vehicle: .5 / 1,000 sf GFA •Bicycle: No requirement	NP	L-ZP/ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	NP	§11.5.26
	Aquaculture*	NP	NP	NP	NP	
	Garden, Urban* •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.2
	Husbandry, Animal*	NP	NP	NP	NP	
	Husbandry, Plant*	NP	NP	NP	NP	
	Plant Nursery •Vehicle: .5/ 1,000 sf GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.5

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations
 NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)					APPLICABLE USE LIMITATIONS
		C-MX-3		C-CCN-3		
		C-MX-5		C-CCN-4		
		C-MX-8		C-CCN-5		
	C-RX-5	C-MX-12	C-MS-5	C-CCN-7		
	C-RX-8	C-MX-16	C-MS-8	C-CCN-8		
	C-RX-12	C-MX-20	C-MS-12	C-CCN-12		

ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Residential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts				\$11.7
	Accessory Dwelling Unit	L-ZP	L-ZP	L-ZP	L-ZP	\$11.7; \$11.8.2
	Domestic Employee	L	L	L	L	\$11.7; \$11.8.3
	Garden*	L	L	L	L	\$11.7; \$11.8.4
	Keeping of Household Animals*	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	\$11.7; \$11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	L	L	L	\$11.7; \$10.9
	Kennel or Exercise Run*	L	L	L	L	\$11.7; \$11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	L-ZP	Not Applicable - See Permitted Primary Uses			\$11.7; \$11.8.7
	Outdoor Storage, Residential*	L	L	L	L	\$11.7; \$11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	NP	NP	NP	NP	
	Short-term Rental	L	L	L	L	\$11.7; \$11.8.10
	Vehicle Storage, Repair and Maintenance*	L	L	L	L	\$11.7; \$10.9
	Wind Energy Conversion Systems*	L-ZPIN/ ZPSE	Not Applicable - See Permitted Primary Uses			\$11.7; \$11.5.13
	Yard and/or Garage Sales*	L	L	L	L	\$11.7; \$11.8.11

HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Home Occupations (Parking is Not Required for Home Occupations Unless Specifically Stated in this Table or in an Applicable Use Limitations)	Child Care Home, Large	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	\$11.9; \$11.9.3
	All Other Types	L-ZP	L-ZP	L-ZP	L-ZP	\$11.9; \$11.9.4
	Unlisted Home Occupations	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	\$11.9; \$11.9.5

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations
NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review

When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (%) Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	C-MX-3 C-CCN-3 C-MX-5 C-CCN-4 C-MX-8 C-CCN-5 C-RX-5 C-MX-12 C-MS-5 C-CCN-7 C-RX-8 C-MX-16 C-MS-8 C-CCN-8 C-RX-12 C-MX-20 C-MS-12 C-CCN-12				APPLICABLE USE LIMITATIONS
--------------	--	--	--	--	--	----------------------------

ACCESSORY TO PRIMARY NONRESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Non-residential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts				\$11.7; 11.10.1
	Amusement Devices Accessory to Eating/Drinking Establishments, College/University and Theater Uses	NP	L-ZP	L-ZP	L-ZP	\$11.7; 11.10.2
	Automobile Rental Services Accessory to Certain Retail Uses*	Not Applicable - See Permitted Primary Uses	Not Applicable - See Permitted Primary Uses	Not Applicable - See Permitted Primary Uses	NP	\$11.7; 11.10.3
	Book or gift store; media recording and production facilities accessory to public libraries, museums, places of religious assembly, colleges or universities	Not Applicable - See Permitted Primary Uses				\$11.7; 11.10.4
	Car Wash Bay Accessory to Automobile Services or Hotel Uses	NP	NP	NP	NP	
	College accessory to a Place for Religious Assembly	Not Applicable - See Permitted Primary Uses				\$11.7; 11.10.6
	Conference Facilities Accessory to Hotel Use	NP	L	L	NP	\$11.7; 11.10.7
	Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses*	NP	L-ZP	L-ZP	NP	\$11.7; 11.10.8
	Emergency Vehicle Access Point	NP	NP	NP	NP	
	Garden*	L	L	L	L	\$11.7; 11.10.10
	Keeping of Animals	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	\$11.7; 11.10.11
	Nonresidential Uses in Existing Business Structures In Residential Zones - Accessory Uses	Not Applicable - See Permitted Primary Uses	Not Applicable			\$11.4.6
	Occasional Sales, Services Accessory to Places of Religious Assembly*	L	L	L	L	\$11.7; 11.10.12
	Outdoor Eating and Serving Area Accessory to Eating/Drinking Establishment Use*	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	\$11.7; 11.10.13
	Outdoor Entertainment Accessory to an Eating/Drinking Establishment Use*	L-ZPIN/ZPSE	L-ZPIN/ZPSE	L-ZPIN/ZPSE	L-ZPIN/ZPSE	\$11.7; 11.10.14
	Outdoor Retail Sale and Display*	NP	L-ZP	L-ZP/ZPSE	L-ZP/ZPSE	\$11.7; 11.10.15
	Outdoor Storage, General*	NP	NP	NP	NP	
	Outdoor Storage, Limited*	NP	L	L	L	\$11.7; 11.10.17
	Rental or Sales of Adult Material Accessory to a Permitted Bookstore Retail Sales Use	L	L	L	L	\$11.7; 11.10.18



ARTICLE 8. DOWNTOWN (D-) NEIGHBORHOOD CONTEXT



- e. Automobile Services, Light;
- f. Mini-storage Facility; or
- g. Wholesale Trade or Storage, Light.

2. Street Level active non-residential uses include all permitted accessory uses except the following:

- a. Accessory uses associated with primary uses prohibited by Section 8.9.5.2.C.1;
- b. Outdoor Storage, General;
- c. Outdoor Storage, Limited;
- d. Car Wash Bay Accessory to Automobile Services or Hotel Uses; or
- e. Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses.

3. Street Level active non-residential uses shall not include Parking Spaces or Parking Aisles.

4. Street Level active non-residential uses shall occupy Street Level floor area for a minimum depth of 15 feet (may include the depth of a recessed entrance allowed to meet minimum pedestrian access standards).

5. The length of any build-to alternatives permitted by Section 8.9.6.1 shall not apply toward the required percentage of Street Level building frontage that must be occupied by Street Level active non-residential uses.

8.9.5.3 Limitation on Primary Residential Uses Above 8 Stories in the Standard Tower Building Form in the D-CPV-C Zone District

A. Intent

To promote slender buildings and preserve access to sun, sky, and views by limiting use of the Standard Tower building form to primarily non-residential uses that require greater flexibility in Tower Floor Plate design standards than is allowed in the Point Tower building form.

B. Applicability

This Section 8.9.5.3 applies to the Standard Tower building form in the D-CPV-C zone districts.

C. Limitation on Primary Residential Uses

- 1. For purposes of this standard, Primary Residential Uses include all permitted uses listed under the Residential Primary Use Classification in Section 8.11.4, including but not limited to:
 - a. Dwelling, Multi-Unit;
 - b. Dwelling, Live / Work; or
 - c. **Student Housing Congregate Living.**
- 2. The total Gross Floor Area of all Primary Residential Uses located above 8 Stories and 110' shall not exceed the maximum percentage, specified in the building form table, of the total Gross Floor Area of the Structure located above 8 Stories and 110'. Note that the percentage of Gross Floor Area of Primary Residential Uses on any individual Story above 8 Stories and 110' may exceed the percentage specified in the building form table.

8.9.5.4 Limitation on Visible Parking Above Street Level in D-CPV-T, D-CPV-R, and D-CPV-C Zone Districts

A. Intent

To minimize the visibility, and impacts of structured parking and promote visual interest on upper story building facades.

SECTION 8.11.3 EXPLANATION OF USE & MINIMUM PARKING TABLE ABBREVIATIONS

8.11.3.1 General Explanation of Table Cell Entries

In each of the table cells, the entry will indicate first whether use limitations apply to the specific use, and then separated by a hyphen, the type of zoning review required prior to establishment of the use under this Code. For example, as described in more detail below, a cell entry "L-ZPIN" means, first, the use is subject to use limitations (the "L"), and, second, that the use is subject to zoning permit review with information notice (the "ZPIN") prior to its establishment.

8.11.3.2 Permitted, Limited, Not Permitted

A. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations.

B. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

C. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

8.11.3.3 Zoning Procedure

A. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

B. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

C. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6, Community Information Meeting.

D. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

E. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).



8.11.3.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type. For example, the asterisk following the "Telecommunication Tower*" use type in the tables indicates that a telecommunication tower land use need not be enclosed.

SECTION 8.11.4 DISTRICT SPECIFIC STANDARDS (USE & MINIMUM PARKING TABLE)

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE							APPLICABLE USE LIMITATIONS
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C
	D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)							

RESIDENTIAL PRIMARY USE CLASSIFICATION

Household Living	Dwelling, Single Unit • No Parking Requirements	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	\$11.2.6
	Dwelling, Two Unit • D-GT & D-AS Districts - Vehicle: 0.75/unit • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	\$11.2.6
	Dwelling, Multi-Unit • D-GT & D-AS Districts - Vehicle: 0.75/unit • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/2 units (80/20) • D-CPV-T/R/C Districts - Bicycle: 1.1/unit (80/20)	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	\$11.2.6
	Dwelling, Live / Work • D-GT & D-AS Districts - Vehicle: 0.75/unit • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/2 units (80/20) • D-CPV-T/R/C Districts - Bicycle: 1.1/unit (80/20)	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	\$11.2.4; \$11.2.6
Residential Care	Residential Care, Type 1 • D-GT & D-AS Districts - Vehicle: .25/1,000 sf GFA • Bicycle: 1/8,000 sf GFA (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.2.7; \$11.2.8
	Residential Care, Type 2 • D-GT & D-AS Districts - Vehicle: .25/1,000 sf GFA • Bicycle: 1/8,000 sf GFA (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.2.7; \$11.2.9
	Residential Care, Type 3 • D-GT & D-AS Districts - Vehicle: .25/1,000 sf GFA • Bicycle: 1/8,000 sf GFA (80/20)	L-ZP-CIM	L-ZPCIM	L-ZP-CIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	\$11.2.7; \$11.2.10
	Residential Care, Type 4 • D-GT & D-AS Districts - Vehicle: .25/1,000 sf GFA • Bicycle: 1/8,000 sf GFA (80/20)	L-ZP-CIM	L-ZPCIM	L-ZP-CIM	L-ZPCIM	L-ZPCIM	L-ZPCIM	\$11.2.7; \$11.2.11
Congregate Living	All Types • D-GT & D-AS Districts - Vehicle: .25/1,000 sf GFA • Bicycle: 1/8,000 sf GFA (80/20)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE							APPLICABLE USE LIMITATIONS
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	
Group Living	Assisted Living Facility <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: .75/unit • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: 1/10 units (50/50) 	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Community Corrections Facility <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: No requirement • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: 1/10 units (50/50) 	L-ZPIN	L-ZPIN	L-ZPIN	NP	NP	NP	§11.2.10
	Nursing Home, Hospice <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: .75/unit • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: 1/10 units (50/50) 	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	
	Residence for Older Adults <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: No requirement • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: 1/10 units (50/50) 	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	
	Residential Care Use, Small or Large <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: No requirement • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: 1/10 units (50/50) 	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.2.9
	Rooming and Boarding House <ul style="list-style-type: none"> • No Parking Requirements 	NP	NP	NP	NP	NP	P-ZP	
	Shelter for the Homeless <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: No requirement • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: No requirement 	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	§11.2.11
	Student Housing <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: 0.75/unit • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/2 units (80/20) • D-CPV-T/R/C Districts - Bicycle: 1.1/unit (80/20) 	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	

CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION

Basic Utilities	Utility, Major Impact* <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: No requirement 	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	§ 11.3.1
	Utility, Minor Impact* <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: No requirement 	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.2



KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE							APPLICABLE USE LIMITATIONS
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	
Community/ Public Services	Community Center • No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.3
	Day Care Center • D-GT & D-AS Districts - Vehicle: 1/ 1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/10,000 s.f. GFA (0/100) • D-CPV-T/R/C Districts - Bicycle: 1/5,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Facility, Neighborhood • D-GT & D-AS Districts - Vehicle: 1.25/ 1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80) • D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Processing Center • D-GT & D-AS Districts - Vehicle: 1/ 1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80) • D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	
	Public Safety Facility • D-GT & D-AS Districts - Vehicle: 1/ 1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/10,000 s.f. GFA (0/100) • D-CPV-T/R/C Districts - Bicycle: 1/5,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Hospital	P-ZP	P-ZP	NP	NP	NP		D-AS-12+/20+ & D-CPV-T/R: NP D-CPV-C: P-ZP
	Correctional Institution	NP	NP	NP	NP	NP	NP	
Cultural/Special Purpose/Public Parks & Open Space	Cemetery*	NP	NP	NP	NP	NP	NP	
	Library • D-GT & D-AS Districts - Vehicle: 1/ 1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/10,000 s.f. GFA (0/100) • D-CPV-T/R/C Districts - Bicycle: 1/5,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Museum • D-GT & D-AS Districts - Vehicle: 1/ 1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/10,000 s.f. GFA (0/100) • D-CPV-T/R/C Districts - Bicycle: 1/5,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	City Park*	NP	NP	NP	NP	NP	NP	
	Open Space - Conservation* • No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE							APPLICABLE USE LIMITATIONS
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	
	D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. <ul style="list-style-type: none"> • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility) 					D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C		

Education	Elementary or Secondary School <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle- Elementary: 1/1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle-Elementary: 1/10,000 s.f. GFA (0/100) • D-CPV-T/R/C Districts - Bicycle-Elementary: 1/5,000 s.f. GFA (0/100) • D-GT & D-AS Districts - Vehicle-Secondary: 1/1,000 s.f. GFA • D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle-Secondary: 1/ 5,000 s.f. GFA (0/100) 	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
	University or College <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: 1/1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/10,000 s.f. GFA (0/100) • D-CPV-T/R/C Districts - Bicycle: 1/5,000 s.f. GFA (0/100) 	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8; § 11.3.8
	Vocational or Professional School <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: 1/1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/10,000 s.f. GFA (0/100) • D-CPV-T/R/C Districts - Bicycle: 1/5,000 s.f. GFA (0/100) 	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
Public and Religious Assembly	All Types <ul style="list-style-type: none"> • No Parking Requirements 	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION

Adult Business	All Types	NP	NP	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.
		P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Arts, Recreation & Entertainment	Arts, Recreation and Entertainment Services, Indoor <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle - Artist Studio: 0.3/1000 sf GFA • D-GT & D-AS Districts - Vehicle - All Others: 1.25/1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80) • D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80) 	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Arts, Recreation and Entertainment Services, Outdoor* <ul style="list-style-type: none"> • D-GT & D-AS Districts - Vehicle: 1.25/1,000 s.f. GFA • D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80) • D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80) 	L-ZP	L-ZP	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§ 11.4.3
	Event Space with Alternate Parking and Loading* <ul style="list-style-type: none"> • Vehicle: No requirement • Bicycle: No requirement 	NP	NP	NP	NP	NP	NP	
	Sports and/or Entertainment Arena or Stadium*	NP	NP	NP	NP	NP	NP	D-AS-12+/20+ & D-CPV-T/R: NP D-CPV-C: P-ZP



KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. <ul style="list-style-type: none">• Vehicle Parking Reqmt: # spaces per unit of measurement• Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)							APPLICABLE USE LIMITATIONS D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	
Nonresidential Uses in Existing Business Structures In Residential Zones		Not Applicable						
Parking of Vehicles	Parking, Garage <ul style="list-style-type: none">• No Parking Requirements	L-ZP	L-ZP	NP	NP	L-ZP/ZPIN	P-ZP	§ 11.4.7
	Parking, Surface* <ul style="list-style-type: none">• No Parking Requirements	L-ZP	L-ZP	NP	NP	D-GT: L-ZPIN D-AS: P-ZPIN	NP	§ 11.4.8
Eating & Drinking Establishments	All Types <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: 2.5/ 1,000 s.f. GFA• D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: 1/1,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Lodging Accommodations	Bed and Breakfast Lodging <ul style="list-style-type: none">• D-AS & D-GT Districts - Vehicle - MS only: 2/ 1,000 s.f. GFA• D-GT & D-AS Districts - Vehicle: 0.875/guest room or unit• D-GT, D-AS, D-AS-12+/20+, & D-CPV-T/R/C Districts - Bicycle: 1/7,500 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	NP	P-ZPIN	P-ZP	
	Lodging Accommodations, All Others <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: 0.875/ guest room or unit• D-GT, D-AS, D-AS-12+/20+, & D-CPV-T/R/C Districts - Bicycle: 1/7,500 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	NP	P-ZPIN	P-ZP	
Office	Dental / Medical Office or Clinic <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: 1.25/ 1,000 s.f. GFA• D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80)• D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80)	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	§11.4.10
	Office, All Others <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: 1.25/ 1,000 s.f. GFA• D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80)• D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Animal Sales and Services, Household Pets Only <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: 1.25/ 1,000 s.f. GFA• D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80)• D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80)	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	§11.4.12
	Animal Sales and Services, All Others <ul style="list-style-type: none">• No Parking Requirements	P-ZP	P-ZP	NP	NP	NP	NP	
	Food Sales or Market <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: 1.25/ 1,000 s.f. GFA• D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80)• D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)							APPLICABLE USE LIMITATIONS D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C
		D-C	D-TD	D-LD	D-CV	D-GT D-AS		
Retail Sales, Service & Repair (Not Includ- ing Vehicle or Equipment Sales, Service & Repair)	Pawn Shop •D-GT & D-AS Districts - Vehicle: 1.25/ 1,000 s.f. GFA •D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80) •D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80)	L-ZP	L-ZP	NP	NP	L-ZPIN	L-ZPIN	§11.4.15
	Retail Sales, Service & Repair -- Outdoor*	NP	NP	NP	NP	NP	NP	
	Retail Sales, Service & Repair - Firearms Sales	NP	NP	NP	NP	NP	NP	
	Retail Sales, Service & Repair, All Others •D-GT & D-AS Districts - Vehicle: 1.25/ 1,000 s.f. GFA •D-GT, D-AS, & D-AS-12+/20+ Districts - Bicycle: 1/7,500 s.f. GFA (20/80) •D-CPV-T/R/C Districts - Bicycle: 1/4,000 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	
Vehicle / Equip- ment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility •D-GT & D-AS Districts - Vehicle: .5/ 1,000 s.f. GFA •D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: No requirement	L-ZP	L-ZP	NP	NP	L-ZP	NP	§ 11.4.17
	Automobile Services, Light •D-GT & D-AS Districts - Vehicle: .5/ 1,000 s.f. GFA •D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: No requirement	NP	NP	NP	NP	L-ZPIN	L-ZP	§11.4.18; §11.4.19
	Automobile Services, Heavy	NP	NP	NP	NP	NP	NP	
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer* •D-GT & D-AS Districts - Vehicle: .5/ 1,000 s.f. GFA •D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: No requirement	L-ZP	L-ZP	L-ZP	NP	L-ZPIN	L-ZP	§11.4.21
	Heavy Vehicle/ Equipment Sales, Rentals & Service*	NP	NP	NP	NP	NP	NP	
INDUSTRIAL, MANUFACTURING & WHOLESALE PRIMARY USE CLASSIFICATION								
Communications and Information	Antennas Not Attached to a Tower* •No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.5.2
	Communication Services •D-GT & D-AS Districts - Vehicle: .5/ 1,000 s.f. GFA •D-GT, D-AS, D-AS-12+/20+ & D-CPV-T/R/C Districts - Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.5.1
	Telecommunications Towers* •No Parking Requirements	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	§11.5.2
	Telecommunications Tower - Alternative Structure* •No Parking Requirements	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	§11.5.2
	Telecommunication Facilities -- All Others* •No Parking Requirements	L- ZPIN	L-ZPIN	L- ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.5.2



KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. <ul style="list-style-type: none">• Vehicle Parking Reqmt: # spaces per unit of measurement• Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)							APPLICABLE USE LIMITATIONS D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C
		D-C	D-TD	D-LD	D-CV	D-GT D-AS		
Industrial Services	Contractors, Special Trade - General <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	§11.5.3
	Contractors, Special Trade - Heavy/ Contractor Yard*	NP	NP	NP	NP	NP	NP	
	Food Preparation and Sales, Commercial <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	§ 11.5.5
Industrial Services	Laboratory, Research, Development and Technological Services <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	§11.5.6
	Service/Repair, Commercial <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	§11.5.7
Manufacturing and Production	Manufacturing, Fabrication & Assembly -- Custom <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	§11.5.8
	Manufacturing, Fabrication & Assembly -- General <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZPIN/ ZPSE	NP	L-ZPIN/ZPSE	L-ZP/ZPSE	§11.5.9
	Manufacturing, Fabrication & Assembly -- Heavy	NP	NP	NP	NP	NP	NP	
Mining & Extraction and Energy Producing Systems	Oil, Gas -- Production, Drilling*	NP	NP	NP	NP	NP	NP	
	Sand or Gravel Quarry*	NP	NP	NP	NP	NP	NP	
	Wind Energy Conversion Systems* <ul style="list-style-type: none">• No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.5.13
Transportation Facilities	Airport*	NP	NP	NP	NP	NP	NP	
	Helipad, Heliport, Heliport* <ul style="list-style-type: none">• No Parking Requirements	L-ZP	L-ZP	NP	L-ZP	L-ZP/ZPSE	L-ZP	§11.5.14
	Railroad Facilities* <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	L-ZP	L-ZP	NP	L-ZP	L-ZP	NP	§11.5.14.2
	Railway Right-of-Way* <ul style="list-style-type: none">• No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Terminal, Station or Service Facility for Passenger Transit System <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Terminal, Freight, Air Courier Services <ul style="list-style-type: none">• D-GT & D-AS Districts - Vehicle: .5 / 1,000 s.f. GFA• Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZPIN	NP	§ 11.5.17

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
 When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)							APPLICABLE USE LIMITATIONS D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	
Waste Related Services	Automobile Parts Recycling Business*	NP	NP	NP	NP	NP	NP	
	Junkyard*	NP	NP	NP	NP	NP	NP	
	Recycling Center	NP	NP	NP	NP	NP	NP	
	Recycling Collection Station	NP	NP	NP	NP	NP	NP	
	Recycling Plant, Scrap Processor	NP	NP	NP	NP	NP	NP	
	Solid Waste Facility	NP	NP	NP	NP	NP	NP	
Wholesale, Storage, Warehouse & Distribution	Automobile Towing Service Storage Yard*	NP	NP	NP	NP	NP	NP	
	Mini-storage Facility •D-GT & D-AS Districts - Vehicle: 0.1/1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	§11.5.23
	Vehicle Storage, Commercial* •D-GT & D-AS Districts - Vehicle: .5/1,000 s.f. GFA •Bicycle: No requirement	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	§ 11.5.24
	Wholesale Trade or Storage, General	NP	NP	NP	NP	NP	NP	
	Wholesale Trade or Storage, Light •D-GT & D-AS Districts - Vehicle: .5 /1,000 s.f. GFA •Bicycle: No requirement	P-ZP	P-ZP	P-ZP	NP	P-ZP	L-ZP/ZPIN/ ZPSE	§ 11.5.26
AGRICULTURE PRIMARY USE CLASSIFICATION								
Agriculture	Aquaculture*	NP	NP	NP	NP	NP	NP	
	Garden, Urban* •D-GT & D-AS Districts - Vehicle: .5/1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.2
	Husbandry, Animal*	NP	NP	NP	NP	NP	NP	
	Husbandry, Plant*	NP	NP	NP	NP	NP	NP	
	Plant Nursery •D-GT & D-AS Districts - Vehicle: .5/1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.5



KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE							APPLICABLE USE LIMITATIONS
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	
	D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)							D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C

ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Residential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts						\$11.7
	Accessory Dwelling Unit	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	\$11.7; \$11.8.2
	Domestic Employee	L	L	L	NP	L	L	\$11.7.1; \$11.8.3
	Garden*	L	L	L	NP	L	L	\$11.7; \$11.8.4
	Keeping of Household Animals*	L/L-ZPIN	L/L-ZPIN	L/L-ZPIN	NP	L/L-ZPIN	L/L-ZPIN	\$11.7; \$11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	L	L	NP	L	L	\$11.7; \$10.9
	Kennel or Exercise Run*	L	L	L	NP	L	L	\$11.7; \$11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	Not Applicable - See Permitted Primary Uses						\$11.7; \$11.8.7
	Outdoor Storage, Residential*	L	L	L	L	L	L	\$11.7; \$11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	\$11.7; \$11.8.9
	Short-term Rental	L	L	L	NP	L	L	\$11.7; \$11.8.10
	Vehicle Storage, Repair and Maintenance*	L	L	L	NP	L	L	\$11.7; \$10.9
	Wind Energy Conversion Systems*	Not Applicable - See Permitted Primary Uses						
	Yard or Garage Sales*	L	L	L	NP	L	L	\$11.7; \$11.8.11

HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Home Occupations Accessory to a Primary Residential Use (Parking is Not Required for Home Occupations Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Child Care Home, Large	L-ZPIN	L-ZPIN	L-ZPIN	NP	L-ZPIN	L-ZPIN	\$11.9; \$11.9.3
	All Other Types	L-ZP	L-ZP	L-ZP	NP	L-ZP	L-ZP	\$11.9; \$11.9.4
	Unlisted Home Occupations	L-ZPIN	L-ZPIN	L-ZPIN	NP	L-ZPIN	L-ZPIN	\$11.9; \$11.9.5



KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE							APPLICABLE USE LIMITATIONS
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	
	D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)							D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C

ACCESSORY TO PRIMARY NONRESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Nonresidential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts						\$11.7; \$11.10.1
	Amusement Devices Accessory to Eating/Drinking Establishments, College/University and Theater Uses	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.7; \$11.10.2
	Automobile Rental Services Accessory to Certain Retail Uses*	Not Applicable - See Permitted Primary Uses			NP	Not Applicable - See Permitted Primary Uses		
	Book or gift store; media recording and production facilities accessory to public libraries, museums, places of religious assembly, colleges or universities	L	L	L	L	L	L	\$11.7; \$11.10.4
	Car Wash Bay Accessory to Automobile Services	NP	NP	NP	NP	NP	NP	
	College accessory to a Place for Religious Assembly	L	L	L	L	L	L	\$11.7; \$11.10.6
	Conference Facilities Accessory to Hotel Use	L	L	L	L	L	L	\$11.7; \$11.10.7
	Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses*	NP	NP	NP	NP	L-ZP	NP	\$11.7; \$11.10.8
	Emergency Vehicle Access Point	NP	NP	NP	NP	NP/L-ZPSE	NP	\$11.7; \$11.10.9
	Garden*	L	L	L	L	L	L	\$11.7; \$11.10.10
	Keeping of Animals	L/ L-ZP/ L- ZPIN	L/ L-ZP/ L-ZPIN	L/ L-ZP/ L- ZPIN	L/ L-ZP/ L-ZPIN	L/ L-ZP/ L- ZPIN	L/L-ZP/L- ZPIN	\$11.7; \$11.10.11
	Nonresidential Uses in Existing Business Structures In Residential Zones - Accessory Uses	Not Applicable						
	Occasional Sales, Services Accessory to Places of Religious Assembly*	L	L	L	L	L	L	\$11.7; \$11.10.12
	Outdoor Eating and Serving Area Accessory to Eating/Drinking Establishment Use*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.7; \$11.10.13
	Outdoor Entertainment Accessory to an Eating/Drinking Establishment Use*	L- ZPIN/ ZPSE	L- ZPIN/ ZPSE	L- ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ZPSE	L-ZPIN/ZPSE	\$11.7; \$11.10.14
	Outdoor Retail Sale and Display*	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	\$11.7; \$11.10.15
	Outdoor Storage, General*	NP	NP	NP	NP	NP	NP	
	Outdoor Storage, Limited*	L	L	L	L	L	L	\$11.7; \$11.10.17
	Rental or Sales of Adult Material Accessory to a Permitted Bookstore Retail Sales Use	L	L	L	L	L	L	\$11.7; \$11.10.18

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE D-C, D-TD, D-CV, D-AS-12+/20+, D-CPV-T/R/C Districts have no minimum vehicle parking requirement. D-CPV-T/R/C maximum vehicle parking requirements are provided in Section 8.11.5. D-C, D-TD, D-CV bicycle parking requirements are provided in Section 8.3.1.5. D-LD vehicle parking requirements are provided in Section 8.4.1.4. •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt: # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)							APPLICABLE USE LIMITATIONS D-AS-12+ D-AS-20+ D-CPV-T D-CPV-R D-CPV-C
		D-C	D-TD	D-LD	D-CV	D-GT	D-AS	

TEMPORARY USE CLASSIFICATION

(Parking is Not Required for Temporary Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Temporary Uses	L - Applicable to all Zone Districts						\$11.11.1
	Ambulance Service - Temporary	Not Applicable - See Permitted Primary Uses						\$11.11.2
	Amusement / Entertainment - Temporary*	NP	NP	NP	NP	NP	NP	
	Bazaar, Carnival, Circus or Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.4
	Building or yard for construction materials*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.5
	Concrete, Asphalt, and Rock Crushing Facility*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.6
	Fence for Demolition or Construction Work	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.7
	Health Care Center	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	L-ZP	\$11.11.8
	Noncommercial Concrete Batching Plant*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.9
	Outdoor Retail Sales - Pedestrian / Transit Mall*	L-ZP	L-ZP	L-ZP	NP	NP	L-ZP	\$11.11.10
	Outdoor Retail Sales*	NP	NP	NP	NP	NP	NP	
	Outdoor Sales, Seasonal*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.12
	Parking Lot Designated for a Special Event*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.13
	Retail Food Establishment, Mobile*	L-ZP	L-ZP	L-ZP	NP	NP	L-ZP	\$11.11.14
	Temporary Construction Office	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.15
	Temporary Office - Real Estate Sales	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.11.16
	Temporary Tiny Home Village	L-ZP CIM	L-ZP CIM	L-ZP CIM	L-ZP CIM	L-ZP CIM	L-ZP CIM	\$11.11.17
	Tent for Religious Services	NP	NP	NP	NP	NP	NP	



ARTICLE 9. SPECIAL CONTEXTS AND DISTRICTS

B. Permitted, Limited, Not Permitted

1. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations.

2. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

3. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

4. Zoning Procedure Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

5. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

6. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

7. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

8. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

9.1.5.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and

9.1.5.5 District Specific Standards

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
RESIDENTIAL PRIMARY USE CLASSIFICATION					
Household Living	Dwelling, Single Unit • <u>Vehicle: 5 or fewer adults:</u> No Parking Requirements. • <u>Vehicle: 6 or more adults:</u> 2/unit • <u>Bicycle: No requirement</u>	L-ZP	L-ZP	L-ZP	§11.2.1, §11.2.6
	Dwelling, Two Unit • Vehicle - I-MX only: 1/unit • Vehicle: 1.25/unit • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	§11.2.2, §11.2.6
	Dwelling, Multi-Unit • Vehicle - I-MX only: 1/unit • Vehicle: 1.25/unit • Bicycle: 1/ 5 units (80/20)	L-ZP	L-ZP	L-ZP	§11.2.3, §11.2.6
	Dwelling, Live / Work • Vehicle - I-MX only: 1/unit • Vehicle: 1.25/unit • Bicycle: 1/ 5 units (80/20)	L-ZP	L-ZP	L-ZP	§11.2.4, §11.2.6
	<u>Residential Care, Type 1</u> • <u>Vehicle - I-MX only: .25/1,000 sf GFA</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: No Requirement</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>§11.2.7; §11.2.8</u>
	<u>Residential Care, Type 2</u> • <u>Vehicle - I-MX only: .25/1,000 sf GFA</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: No Requirement</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>§11.2.7; §11.2.9</u>
	<u>Residential Care, Type 3</u> • <u>Vehicle - I-MX only: .25/1,000 sf GFA</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: No Requirement</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>§11.2.7; §11.2.10</u>
	<u>Residential Care, Type 4</u> • <u>Vehicle - I-MX only: .25/1,000 sf GFA</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: No Requirement</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>§11.2.7; §11.2.11</u>
Congregate Living	<u>All Types</u> • <u>Vehicle - I-MX only: .25/1,000 sf GFA</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: 1/20,000 sf GFA (80/20)</u>	<u>P-ZP</u>	<u>NP</u>	<u>NP</u>	

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Requirement -# of spaces per unit of measurement •Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
Group Living	Assisted Living Facility	P-ZP	NP	NP	\$11.2.6; \$11.2.7
	Community Corrections Facility •Vehicle - I-MX only: 0.125/unit •Vehicle: .25/unit •Bicycle: No requirement	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	\$11.2.10
	Nursing Home, Hospice	NP	NP	NP	
	Residence for Older Adults •Vehicle: .75/unit •Bicycle: No requirement	P-ZP	NP	NP	
	Residential Care Use, Small or Large •Vehicle - I-MX only: 0.125/unit •Vehicle: .25/unit •Bicycle: No requirement	L-ZPIN	NP	NP	\$11.2.9
	Rooming and Boarding House •Vehicle: 3.75 / 1,000 s.f. GFA •Bicycle: No requirement	P-ZP	NP	NP	
	Shelter for the Homeless •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	\$11.2.11
	Student Housing •Vehicle - I-MX only: 1/unit •Vehicle: 1.25/unit •Bicycle: 1 / 5 units (80/20)	P-ZP	NP	NP	

CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION

Basic Utilities	Utility, Major Impact* •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	L-ZPSE	L-ZPSE	L-ZPSE	§ 11.3.1
	Utility, Minor Impact* •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	§ 11.3.2
Community/ Public Services	Community Center •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	
	Day Care Center •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	
	Postal Facility, Neighborhood •Vehicle - I-MX only: 1.875 / 1,000 s.f. GFA •Vehicle: 2.5 / 1,000 s.f. GFA •Bicycle: 1 / 20,000 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	
	Postal Processing Center •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 20,000 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	
	Public Safety Facility •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	
	Hospital	NP	NP	NP	
	Correctional Institution	NP	NP	NP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
Cultural/Special Purpose/Public Parks & Open Space	Cemetery* • No Parking Requirements	L-ZP	L-ZP	L-ZP	§11.3.6
	Library • Vehicle: 1/ 1,000 s.f. GFA • Bicycle: 1/ 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	NP	
	Museum • Vehicle: 1/ 1,000 s.f. GFA • Bicycle: 1/ 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	
	City Park*	NP	NP	NP	
	Open Space - Conservation* • No Parking Requirements	P-ZP	P-ZP	P-ZP	
Education	Elementary or Secondary School • Vehicle - I-MX only: 1/ 1,000 s.f. GFA • Vehicle - High School, I-A and I-B: 2/1,000 s.f. GFA • Bicycle - High School, I-A and I-B: 1/ 20,000 s.f. GFA (0/100) • Vehicle - All Others, I-A and I-B: 1/ 1,000 s.f. GFA • Bicycle - All Others, I-A and I-B: 1/ 10,000 s.f. GFA (0/100)	L-ZP	L-ZP	NP	§ 11.3.8
	University or College • Vehicle: 1/ 1,000 s.f. GFA • Bicycle: 1/ 10,000 s.f. GFA (0/100)	L-ZP	L-ZP	L-ZP	§ 11.3.8
	Vocational or Professional School • Vehicle: 1/ 1,000 s.f. GFA • Bicycle: 1/ 10,000 s.f. GFA (0/100)	L-ZP	L-ZP	L-ZP	§ 11.3.8
Public and Religious Assembly	All Types • Vehicle: .5/ 1,000 s.f. GFA • Bicycle: 1/10,000 s.f. GFA (0/100)	P-ZP	P-ZP	NP	
COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION					
Adult Business	All Types	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
Arts, Recreation and Entertainment	Arts, Recreation and Entertainment Services, Indoor • Vehicle - Artist Studio: 0.3/1000 sf GFA • Vehicle - All Others - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle - All Others: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA(20/80)	P-ZP	P-ZP	P-ZP	
	Arts, Recreation and Entertainment Services, Outdoor* • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (20/80)	L-ZP	L-ZP	L-ZP	\$11.4.2
	Event Space with Alternate Parking and Loading* • Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	
	Sports and/or Entertainment Arena or Stadium* • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA(20/80)	L-ZP	L-ZP	L-ZP	\$11.4.5
Nonresidential Uses in Existing Business Structures In Residential Zones (All Uses Shall Be Parked According to the Parking Requirement Stated in this Use Table for the Specific Nonresidential Use)		Not Applicable			
Parking of Vehicles	Parking, Garage • No Parking Requirements	P-ZP	P-ZP	P-ZP	
	Parking, Surface* • No Parking Requirements	P-ZP	P-ZP	P-ZP	
Eating & Drinking Establishments	All Types • Vehicle - I-MX only: 3.75/ 1,000 s.f. GFA • Vehicle: 5/ 1,000 s.f. GFA • Bicycle: 1/5,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	
Lodging Accommodations	Bed and Breakfast Lodging • Vehicle - I-MX only: 1/guest room or unit • Vehicle: 1.25/guest room or unit • Bicycle: 1/20,000 s.f. GFA (60/40)	P-ZP	NP	NP	
	Lodging Accommodations, All Others • Vehicle - I-MX only: 1/guest room or unit • Vehicle: 1.25/guest room or unit • Bicycle: 1/20,000 s.f. GFA (60/40)	P-ZP	P-ZP	P-ZP	
Office	Dental / Medical Office or Clinic • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (60/40)	L-ZP	L-ZP	L-ZP	\$11.4.10
	Office, All Others • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (60/40)	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Animal Sales and Services, Household Pets Only • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (20/80)	P-ZP	P-ZP	P-ZP	
	Animal Sales and Services, All Others • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (20/80)	L-ZP	L-ZP	L-ZP	\$11.4.13
	Food Sales or Market • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (20/80)	L-ZP	P-ZP	P-ZP	\$11.4.14
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Pawn Shop	NP	NP	NP	
	Retail Sales, Service & Repair -- Outdoor* • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (20/80)	L-ZP	L-ZP	L-ZP	\$11.4.16; \$11.4.11
	Retail Sales, Service & Repair - Firearms Sales • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (20/80)	P-ZP	L-ZP	L-ZP	\$11.4.11
	Retail Sales, Service & Repair, All Others • Vehicle - I-MX only: 1.875/ 1,000 s.f. GFA • Vehicle: 2.5/ 1,000 s.f. GFA • Bicycle: 1/20,000 s.f. GFA (20/80)	P-ZP	P-ZP	L-ZP	\$11.4.11
Vehicle / Equipment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility • Vehicle: .5/ 1,000 s.f. GFA • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	
	Automobile Services, Light • Vehicle: .5/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.4.18; \$11.4.19
	Automobile Services, Heavy • Vehicle: .5/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	\$11.4.18; \$11.4.20
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer* • Vehicle: .5/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.4.21
	Heavy Vehicle/ Equipment Sales, Rentals & Service* • Vehicle: .5/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZPSE	L-ZPIN	L-ZP	\$11.4.22

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
INDUSTRIAL, MANUFACTURING & WHOLESALE PRIMARY USE CLASSIFICATION					
Communications and Information	Antennas Not Attached to a Tower* • No Parking Requirements	L-ZP	L-ZP	L-ZP	\$11.5.2
	Communication Services • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	
	Telecommunications Towers* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	\$11.5.2
	Telecommunications Tower - Alternative Structure • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	\$11.5.2
	Telecommunication Facilities -- All Others* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZPIN	L-ZP	L-ZP	\$11.5.2
Industrial Services	Contractors, Special Trade - General • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.3
	Contractors, Special Trade - Heavy/ Contractor Yard* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.4
	Food Preparation and Sales, Commercial • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.5
	Laboratory, Research, Development and Technological Services • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.6
	Service/Repair, Commercial • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.7
Manufacturing and Production	Manufacturing, Fabrication & Assembly -- Custom • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	P-ZP	P-ZP	\$11.5.8
	Manufacturing, Fabrication & Assembly -- General • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP/ZPSE	L-ZP	L-ZP	\$11.5.9
	Manufacturing, Fabrication & Assembly -- Heavy • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	NP	L-ZP	L-ZP	\$11.5.10
Mining & Extraction and Energy Producing Systems	Oil, Gas -- Production, Drilling* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.11
	Sand or Gravel Quarry* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	NP	L-ZP	L-ZP	\$11.5.12
	Wind Energy Conversion Systems* • No Parking Requirements	L-ZP	L-ZP	L-ZP	\$11.5.13

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)				APPLICABLE USE LIMITATIONS
		I-MX-3	I-MX-5	I-MX-8	
Transportation Facilities	Airport*	NP	NP	NP	
	Helipad, Heliport, Heliport* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.14
	Railroad Facilities* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.14.1
	Railway Right-of-Way* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	
	Terminal, Station or Service Facility for Passenger Transit System • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	
	Terminal, Freight, Air Courier Services • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.17
Waste Related Services	Automobile Parts Recycling Business* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	NP	L-ZP	L-ZP	\$11.5.18
	Junkyard* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	NP	NP	L-ZP	\$11.5.19
	Recycling Center • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZPIN	L-ZP	L-ZP	\$11.5.20
	Recycling Collection Station • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	
	Recycling Plant, Scrap Processor • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.21
	Solid Waste Facility • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	NP	P-ZPIN	P-ZP	
Wholesale, Storage, Warehouse & Distribution	Automobile Towing Service Storage Yard* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	NP	L-ZP	L-ZP	\$11.5.22
	Mini-storage Facility • Vehicle: 0.1/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.5.23
	Vehicle Storage, Commercial* • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	NP	L-ZP	L-ZP	\$11.5.24
	Wholesale Trade or Storage, General • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	NP	L-ZP	L-ZP	\$11.5.25
	Wholesale Trade or Storage, Light • Vehicle: .3/ 1,000 s.f. GFA • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	\$11.5.26

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Requirement -# of spaces per unit of measurement •Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
--------------	--	----------------------------	-----	-----	----------------------------

AGRICULTURE PRIMARY USE CLASSIFICATION

Agriculture	Aquaculture* •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.6.1
	Garden, Urban* •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	\$11.6.2
	Husbandry, Animal* •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	NP	NP	L-ZP	\$11.6.3
	Husbandry, Plant* •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	\$11.6.4
	Plant Nursery •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP*	L-ZP*	\$11.6.5

ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Residential Uses In the I-A and I-B Zone Districts, see Sections 11.2.1 through 11.2.3 for additional limitations on accessory uses. (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable in all Zone Districts			\$11.7
	Accessory Dwelling Unit	L-ZP	NP	NP	\$11.7; \$11.8.2
	Domestic Employee	L	NP	NP	\$11.8.3
	Garden*	L	L	L	\$11.7; \$11.8.4
	Keeping of Household Animals*	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	\$11.7; \$11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	NP	NP	\$11.7; \$10.9
	Kennel or Exercise Run*	L	L	L	\$11.7; \$11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	Not Applicable - See Permitted Primary Uses	NP	NP	\$11.7; \$11.8.7
	Outdoor Storage, Residential*	L	L	L	\$11.7; \$11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	\$11.8.9

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION					
Home Occupations	Child Care Home, Large	L-ZPIN	L-ZPIN	L-ZPIN	\$11.9; \$11.9.3
	All Other Types	L-ZP	L-ZP	L-ZP	\$11.9; \$11.9.4
	Unlisted Home Occupations	L - ZPIN - Applicable in all Zone Districts			\$11.9; \$11.9.5
ACCESSORY TO PRIMARY NONRESIDENTIAL USES USE CLASSIFICATION					
Accessory to Primary Nonresidential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable in all Zone Districts			\$11.7; \$11.10.1
	Amusement Devices Accessory to Eating/Drinking Establishments, College/University and Theater Uses	L-ZP	L-ZP	L-ZP	\$11.7; \$11.10.2
	Automobile Rental Services Accessory to Certain Retail Uses*	Not Applicable - See Permitted Primary Uses			\$11.7; \$11.10.3
	Book or gift store; media recording and production facilities accessory to public libraries, museums, places of religious assembly, colleges or universities	Not Applicable - See Permitted Primary Uses	L	L	\$11.7
	Car Wash Bay Accessory to Automobile Services	L-ZP	L-ZP	L-ZP	\$11.7; \$11.10.5
	College Accessory to a Place for Religious Assembly	Not Applicable - See Permitted Primary Uses			\$11.7; \$11.10.6
	Conference Facilities Accessory to Hotel Use	L	L	L	\$11.7; \$11.10.7
	Drive Through Facility Accessory to Eating/Drinking Establishments and to Retail Sales, Service, and Repair Uses*	L-ZP	L-ZP	L-ZP	\$11.7; \$11.10.8
	Emergency Vehicle Access Point	NP	NP	NP	
	Garden*	L	L	L	\$11.7; \$11.10.10
	Keeping of Animals	L/L-ZP/ L-ZPIN	L/L-ZP/ L-ZPIN	L/L-ZP/ L-ZPIN	\$11.7; \$11.10.11
	Nonresidential Uses in Existing Business Structures In Residential Zones - Accessory Uses	Not Applicable			
	Occasional Sales, Services Accessory to Places of Religious Assembly*	L	L	L	\$11.7; \$11.10.12
	Outdoor Eating and Serving Area Accessory to Eating/Drinking Establishment Use*	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	\$11.7; \$11.10.13
	Outdoor Entertainment Accessory to an Eating/Drinking Establishment Use*	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	\$11.7; \$11.10.14
	Outdoor Retail Sale and Display*	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	\$11.7; \$11.10.15
	Outdoor Storage, General*	L-ZP	L-ZP	L-ZP	
	Outdoor Storage, Limited*	L-ZP	P-ZP	P-ZP	\$11.7; \$11.10.17
	Rental or Sales of Adult Material Accessory to a Permitted Bookstore Use	L	NP	NP	\$11.7; \$11.10.18

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Requirement -# of spaces per unit of measurement •Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	I-MX-3 I-MX-5 I-MX-8	I-A	I-B	APPLICABLE USE LIMITATIONS
--------------	--	----------------------------	-----	-----	----------------------------

TEMPORARY USE CLASSIFICATION

Temporary Uses	Unlisted Temporary Uses	L - Applicable to all Zone Districts			\$11.11.1
	Ambulance Service - Temporary	Not Applicable - See Permitted Primary Uses			\$11.11.2
	Amusement / Entertainment - Temporary*	L-ZP	L-ZP	L-ZP	\$11.11.3
	Bazaar, Carnival, Circus or Special Event*	L-ZP	L-ZP	L-ZP	\$11.11.4
	Building or yard for construction materials*	L-ZP	L-ZP	L-ZP	\$11.11.5
	Concrete, Asphalt, and Rock Crushing Facility*	L-ZP	L-ZP	L-ZP	\$11.11.6
	Fence for Demolition or Construction Work	L-ZP	L-ZP	L-ZP	\$11.11.7
	Health Care Center	P-ZP	P-ZP	P-ZP	
	Noncommercial Concrete Batching Plant*	L-ZP	L-ZP	L-ZP	\$11.11.9
	Outdoor Retail Sales - Pedestrian / Transit Mall*	NP	NP	NP	
	Outdoor Retail Sales*	L-ZP	L-ZP	L-ZP	\$11.11.11
	Outdoor Sales, Seasonal*	L-ZP	L-ZP	L-ZP	\$11.11.12
	Parking Lot Designated for a Special Event*	L-ZP	L-ZP	L-ZP	\$11.11.13
	Retail Food Establishment, Mobile*	L-ZP	L-ZP	L-ZP	\$11.11.14
	Temporary Construction Office	L-ZP	L-ZP	L-ZP	\$11.11.15
	Temporary Office - Real Estate Sales	L-ZP	NP	NP	\$11.11.16
	Temporary Tiny Home Village	L-ZPCIM	L-ZPCIM	L-ZPCIM	\$11.11.17
	Tent for Religious Services	L-ZP	L-ZP	L-ZP	\$11.11.18

2. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

3. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

C. Zoning Procedure

1. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

2. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

3. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

4. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

5. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

9.2.8.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type. For

9.2.8.5 District Specific Standards

KEY: * = Need Not be Enclosed ZPCIM = Community Information Meeting P = Permitted Use without Limitations
Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice
Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)									APPLICABLE USE LIMITATIONS
		CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC	CMP-NWC-C	CMP-NWC-G	CMP-NWC-F	CMP-NWC-R	
RESIDENTIAL PRIMARY USE CLASSIFICATION										
Household Living	Dwelling, Single Unit • No Parking Requirements	NP	L-ZP	NP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.2.6
	Dwelling, Two Unit • Vehicle: 0.75/unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	L-ZP	NP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.2.6
	Dwelling, Multi-Unit • Vehicle: 0.75/unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/2 units (80/20)	L-ZPIN	EI: L-ZP EI2: L-ZPIN	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.2.6
	Dwelling, Live / Work • Vehicle: 0.75/unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/2 units (80/20)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
Residential Care	<u>Residential Care, Type 1</u> • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>NP</u>	<u>§11.2.7; §11.2.8</u>
	<u>Residential Care, Type 2</u> • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>L-ZP</u>	<u>§11.2.7; §11.2.9</u>
	<u>Residential Care, Type 3</u> • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>§11.2.7; §11.2.10</u>
	<u>Residential Care, Type 4</u> • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>L-ZPCIM</u>	<u>§11.2.7; §11.2.11</u>
Congregate Living	<u>All Types</u> • Vehicle: 1/1,000 sf GFA • Bicycle: 1/20,000 sf GFA	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC C	CMP-NWC-C G	CMP-NWC-F G	CMP-NWC-R F	APPLICABLE USE LIMITATIONS
Group Living	Assisted Living Facility • Vehicle: 0.75/unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts – Vehicle: No requirement • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	NP
	Community Corrections Facility	NP	NP	NP	NP	NP	NP	NP	NP
	Nursing Home, Hospice • Vehicle: 0.75/unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts – Vehicle: No requirement • Bicycle: No requirement	P-ZP	P-ZPIN	NP	P-ZP	P-ZP	P-ZP	P-ZP	NP
	Residence for Older Adults • Vehicle: 0.75/unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts – Vehicle: No requirement • Bicycle: No requirement	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	NP
	Residential Care Use, Small or Large • Vehicle: .25/unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts – Vehicle: No requirement • Bicycle: No requirement	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	NP
	Rooming and Boarding House • Vehicle: 2.5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts – Vehicle: No requirement • Bicycle: No requirement	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	NP
	Shelter for the Homeless • No Parking Requirements	L	L-ZPIN/L	L	L	L	L	L	§ 11.2.9
	Student Housing • Vehicle: 1.25/unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts – Vehicle: No requirement • Bicycle: 1 / 5 units (100/0)	P-ZPIN	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.2.11



KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC	CMP-NWC-C	CMP-NWC-G	CMP-NWC-F	CMP-NWC-R	APPLICABLE USE LIMITATIONS
CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION										
Basic Utilities	Utility, Major Impact* • Vehicle: .5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	§ 11.3.1
	Utility, Minor Impact* • Vehicle: .5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.2
Community/ Public Services	Community Center • Vehicle: No requirement • Bicycle: 1/10,000 s.f. GFA (0/100)	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.3
	Day Care Center • Vehicle: 1/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Facility, Neighborhood • Vehicle: 1.25/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/7,500 s.f. GFA (20/80)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
	Postal Processing Center	NP	NP	NP	NP	NP	NP	NP	NP	
	Public Safety Facility • Vehicle: 1/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Hospital	P-ZP	NP	NP	NP	NP	NP	NP	NP	
	Correctional Institution	NP	NP	NP	NP	NP	NP	NP	NP	
Cultural/Special Purpose/Public Parks & Open Space	Cemetery*	NP	NP	NP	NP	NP	NP	NP	NP	
	Library • Vehicle: 1/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 10,000 s.f. GFA (0/100)	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Museum • Vehicle: 1/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 10,000 s.f. GFA (0/100)	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	City Park*	NP	NP	NP	NP	NP	NP	NP	NP	
	Open Space - Conservation* • No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review

When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC C	CMP-NWC-C G	CMP-NWC-F F	CMP-NWC-R R	APPLICABLE USE LIMITATIONS
Education	Elementary or Secondary School • Vehicle: 1/1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle - High School: 1/ 5,000 s.f. GFA (0/100) • Bicycle-All Others: 1/ 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	University or College • Vehicle: 1/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Vocational or Professional School • Vehicle: 1/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	NP	P-ZP	P-ZP	P-ZP	P-ZP	
Public and Religious Assembly	All Types • No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION

Adult Business	All Types	NP	NP	NP	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.
Arts, Recreation & Entertainment	Arts, Recreation and Entertainment Services, Indoor • Vehicle - Artist Studio: 0.3/1000 sf GFA • Vehicle - All Others: 1.25/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/7,500 s.f. GFA (20/80)	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Arts, Recreation and Entertainment Services, Outdoor* • Vehicle: 1.25/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/7,500 s.f. GFA (20/80)	NP	NP	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	§11.4.3
	Event Space with Alternate Parking and Loading* • Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	NP	NP	L-ZP	L-ZP	NP
	Sports and/or Entertainment Arena or Stadium* • Vehicle: 1.25/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/7,500 s.f. GFA (20/80)	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
Nonresidential Uses in Existing Business Structures In Residential Zones (All Uses Shall Be Parked According to the Parking Requirement Stated in this Use Table for the Specific Nonresidential Use)		Not Applicable							
Parking of Vehicles	Parking, Garage • No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
	Parking, Surface* • No Parking Requirements	L-ZP	L-ZP	P-ZP	P-ZP	NP	P-ZP	P-ZP	§11.4.8



KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC	CMP-NWC-C	CMP-NWC-G	CMP-NWC-F	CMP-NWC-R	APPLICABLE USE LIMITATIONS
Eating & Drinking Establishments	All Types • Vehicle: 2.5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/1,500 s.f. GFA (0/100)	H: P-ZP H2: L-ZP	EI: P-ZP EI2: L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§11.4.9
Lodging Accommodations	Bed and Breakfast Lodging • Vehicle: 0.875/guest room or unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/7,500 s.f. GFA (60/40)	P-ZP	EI: P-ZP EI2: NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
Office	Lodging Accommodations, All Others • Vehicle: 0.5/ guest room or unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/7,500 s.f. GFA (60/40)	P-ZPIN	EI: P-ZPIN EI2: NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
	Dental / Medical Office or Clinic • Vehicle: 2.5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/7,500 s.f. GFA (60/40)	L-ZP	L-ZP/P-ZPIN	NP	L-ZP	P-ZP	P-ZP	P-ZP	NP	§11.4.10
	Office, All Others • Vehicle: 2.5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/7,500 s.f. GFA (60/40)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
	Animal Sales and Services, Household Pets Only • Vehicle: 1.25/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 7,500 s.f. GFA (20/80)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
	Animal Sales and Services, All Others* • Vehicle: 1.25/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 7,500 s.f. GFA (20/80)	NP	NP	NP	L-ZP	P-ZP	P-ZP	P-ZP	NP	
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Food Sales or Market* • Vehicle: 1.25/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 7,500 s.f. GFA (20/80)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Pawn Shop	NP	NP	NP	NP	NP	NP	NP	NP	
	Retail Sales, Service & Repair -- Outdoor* • Vehicle: 1.25/1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 7,500 s.f. GFA (20/80)	NP	NP	NP	L-ZP	NP	L-ZP	L-ZP	NP	§11.4.16
	Retail Sales, Service & Repair - Firearms Sales • Vehicle: 1.25/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: 1/ 7,500 s.f. GFA (20/80)	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
	Retail Sales, Service & Repair, All Others • Vehicle: 1.25/ 1,000 s.f. GFA • Bicycle: 1/7,500 s.f. GFA (20/80)	ZPIN	NP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice Exception Review
ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)									APPLICABLE USE LIMITATIONS		
		CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC	CMP-NWC-C	CMP-NWC-G	CMP-NWC-F	CMP-NWC-R			
Vehicle / Equipment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility	NP										
	Automobile Services, Light	NP	NP	NP	NP	NP	NP	L-ZP	NP	§11.4.18		
	Automobile Services, Heavy	NP	NP	NP	NP	NP	NP	L-ZP	NP	§11.4.18		
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer*	NP										
	Heavy Vehicle/ Equipment Sales, Rentals & Service*	NP										
INDUSTRIAL, MANUFACTURING & WHOLESALE PRIMARY USE CLASSIFICATION												
Communications and Information	Antennas Not Attached to a Tower* • No Parking Requirements	L-ZP	§11.5.2									
	Communication Services • Vehicle: .5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	P-ZP	NP	§11.5.1								
	Telecommunications Towers* • No Parking Requirements	L-ZP/ ZPIN/ ZPSE	§11.5.2									
	Telecommunications Tower - Alternative Structure • No Parking Requirements	L-ZP/ ZPIN	L-ZP/ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	L-ZP/ ZPIN	§11.5.2		
	Telecommunication Facilities -- All Others* • No Parking Requirements	L-ZP	§11.5.2									
Industrial Services	Contractors, Special Trade - General	NP	NP	NP	NP	NP	NP	L-ZP	NP	§11.5.3		
	Contractors, Special Trade - Heavy/ Contractor Yard*	NP	NP	NP	NP	NP	NP	L-ZP	NP	§11.5.4		
	Food Preparation and Sales, Commercial • Vehicle: .5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.5.5		
	Laboratory, Research, Development and Technological Services • Vehicle: .5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	P-ZPIN	EI: P-ZPIN EI2: NP	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§11.5.6		
	Service/Repair, Commercial	NP	NP	NP	NP	NP	NP	L-ZP	NP	§11.5.7		
Manufacturing and Production	Manufacturing, Fabrication & Assembly -- Custom • Vehicle: .5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.5.8		
	Manufacturing, Fabrication & Assembly -- General • Vehicle: .5/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	L-ZP/	ZPSE	L-ZP/	ZPSE	L-ZP/	ZPSE	NP	§11.5.9
	Manufacturing, Fabrication & Assembly -- Heavy	NP										
Mining & Extraction and Energy Producing Systems	Oil, Gas -- Production, Drilling*	NP										
	Sand or Gravel Quarry*	NP										
	Wind Energy Conversion Systems* • No Parking Requirements	L-ZP	§11.5.13									

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)									APPLICABLE USE LIMITATIONS
		CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC	CMP-NWC-C	CMP-NWC-G	CMP-NWC-F	CMP-NWC-R	
Transportation Facilities	Airport*	NP	NP	NP	NP	NP	NP	NP	NP	
	Helipad, Heliport, Heliport* • No Parking Requirements	L-ZP/ ZPSE	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.5.14
	Railroad Facilities* • Vehicle: .3/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	L-ZP	NP	L-ZP	L-ZP	NP	§11.5.15
	Railway Right-of-Way* • No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Terminal, Station or Service Facility for Passenger Transit System	NP	NP	NP	P-ZP	P-ZP	P-ZP	P-ZP	NP	
	Terminal, Freight, Air Courier Services	NP	NP	NP	NP	NP	NP	NP	NP	
Waste Related Services	Automobile Parts Recycling Business	NP	NP	NP	NP	NP	NP	NP	NP	
	Junkyard*	NP	NP	NP	NP	NP	NP	NP	NP	
	Recycling Center • Vehicle: .3/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	L-ZP	NP	L-ZP	L-ZP	NP	§11.5.20
	Recycling Collection Station • Vehicle: .3/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	P-ZP	NP	P-ZP	P-ZP	NP	
	Recycling Plant, Scrap Processor	NP	NP	NP	NP	NP	NP	NP	NP	
	Solid Waste Facility	NP	NP	NP	NP	NP	NP	NP	NP	
Wholesale, Storage, Warehouse & Distribution	Automobile Towing Service Storage Yard*	NP	NP	NP	NP	NP	NP	NP	NP	
	Mini-storage Facility	NP	NP	NP	NP	NP	NP	NP	NP	
	Vehicle Storage, Commercial*	NP	NP	NP	NP	NP	NP	L-ZP	NP	§11.5.24
	Wholesale Trade or Storage, General	NP	NP	NP	NP	NP	NP	NP	NP	
	Wholesale Trade or Storage, Light • Vehicle: .3/ 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	L-ZP	NP	NP	L-ZP	NP	§11.5.26

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC	CMP-NWC-C	CMP-NWC-G	CMP-NWC-F	CMP-NWC-R	APPLICABLE USE LIMITATIONS
--------------	--	-----------------	-------------------	---------	---------	-----------	-----------	-----------	-----------	----------------------------

AGRICULTURE PRIMARY USE CLASSIFICATION

Agriculture	Aquaculture* • Vehicle: .5 / 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.6.1
	Garden, Urban* • Vehicle: .5 / 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	L-ZP	§11.6.2							
	Husbandry, Animal* • Vehicle: .5 / 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.6.3
	Husbandry, Plant*	NP								
	Plant Nursery • Vehicle: .5 / 1,000 s.f. GFA • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	NP	NP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.6.5

ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

(Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts								§11.7
	Accessory Dwelling Unit • Vehicle: 1 / Unit • CMP-NWC-C, CMP-NWC-G, CMP-NWC-F, CMP-NWC-R Districts - Vehicle: No requirement • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.7; §11.8.2
	Domestic Employee	L	L	L	L	L	L	L	NP	§11.8.3
	Garden*	L	L	L	L	L	L	L	NP	§11.7; §11.8.4
	Keeping of Household Animals*	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	NP	§11.7; §11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	NP	NP	NP	NP	L	L	L	NP	§11.7; §10.9
	Kennel or Exercise Run*	L	L	L	L	L	L	L	NP	§11.7; §11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.7; §11.8.7
	Outdoor Storage, Residential	L	L	L	L	L	L	L	NP	§11.7; §11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.7; §11.8.9
	Short-term Rental	L	L	L	L	L	L	L	NP	§11.7; §11.8.10
	Vehicle Storage, Repair and Maintenance Accessory to a Dwelling Use*	L	L	L	L	L	L	L	NP	§11.7; §10.9
	Wind Energy Conversion Systems*	Not Applicable - See Permitted Primary Uses								

HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

Home Occupations	Child Care Home, Large	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	NP	§11.9; §11.9.3
	All Other Types	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	§11.9; §11.9.4
	Unlisted Home Occupations	L-ZPIN - Applicable to all Zone Districts								§11.9; §11.9.5

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)									APPLICABLE USE LIMITATIONS
		CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC	CMP-NWC-C	CMP-NWC-G	CMP-NWC-F	CMP-NWC-R	

ACCESSORY TO PRIMARY NONRESIDENTIAL USES USE CLASSIFICATION

Accessory to Primary Nonresidential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable to all Zone Districts								\$11.7; \$11.10.1
	Amusement Devices Accessory to Eating / Drinking Establishments, College / University and Theater Uses	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.7; \$11.10.2
	Automobile Rental Services Accessory to Certain Retail Uses*	L	L	L	L	L	L	L	NP	\$11.7; \$11.10.3
	Book or gift store; media recording and production facilities accessory to public libraries, museums, places of religious assembly, colleges or universities	L	L	L	L	L	L	L	L	§ 11.7
	Car Wash Bay Accessory to Automobile Services	L-ZP	L-ZP	L-ZP	NP	NP	NP	L-ZP	NP	\$11.7; \$11.10.5
	College Accessory to a Place for Religious Assembly	L	L	NP	L	L	L	L	NP	\$11.7; \$11.10.6
	Conference Facilities Accessory to Hotel Use	L	L	L	L	L	L	L	NP	\$11.7; \$11.10.7
	Drive Through Facility Accessory to Eating / Drinking Establishments and to Retail Sales, Service, and Repair Uses*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	\$11.7; \$11.10.8
	Emergency Vehicle Access Point	L-ZPSE	NP	NP	NP	NP	NP	NP	NP	\$11.7; \$11.10.9
	Garden*	L	L	L	L	L	L	L	L	\$11.7; \$11.10.10
	Keeping of Animals	L/L-ZP/ L-ZPIN	L/L-ZP/ L-ZPIN	L/L-ZP/ L-ZPIN	L/L-ZP/ L-ZPIN	L	L	L	L	\$11.7; § 11.10.11
	Nonresidential Uses in Existing Business Structures In Residential Zones - Accessory Uses	Not Applicable								
	Occasional Sales, Services Accessory to Places of Religious Assembly*	L	L	L	L	L	L	L	L	\$11.7; \$11.10.12
	Outdoor Eating and Serving Area Accessory to Eating / Drinking Establishments Use*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	\$11.7; \$11.10.13
	Outdoor Entertainment Accessory to Eating / Drinking Establishments Use*	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	\$11.7; \$11.10.14
	Outdoor Retail Sale and Display*	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	L-ZP/ ZPSE	\$11.7; \$11.10.15
	Outdoor Storage, General*	NP	NP	NP	NP	NP	NP	L-ZP	NP	
	Outdoor Storage, Limited*	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	NP	\$11.7; \$11.10.17
	Rental or Sales of Adult Material Accessory to a Permitted Bookstore Retail Sales Use	L	L	L	L	L	L	L	L	\$11.7; \$11.10.18

KEY: * = Need Not be Enclosed [ZPCIM = Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review
When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	CMP-H CMP-H2	CMP-EI CMP-EI2	CMP-ENT	CMP-NWC	CMP-NWC-C	CMP-NWC-G	CMP-NWC-F	CMP-NWC-R	APPLICABLE USE LIMITATIONS
TEMPORARY USE CLASSIFICATION										
Unlisted Temporary Uses			L - Applicable in all Zone Districts							
Ambulance Service - Temporary			Not Applicable - See Permitted Primary Uses							
Amusement / Entertainment - Temporary*			L-ZP	P-ZP	P-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.2
Bazaar, Carnival, Circus or Special Event*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.3
Building or Yard for Construction Materials*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.4
Concrete, Asphalt, and Rock Crushing Facility*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.5
Fence for Demolition or Construction Work			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.6
Health Care Center			P-ZP	P-ZP	P-ZP	P-ZP	L-ZP	L-ZP	L-ZP	§11.11.7
Noncommercial Concrete Batching Plant*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.8
Outdoor Retail Sales - Pedestrian / Transit Mall*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.9
Outdoor Retail Sales*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.10
Outdoor Sales, Seasonal*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.11
Parking Lot Designated for a Special Event*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.12
Retail Food Establishment, Mobile*			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.13
Temporary Construction Office			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.14
Temporary Office - Real Estate Sales			L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.15
Temporary Tiny Home Village			L-ZP CIM	L-ZP CIM	L-ZP CIM	L-ZP CIM	L-ZP CIM	L-ZP CIM	L-ZP CIM	§11.11.16
Tent for Religious Services			P-ZP	P-ZP	P-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.11.17
										§11.11.18

plicable Use Limitations”), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

3. Use Subject to Zoning Permit Review with Community Information Meeting (“ZPCIM”)

“ZPCIM” in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

4. Use Subject to Zoning Permit with Special Exception Review (“ZPSE”)

“ZPSE” in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. “ZPSE” uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table (“Applicable Use Limitations”), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

5. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example “L-ZP/ZPIN”, the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate “L-ZPIN/ZPSE” for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

9.3.4.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk “*” next to the specific use type. For example, the asterisk following the “Telecommunication Tower*” use type in the tables indicates that a telecommunication tower land use need not be enclosed.

9.3.4.5 District Specific Standards

KEY: * = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use
ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice
ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Requirement -# of spaces per unit of measurement • Bicycle Parking Requirement -# of spaces per unit of measurement (% required spaces in indoor facility/% required spaces in fixed facility)	OS-A	OS-B	OS-C	APPLICABLE USE LIMITATIONS
RESIDENTIAL PRIMARY USE CLASSIFICATION					
Household Living	Dwelling, Single Unit	NP	NP		
	Dwelling, Two Unit	NP	NP		
	Dwelling, Multi-Unit	NP	NP		
	Dwelling, Live / Work	NP	NP		
Residential Care	All Types	NP	NP		
Congregate Living	All Types	NP	NP		
Group Living	Assisted Living Facility	NP	NP		
	Community Corrections Facility	NP	NP		
	Nursing Home, Hospice	NP	NP		
	Residence for Older Adults	NP	NP		
	Residential Care Use, Small or Large	NP	NP		
	Rooming and Boarding House	NP	NP		
	Shelter for the Homeless	L	L	§ 11.2.11	
	Student Housing	NP	NP		
CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION					
Basic Utilities	Utility, Major Impact* • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: No requirement	L-ZPSE	L-ZPSE	§ 11.3.1	
	Utility, Minor Impact* • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	NP	§ 11.3.2	
Community/ Public Services	Community Center • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: 1/10,000 s.f. GFA (0/100)	L-ZP	NP	§ 11.3.3	
	Day Care Center • Vehicle: 1 / 1,000 s.f. GFA • Bicycle: 1 / 10,000 s.f. GFA (0/100)	P-ZP	NP		
	Postal Facility, Neighborhood	NP	NP		
	Postal Processing Center	NP	NP		
	Public Safety Facility • Vehicle: 1 / 1,000 s.f. GFA • Bicycle: 1 / 10,000 s.f. GFA (0/100)	P-ZP	NP		
	Hospital	NP	NP		
	Correctional Institution	NP	NP		

2. Permitted Use - Subject to Use Limitations ("L")
"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

3. Uses Not Permitted ("NP")
"NP" in a table cell indicates that the use is not permitted in the specific zone district.

C. Zoning Procedure

1. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

2. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

3. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

4. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

5. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

9.5.5.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type. For

example, the asterisk following the “Telecommunication Tower*” use type in the tables indicates that a telecommunication tower land use need not be enclosed.

9.5.5.5 District Specific Standards

KEY: * = Need Not be Enclosed P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE	DIA	O-1	APPLICABLE USE LIMITATIONS IN THE O-1 ZONE DISTRICT ONLY
RESIDENTIAL PRIMARY USE CLASSIFICATION				
Household Living	Dwelling, Single Unit		NP	
	Dwelling, Two Unit		NP	
	Dwelling, Multi-Unit		NP	
	Dwelling, Live / Work		NP	
Residential Care	<u>Residential Care, Type 1</u> • Vehicle: .25/1,000 sf GFA • Bicycle: No requirement		L-ZP	<u>§ 11.2.7</u>
	<u>Residential Care, Type 2</u> • Vehicle: .25/1,000 sf GFA • Bicycle: No requirement		L-ZP	<u>§ 11.2.7</u>
	<u>Residential Care, Type 3</u> • Vehicle: .25/1,000 sf GFA • Bicycle: No requirement		L-ZPCIM	<u>§ 11.2.7</u>
	<u>Residential Care, Type 4</u> • Vehicle: .25/1,000 sf GFA • Bicycle: No requirement		L-ZPCIM	<u>§ 11.2.7</u>
Congregate Living	<u>All Types</u> • Vehicle: .5/1,000 sf GFA • Bicycle: 1/20,000 sf GFA		NP	
			P-ZP	<u>§ 11.2.6; § 11.2.7</u>
Group Living	Assisted Living Facility		NP	
	Community Corrections Facility		NP	
	Nursing Home, Hospice		NP	
	Residence for Older Adults		NP	
	Residential Care Use, Small or Large • Vehicle: .25/unit • Bicycle: No requirement		L-ZPIN	<u>§ 11.2.9</u>
	Rooming and Boarding House		NP	
	Shelter for the Homeless • Vehicle: .5/1,000 sf GFA • Bicycle: No requirement		L-ZPIN/L	<u>§ 11.2.11</u>
	Student Housing		NP	

See Section 9.5.1 for permitted uses and required parking

URBAN HOUSE

HEIGHT		M-RH-3 M-RX-3, M-RX-5, M-RX-5A, M-GMX, M-MX-5
A	Stories (max)	2.5
A	Feet (max)	42'
SITING		M-RH-3 M-RX-3, M-RX-5, M-RX-5A, M-GMX, M-MX-5
ZONE LOT		
Zone Lot Size (min)		3,000 sf
C	Zone Lot Width (min)	25'
SETBACKS		
D	Primary Street (min)	10'
E	Side Street (min)	10'
F	Side, interior (min)	3'
G	Rear (min)	0'
Building Coverage per Zone Lot, including all accessory structures (max)		75%
PARKING		
Parking and Drive Lot Coverage in Primary Street Setback (max)		2 Spaces and 320 SF
Vehicle Access	From Alley; or Street access allowed when no Alley present (See Section 9.7.7.6)	
H	DETACHED ACCESSORY STRUCTURES	(See Section 9.7.4)
DESIGN ELEMENTS		M-RH-3 M-RX-3, M-RX-5, M-RX-5A, M-GMX, M-MX-5
BUILDING CONFIGURATION		
Primary Street Facing Attached Garage Door Width in first 50% of lot depth(max)		35% of the entire width of the Primary Street facing facade of the primary structure or 16', whichever is greater
Attached Garage Allowed		Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use. (2) Shall be setback 20' from back of sidewalk for building walls with garage doors that are facing a street
STREET LEVEL ACTIVATION		
Design Criteria		(See Section 9.7.5.1)
I	Pedestrian Access, Primary Street	Entry Feature
USES		M-RH-3, M-RX-3, M-RX-5, M-RX-5A, M-GMX, M-MX-5
Primary Uses shall be limited to Single Unit Dwelling and permitted Group Living Congregate Living, Residential Care , and Nonresidential uses. (See Section 9.7.9 Uses and Parking)		
See Sections 9.7.5 - 9.7.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions		

DUPLEX

		M-RH-3	M-RX-5		
		M-RX-3	M-MX-5		
		M-RX-5A, M-GMX, M-CC-5			
H E I G H T					
A Stories (max)	2.5	2.5			
A Feet (max)	42'	42'			
S I T I N G		M-RH-3	M-RX-5		
		M-RX-3	M-MX-5		
ZONE LOT			M-RX-5A, M-GMX, M-CC-5		
Zone Lot Size (min)	4,000 sf	4,000 sf			
C Zone Lot Width (min)	45'	45'			
S E T B A C K S					
D Primary Street (min)	10'	10'			
E Side Street (min)	10'	10'			
F Side, interior (min)	5'	3'			
G Rear (min)	0'	0'			
Building Coverage per Zone Lot, including all accessory structures (max)	75%	na			
P A R K I N G					
Parking and Drive Lot Coverage in Primary Street Setback (max)		50%			
Vehicle Access	From Alley; or Street access allowed when no Alley present (See Section 9.7.7.6)				
H D E T A C H E D A C C E S S O R Y S T R U C T U R E S	(See Section 9.7.4)				
D E S I G N E L E M E N T S		M-RH-3	M-RX-5		
		M-RX-3	M-MX-5		
B U I L D I N G C O N F I G U R A T I O N			M-RX-5A, M-GMX, M-CC-5		
Primary Street Facing Attached Garage Door Width in first 50% of lot depth(max)		35% of the entire width of the Primary Street facing facade of the primary structure or 16', whichever is greater			
Attached Garage Allowed		Shall not be located closer to the minimum Primary Street setback line than the Primary Street facing facade(s) comprising at least 65% of the total width of the primary structure enclosing the primary use.			
S T R E E T L E V E L A C T I V A T I O N					
Design Criteria		(See Section 9.7.5.1)			
I Pedestrian Access, Primary Street		Entry Feature			
U S E S	M-RH-3, M-RX-3, M-RX-5, M-RX-5A, M-MX-5, M-CC-5, M-GMX				
	Primary Uses shall be limited to Two Unit Dwelling and permitted Group Living-Congregate Living, Residential Care , and Nonresidential uses. (See Section 9.7.9 Uses and Parking)				

See Sections 9.7.5 - 9.7.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

GARDEN COURT

HEIGHT	M-RH-3	M-RX-5A, M-GMX
A Stories (max)	2.5	2.5
A Feet (max)	42'	42'
B Side Wall Height (Max)	34'	34'

SITING	M-RH-3	M-RX-5A, M-GMX
ZONE LOT		
Zone Lot Size (min)	6,000 sf	na
SETBACKS		
C Primary Street (min)	10'	10'
D Side Street (min)	10'	10'
E Side, interior (min)	5'	5'
F Rear alley/no alley (min)	5'/15'	0'0'
Building Coverage per Zone Lot, including all accessory structures (max)	75%	na
PARKING		
Surface Parking Location	No surface parking between building and Primary Street	
Vehicle Access	From Alley; or Street access allowed when no Alley present (See Sec. 9.7.7.6)	
ACCESSORY STRUCTURES		
G Detached Accessory Structures Allowed	See Sec. 9.7.4	

DESIGN ELEMENTS	M-RH-3	M-RX-5A, M-GMX
H Street-Facing Courtyard Width (min)	15'	15'
I Street-Facing Courtyard Depth (min)	30'	30'
Garden Court Design Standards	See Sec. 9.7.5.2	
Attached Garage Allowed	May follow the Detached Garage building form Side Street, Side Interior and Rear setbacks	
STREET LEVEL ACTIVATION		
J Pedestrian Access, Primary Street	Each dwelling unit shall have a Street Level Entrance. A minimum two dwelling units shall each have an Entrance facing the Primary Street and all other dwelling units shall have an Entrance that faces either the Primary Street or the interior courtyard.	

USES	M-RH-3, M-RX-5A, M-GMX
	Primary Uses shall be limited to Multi Unit Dwelling (3+) and permitted <u>Group Living</u> <u>Congregate Living</u> , <u>Residential Care</u> , and Nonresidential uses. See Section 9.7.9 Uses and Parking

See Sections 9.7.5 - 9.7.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

TOWN HOUSE

HEIGHT		M-RX-5A	M-GMX
A Stories (max)		5	
A Feet (max)		65'	

SITING		M-RX-5A	M-GMX
ZONE LOT			
Zone Lot Size (min)		na	
Dwelling Units per Primary Residential Structure (min/max)		3/na	
REQUIRED BUILD-TO			
C Primary Street (min % within min/max)		50%	0'/80'
SETBACKS			
E Primary Street (min)		10'	
F Side Street (min)		10'	
G Side, interior (min)		5'	
Side, interior, adjacent to Protected District (min)		10'	
H Rear, alley/no alley (min)		10'/20'	
PARKING			
Vehicle Access		From Alley; or Street access allowed when no Alley present (See Sec. 9.7.7.6)	
ACCESSORY STRUCTURES			
I Detached Accessory Structures Allowed		See Sec. 9.7.4	

DESIGN ELEMENTS		M-RX-5A	M-GMX
BUILDING CONFIGURATION			
Primary Street-Facing Attached Garage Door			
Width (max per unit)		16'	
STREET LEVEL ACTIVATION			
L Transparency, Primary Street (min)*		20%	
M Pedestrian Access		Entrance or Pedestrian Connection	

USES		M-RX-5A	M-GMX
		Primary Uses shall be limited to Multi Unit Dwelling (3+) and permitted Group Living Congregate Living , Residential Care , and Nonresidential uses. See Section 9.7.9 Uses and Parking	

See Sections 9.7.5 - 9.7.7 for Supplemental Design Standards, Design Standard Alternatives and Design Standard Exceptions

* Applies only to street-facing portions of building facade located within 80' of the Primary and/or Side Street

ROW HOUSE

		M-RH-3	M-RX-5A	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX
HEIGHT				
A Stories (max)	3	5	5	
A Feet (max)	55'	70'	70'	
B Side Wall Height (max)	49'	na	na	
SITING		M-RH-3	M-RX-5A	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX
ZONE LOT				
Zone Lot Size (min)	6,000 sf	na	na	
Dwelling Units per Primary Residential Structure (min/max)	3/10	3/na	3/na	
REQUIRED BUILD-TO				
C Primary Street (min % within min/max)	na	60% 0'/15'	60% 0'/15'	
D Side Street (min % within min/max)	na	na	na	
SETBACKS				
E Primary Street (min)	10'	0'	0'	
F Side Street (min)	10'	0'	0'	
G Side, interior (min)	5'	0'	0'	
Side, interior, adjacent to Protected District (min)	na	5'	5'	
H Rear (min)	0'	0'	0'	
Rear, adjacent to Protected District, alley/no alley (min)	na	5'/10'	5'/10'	
PARKING				
Surface Parking Location	Not allowed between the building and the Primary Street			
Vehicle Access, 3 or more side-by-side dwelling units in one structure, and/or M-RH-3	From Alley; or Street access allowed when no Alley present. (See Sec. 9.7.7.6)			
Vehicle Access, all other uses	Shall be determined as part of Site Development Plan Review			
ACCESSORY STRUCTURES				
I Detached Accessory Structures Allowed	See Sec. 9.7.4			
DESIGN ELEMENTS		M-RH-3	M-RX-5A	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX
BUILDING CONFIGURATION				
J Upper Story Setback Above 27' adjacent to Protected District, Rear, alley/Rear, no alley /Side, interior (min)	15'/20'/25'	15'/20'/25'	15'/20'/25'	
K Upper Story Setback Above 51', adjacent to Protected District, Rear, alley/Rear, no alley/Side Interior (min)	na	na	30'/35'/40'	
Street facing garage door width per Primary Structure (max)	20'	20'	20'	
Attached Garage Allowed	May follow the Detached Garage building form Side Street, Side Interior and Rear setbacks			na
STREET LEVEL ACTIVATION				
L Transparency, Primary Street (min)	20%	20%	20%	
M Pedestrian Access, Primary Street	Entrance or Pedestrian Connection M-RH-3; M-RX-5A; M-GMX and all M-IMX			
USES	Permitted Primary Uses shall be limited to Multi Unit Dwelling (3+) and permitted Group Living-Congregate Living, Residential Care, and Nonresidential uses. See Section 9.7.9 Uses and Parking			

APARTMENT

HEIGHT	M-RX-5A	M-IMX-5	M-IMX-8	M-IMX-12 M-GMX
A Stories (max)	5	5	8	12
A Feet (max)	70'	70'	100'	140'

SITING	M-RX-5A	M-IMX-5	M-IMX-8	M-IMX-12 M-GMX
REQUIRED BUILD-TO				
B Primary Street (% within min/max)	50% 0'/20'	50% 0'/15'	60% 0'/15'	50% 0'/15'
SETBACKS				
C Primary Street (min)	0'	0'	0'	0'
D Side Street (min)	0'	0'	0'	0'
E Side, interior (min)	0'	0'	0'	0'
Side, interior, adjacent to Protected District (min)	10'	10'	10'	10'
F Rear (min)	0'	0'	0'	0'
Rear, adjacent to Protected District, alley/no alley (min)	5'/10'	5'/10'	5'/10'	5'/10'
PARKING				
Surface Parking Location	Not allowed between the building and the Primary Street			
Vehicle Access, 3 or more side-by-side dwelling units in one structure	From Alley; or Street access allowed when no Alley present (Sec. 9.7.7.6)			
Vehicle Access, all other permitted uses	Shall be determined as part of Site Development Plan Review			

DESIGN ELEMENTS	M-RX-5A	M-IMX-5	M-IMX-8	M-IMX-12 M-GMX
CONFIGURATION				
G Upper Story Setback Above 27', adjacent to Protected District, Rear, alley/Rear, no alley and Side Interior (min)	15'/20'/25'	15'/20'/25'	15'/20'/25'	15'/20'/25'
H Upper Story Setback Above 51', adjacent to Protected District, Rear, alley/Rear, no alley and Side Interior (min)	na	30'/35'/40'	30'/35'/40'	30'/35'/40'
I Upper Story Setback Above 70', adjacent to Protected District, Rear, alley/Rear, no alley and Side Interior (min)	na	na	90'/90'/90'	90'/90'/90'
STREET LEVEL ACTIVATION				
J Transparency , Primary Street (min)	30%	30%	30%	30%
K Transparency, Side Street (min)	25%	25%	25%	25%
L Pedestrian Access, Primary Street	Pedestrian Connection			

USES	M-RX-5A; M-GMX and all M-IMX
	Permitted Primary Uses shall be limited to Multi Unit Dwelling (3+) and permitted Group Living , Congregate Living , Residential Care , and Lodging Accommodations Uses. See Section 9.7.9 Uses and Parking

B. Permitted, Limited, Not Permitted

1. Permitted Use - No Use Limitations Apply ("P")

A "P" in a table cell indicates that the use is permitted in the respective zone district, and is not subject to use limitations.

2. Permitted Use - Subject to Use Limitations ("L")

"L" in a table cell indicates the use is permitted in the zone district subject to compliance with the use limitations referenced in the last column of the use table ("Applicable Use Limitations").

3. Uses Not Permitted ("NP")

"NP" in a table cell indicates that the use is not permitted in the specific zone district.

C. Zoning Procedure

1. Use Subject to Zoning Permit Review ("ZP")

"ZP" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the requirements in Section 12.4.1, Zoning Permit Review.

2. Use Subject to Zoning Permit Review with Informational Notice ("ZPIN")

"ZPIN" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.2, Zoning Permit Review with Informational Notice. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.2, Zoning Permit Review with Informational Notice.

3. Use Subject to Zoning Permit Review with Community Information Meeting ("ZPCIM")

"ZPCIM" in a table cell indicates that the use is permitted in the respective zone district only if reviewed and approved according to the public notice and procedural requirements in Section 12.4.1, Zoning Permit Review. Prior to formal application, an applicant shall schedule a community information meeting and provide public notice of the community information meeting according to Section 12.3.4.6., Community Information Meeting.

4. Use Subject to Zoning Permit with Special Exception Review ("ZPSE")

"ZPSE" in a table cell indicates that use is generally appropriate in the neighborhood context and zone district, yet may have the potential for limited impacts on adjacent properties or on the established character of the neighborhood context or zone district. "ZPSE" uses are subject to a Board of Adjustments public hearing according to Section 12.4.9, Zoning Permit with Special Exception Review, which grants the Board of Adjustment the authority to impose conditions on the specified use to mitigate any potential impacts. Such uses shall comply with any applicable use limitations noted in the last column of the use table ("Applicable Use Limitations"), as well as the review criteria stated in Section 12.4.9, Zoning Permit with Special Exception Review.

5. Uses Where More Than One Zoning Procedure Is Indicated

Where a table cell shows more than one zoning procedure applies to a use, for example "L-ZP/ZPIN", the referenced use limitation (last table column) will indicate which zoning procedure applies in a specific case. For example, a table cell may indicate "L-ZPIN/ZPSE" for a use. This means that the ZPIN zoning procedure will apply, unless the applicable use limitation specifies the ZPSE zoning procedure is triggered (e.g., by proximity to a Protected District).

9.7.9.4 Enclosure of Uses

All primary, accessory and temporary uses must be established, operated and maintained within a completely enclosed structure, unless otherwise specifically allowed by this Code. The Use and Parking Tables in Articles 3-9 indicate when a use may be established, operated or maintained outside a completely enclosed structure by including an asterisk "*" next to the specific use type. For example, the asterisk following the "Telecommunication Tower*" use type in the tables indicates that a telecommunication tower land use need not be enclosed.

9.7.9.5 District Specific Standards

KEY: *= Need Not be Enclosed [ZPCM = Zoning Permit with Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use

ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice

ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	M-RH-3	M-RX-3 M-RX-5 M-RX-5A	M-CC-5	M-MX-5	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX	APPLICABLE USE LIMITATIONS
RESIDENTIAL PRIMARY USE CLASSIFICATION							
Household Living	Dwelling, Single Unit • <u>Vehicle: 5 or fewer adults:</u> No Parking Requirements. • <u>Vehicle: 6 or more adults: 2/unit</u> • <u>Bicycle: No requirement</u>	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.6
	Dwelling, Two Unit • Vehicle: 1/unit • Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.6
	Dwelling, Multi-Unit • Vehicle: 1/unit • Bicycle: 1/ 4 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§11.2.6
	Dwelling, Live / Work • Vehicle: 1/unit • Bicycle: 1/ 4 units (80/20)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.2.4, §11.2.6
Residential Care	<u>Residential Care, Type 1</u> • <u>Vehicle: .25/1,000 sf GFA</u> • <u>Bicycle: No requirement</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>§11.2.7; §11.2.8</u>
	<u>Residential Care, Type 2</u> • <u>Vehicle: .25/1,000 sf GFA</u> • <u>Bicycle: No requirement</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>§11.2.7; §11.2.9</u>
	<u>Residential Care, Type 3</u> • <u>Vehicle: .25/1,000 sf GFA</u> • <u>Bicycle: No requirement</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>§11.2.7; §11.2.10</u>
	<u>Residential Care, Type 4</u> • <u>Vehicle: .25/1,000 sf GFA</u> • <u>Bicycle: No requirement</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>L-ZPCM</u>	<u>§11.2.7; §11.2.11</u>
Congregate Living	<u>All Types</u> • <u>Vehicle: .5/1,000 sf GFA</u> • <u>Bicycle: 1/20,000 sf GFA</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	<u>P-ZP</u>	

KEY: *= Need Not be Enclosed ZPCIM = Zoning Permit with Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use
ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice
ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	M-RH-3	M-RX-3 M-RX-5 M-RX-5A	M-CC-5	M-MX-5	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX	APPLICABLE USE LIMITATIONS
Group Living	Assisted Living Facility •Vehicle: .75/unit •Bicycle: No requirement	P-ZPIN	P-ZP	P-ZP	P-ZP	P-ZP	
	Community Corrections Facility	NP	NP	NP	NP	NP	
	Nursing Home, Hospice •Vehicle: .75/unit •Bicycle: No requirement	NP	P-ZP	P-ZP	P-ZP	NP	
	Residence for Older Adults •Vehicle: .75/unit •Bicycle: No requirement	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Residential Care Use, Small or Large •Vehicle: 0.125/unit •Bicycle: No requirement	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§11.2.9
	Rooming and Boarding House •Vehicle: 3.75/ 1,000 s.f. GFA •Bicycle: No requirement	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Shelter for the Homeless •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: No requirement	L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	L-ZPIN/L	§11.2.11
	Student Housing •Vehicle: 1/unit •Bicycle: 1/ 4 units (80/20)	NP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: *= Need Not be Enclosed ZPCIM = Zoning Permit with Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use
ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice
ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	M-RH-3	M-RX-3 M-RX-5 M-RX-5A	M-CC-5	M-MX-5	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX	APPLICABLE USE LIMITATIONS
--------------	---	--------	-----------------------------	--------	--------	---	----------------------------

CIVIC, PUBLIC & INSTITUTIONAL PRIMARY USE CLASSIFICATION

Basic Utilities	Utility, Major Impact* •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: No requirement	L-ZPSE	L-ZPSE	L-ZPSE	L-ZPSE	P-ZPSE	§ 11.3.1
	Utility, Minor Impact* •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.2
Community/ Public Services	Community Center •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	P-ZP	§ 11.3.3
	Day Care Center •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Facility, Neighborhood •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (60/40)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Postal Processing Center •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Public Safety Facility •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.5
	Hospital	NP	NP	NP	NP	NP	
	Correctional Institution	NP	NP	NP	NP	NP	
Cultural/Special Purpose/Public Parks & Open Space	Cemetery*	NP	NP	NP	NP	NP	
	Library •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Museum •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	City Park*	NP	NP	NP	NP	NP	
	Open Space - Conservation* •No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
Education	Elementary or Secondary School •Vehicle: 1/1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
	University or College •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
	Vocational or Professional School •Vehicle: 1 / 1,000 s.f. GFA •Bicycle: 1 / 10,000 s.f. GFA (0/100)	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.3.8
Public and Religious Assembly	All Types •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (0/100)	L-ZP	L-ZP	P-ZP	P-ZP	P-ZP	§ 11.3.10

COMMERCIAL SALES, SERVICES, & REPAIR PRIMARY USE CLASSIFICATION

Adult Business	All Types	NP	NP	NP	NP	NP	See Section 9.4.4, Use Overlay Districts, for adult business use allowance in the UO-1 District.
----------------	-----------	----	----	----	----	----	--

KEY: *= Need Not be Enclosed ZPCIM = Zoning Permit with Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use
ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice
ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	M-RH-3	M-RX-3 M-RX-5 M-RX-5A	M-CC-5	M-MX-5	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX	APPLICABLE USE LIMITATIONS
Arts, Recreation & Entertainment	Arts, Recreation and Entertainment Services, Indoor •Vehicle - Artist Studio: 0.3/1000 sf GFA •Vehicle - All Others: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Arts, Recreation and Entertainment Services, Outdoor* •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	L-ZP	L-ZP	L-ZPIN	L-ZP	§ 11.4.3
	Event Space with Alternate Parking and Loading* •Vehicle: No requirement •Bicycle: No requirement	NP	NP	NP	NP	NP	
	Sports and/or Entertainment Arena or Stadium*	NP	NP	NP	NP	L-ZP	§11.4.5.1
Nonresidential Uses in Existing Business Structures In Residential Zones)		NP	NP	not applicable			
Parking of Vehicles	Parking, Garage •No Parking Requirements	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Parking, Surface* •No Parking Requirements	L-ZP	P-ZP	P-ZP	NP	P-ZP	§ 11.4.8
Eating & Drinking Establishments	All Types •Vehicle: 3.75/ 1,000 s.f. GFA •Bicycle: 1/3,000 s.f. GFA (0/100)	NP	P-ZP	P-ZP	P-ZP	P-ZP	
Lodging Accommodations	Bed and Breakfast Lodging •Vehicle: 1/guest room or unit •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	P-ZP	P-ZP	P-ZP	P-ZP	
	Lodging Accommodations, All Others •Vehicle: 1/ guest room or unit •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	P-ZP	P-ZP	P-ZP	P-ZP	
Office	Dental / Medical Office or Clinic •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.4.10
	Office, All Others •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	P-ZP	P-ZP	P-ZP	P-ZP	

KEY: *= Need Not be Enclosed [ZPCIM = Zoning Permit with Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use
ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice
ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	M-RH-3	M-RX-3 M-RX-5 M-RX-5A	M-CC-5	M-MX-5	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX	APPLICABLE USE LIMITATIONS
Retail Sales, Service & Repair (Not Including Vehicle or Equipment Sales, Service & Repair)	Animal Sales and Services, Household Pets Only •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.4.12
	Animal Sales and Services, All Others •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/20,000 s.f. GFA (60/40)	NP	NP	NP	NP	L-ZP	§ 11.4.13.1
	Food Sales or Market •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	L-ZP	P-ZP	P-ZP	P-ZP	§ 11.4.14
	Pawn Shop	NP	NP	NP	NP	NP	
	Retail Sales, Service & Repair -- Outdoor* •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	NP	NP	NP	L-ZP	§ 11.4.16
	Retail Sales, Service & Repair - Firearms Sales •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	NP	P-ZP	NP	P-ZP	
	Retail Sales, Service & Repair, All Others •Vehicle: 1.875/ 1,000 s.f. GFA •Bicycle: 1/10,000 s.f. GFA (60/40)	NP	P-ZP	P-ZP	P-ZP	P-ZP	
Vehicle / Equipment Sales, Rentals, Service & Repair	Automobile Emissions Inspection Facility •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: No requirement	NP	NP	NP	NP	P-ZP	
	Automobile Services, Light •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.4.18; § 11.4.19
	Automobile Services, Heavy Vehicle: .5/ 1,000 s.f. GFA Bicycle: No requirement	NP	NP	L-ZP/ZPSE	NP	L-ZP/ZPSE	§ 11.4.18; § 11.4.20
	Automobile / Motorcycle / Light Truck Sales, Rentals, Leasing; Pawn Lot or Vehicle Auctioneer* •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.4.21
	Heavy Vehicle/ Equipment Sales, Rentals & Service* •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: No requirement	NP	NP	P-ZPSE	NP	L-ZP	§ 11.4.22
Communications and Information	Antennas Not Attached to a Tower* •No Parking Requirements	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.5.2
	Communication Services •Vehicle: .5/ 1,000 s.f. GFA •Bicycle: No requirement	NP	L-ZPSE P-ZP	L-ZPSE P-ZP	L-ZPSE P-ZP	P-ZP	§ 11.5.1
	Telecommunications Towers* •No Parking Requirements	L-ZP/ ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ZPSE	§ 11.5.2
	Telecommunications Tower - Alternative Structure* •No Parking Requirements	L-ZP/ ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	L-ZP/ZPIN	§ 11.5.2
	Telecommunication Facilities -- All Others* •No Parking Requirements	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	L-ZPIN	§ 11.5.2

KEY: *= Need Not be Enclosed [ZPCIM = Zoning Permit with Community Information Meeting](#) P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use
ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice
ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE • Vehicle Parking Reqmt: # spaces per unit of measurement • Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	M-RH-3	M-RX-3 M-RX-5 M-RX-5A	M-CC-5	M-MX-5	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX	APPLICABLE USE LIMITATIONS
Industrial Services	Contractors, Special Trade - General • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: No requirement	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.5.3.
	Contractors, Special Trade - Heavy/ Contractor Yard*	NP	NP	NP	NP	L-ZP	§ 11.5.4.1
	Food Preparation and Sales, Commercial • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: No requirement	NP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.5.5
	Laboratory, Research, Development and Technological Services • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: No requirement	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.5.6
	Service/Repair, Commercial • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: No requirement	NP	NP	L-ZP	L-ZP	L-ZP	§ 11.5.7
Manufacturing and Production	Manufacturing, Fabrication & Assembly -- Custom • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: No requirement	NP	L-ZPIN	L-ZP	L-ZP	L-ZP	§ 11.5.8
	Manufacturing, Fabrication & Assembly -- General • Vehicle: .5 / 1,000 s.f. GFA • Bicycle: No requirement	NP	NP	L-ZP/ZPSE	L-ZP/ZPSE	L-ZP/ZPSE	§ 11.5.9
	Manufacturing, Fabrication & Assembly -- Heavy	NP	NP	NP	NP	NP	
Mining & Extraction and Energy Producing Systems	Oil, Gas -- Production, Drilling*	NP	NP	NP	NP	L-ZP	§ 11.5.10.1
	Sand or Gravel Quarry*	NP	NP	NP	NP	L-ZP	§ 11.5.11.1
	Wind Energy Conversion Systems* • No Parking Requirements	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	L-ZPIN/ZPSE	§ 11.5.13
Transportation Facilities	Airport*	NP	NP	NP	NP	NP	
	Helipad, Heliport, Heliport* • No Parking Requirements	L-ZPIN	L-ZPIN	L-ZP	L-ZP	L-ZP	§ 11.5.14
	Railroad Facilities*	NP	NP	NP	NP	P-ZP	
	Railway Right-of-Way* • No Parking Requirements	P-ZP	P-ZP	P-ZP	P-ZP	P-ZP	
	Terminal, Station or Service Facility for Passenger Transit System • Vehicle: .5/ 1,000 s.f. GFA • Bicycle: No requirement	L-ZP	P-ZP	P-ZP	P-ZP	P-ZP	§ 11.5.15
	Terminal, Freight, Air Courier Services	NP	NP	NP	NP	L-ZP	§ 11.5.16.1
Waste Related Services	Automobile Parts Recycling Business*	NP	NP	NP	NP	NP	
	Junkyard*	NP	NP	NP	NP	NP	
	Recycling Center	NP	NP	NP	NP	L-ZPIN	§ 11.5.19.1
	Recycling Collection Station	NP	NP	NP	NP	P-ZP	
	Recycling Plant, Scrap Processor	NP	NP	NP	NP	NP	
	Solid Waste Facility	NP	NP	NP	NP	NP	
Wholesale, Storage, Warehouse & Distribution	Automobile Towing Service Storage Yard*	NP	NP	NP	NP	NP	
	Mini-storage Facility • Vehicle: 0.1 / 1,000 s.f. GFA • Bicycle: No requirement	NP	NP	P-ZP	L-ZP	P-ZP	§ 11.5.23
	Vehicle Storage, Commercial*	NP	NP	NP	NP	NP	

KEY: *= Need Not be Enclosed ZPCIM = Zoning Permit with Community Information Meeting P = Permitted Use without Limitations L = Permitted Use with Limitations NP = Not Permitted Use
ZP = Zoning Permit Review ZPIN = Subject to Zoning Permit Review with Informational Notice
ZPSE = Subject to Zoning Permit with Special Exception Review When no ZP, ZPIN, ZPSE listed = No Zoning Permit required

USE CATEGORY	SPECIFIC USE TYPE •Vehicle Parking Reqmt: # spaces per unit of measurement •Bicycle Parking Reqmt : # spaces per unit of measurement (% Required Spaces in Enclosed Facility /% Required Spaces in Fixed Facility)	M-RH-3	M-RX-3 M-RX-5 M-RX-5A	M-CC-5	M-MX-5	M-IMX-5 M-IMX-8 M-IMX-12 M-GMX	APPLICABLE USE LIMITATIONS
Wholesale, Storage, Warehouse & Distribution	Wholesale Trade or Storage, General •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	NP	NP	P-ZPIN	NP	P-ZP	
	Wholesale Trade or Storage, Light •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	NP	NP	L-ZP/ZPIN/ ZPSE	L-ZP/ZPIN/ ZPSE	P-ZP/ZPIN/ZPSE	§ 11.5.26
AGRICULTURE PRIMARY USE CLASSIFICATION							
Agriculture	Aquaculture*	NP	NP	NP	NP	L-ZP	§ 11.6.1
	Garden, Urban* •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.6.2
	Husbandry, Animal*	NP	NP	NP	NP	NP	
	Husbandry, Plant*	NP	NP	NP	NP	NP	
	Plant Nursery •Vehicle: .5 / 1,000 s.f. GFA •Bicycle: No requirement	NP	L-ZP	L-ZP	L-ZP	L-ZP*	§ 11.6.5
ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION							
Accessory to Primary Residential Uses (Parking is Not Required for Accessory Uses Unless Specifically Stated in this Table or in an Applicable Use Limitation)	Unlisted Accessory Uses	L - Applicable in all Zone Districts					§ 11.7
	Accessory Dwelling Unit	L-ZP	L-ZP	L-ZP	L-ZP	L-ZP	§ 11.7; § 11.8.2
	Domestic Employee	L	L	L	L	L	§ 11.7; § 11.8.3
	Garden*	L	L	L	L	L	§ 11.7; § 11.8.4
	Keeping of Household Animals*	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	L / L-ZPIN	§ 11.7; § 11.8.5
	Keeping and Off-Street Parking of Vehicles, Motorcycles, Trailers & Recreational Vehicles*	L	L	L	L	L	§ 11.7; § 10.9
	Kennel or Exercise Run*	L	L	L	L	L	§ 11.7; § 11.8.6
	Limited Commercial Sales, Services Accessory to Multi-Unit Dwelling Use	NP	L-ZP	Not Applicable - See Permitted Primary Uses			§ 11.7; § 11.8.7
	Outdoor Storage, Residential*	L	L	L	L	L	§ 11.7; § 11.8.8
	Second Kitchen Accessory to Single Unit Dwelling Use	L-ZP	L-ZP	L-ZP	L-ZP	NP	§ 11.7; § 11.8.9
	Short-term Rental	L	L	L	L	L	§ 11.7; § 11.8.10
	Vehicle Storage, Repair and Maintenance*	L	L	L	L	L	§ 11.7; § 10.9
	Wind Energy Conversion Systems*	L-ZPIN/ ZPSE	L-ZPIN/ ZPSE	Not Applicable - See Permitted Primary Uses			§ 11.7; § 11.5.13
	Yard or Garage Sales*	L	L	L	L	L	§ 11.7; § 11.8.11

HOME OCCUPATIONS ACCESSORY TO PRIMARY RESIDENTIAL USES USE CLASSIFICATION

ARTICLE 10. GENERAL DESIGN STANDARDS

3. Vehicle queuing spaces serving permitted fuel pumps where the spaces meet the dimensional standards for a 0° parking space as required in Section 10.4.6, may count toward the minimum required number of vehicle parking spaces.

B. Gross Floor Area for Purposes of Calculating Parking Amounts

For the purposes of complying with minimum and maximum parking requirements, gross floor area shall mean the sum of the gross horizontal areas of all of the floors of a building, including interior balconies and mezzanines, but excluding exterior balconies. All horizontal dimensions of each floor are to be measured by the exterior faces of walls of each such floor. The floor area of a building shall include the floor area of accessory buildings on the same zone lot, measured the same way. In computing gross floor area, the following shall be excluded:

1. Any floor area devoted to mechanical equipment serving the building, provided that the floor area of such use occupies not less than 75 percent of the floor area of the story in which such mechanical equipment is located;
2. Any floor area used exclusively as parking space for vehicles or bicycles; and
3. Any floor area that serves as a pedestrian mall or public access way to shops and stores.

C. "Unit" for Purposes of Calculating Parking Amounts

For the purposes of complying with minimum and maximum parking requirements, the term "unit" shall mean, as applicable, either:

1. A dwelling unit in a household living use, as "dwelling unit" is defined in Article 11, Use Limitations and Definitions; or
2. A habitable room, which may or may not contain kitchen or bathing facilities, intended for occupancy by a resident or guest in a group living Residential Care or Congregate Living use.

D. Guest Parking in Districts with Maximum Vehicle Parking Standards

1. Intent

To allow flexibility for a limited amount of guest parking in zone districts with maximum vehicle parking standards.

2. Applicability

This Section 10.4.4.2.D applies to all residential primary uses in zone districts where maximum vehicle parking standards apply.

3. Standards

- a. On a zone lot containing at least 3 and no more than 19 dwelling units, one additional vehicle parking space may be provided for guest parking.
- b. On a zone lot containing 20 or more dwelling units, one additional vehicle parking space may be provided for guest parking for every 20 dwelling units. For example, a 42-unit development may provide two additional parking spaces for guest parking.
- c. Except when shared parking is being provided on a separate zone lot according to Section 10.4.5.4, Shared Vehicle Parking, all guest parking must be located on the same zone lot as the residential primary use for which it is being provided.

10.4.4.3 Accessible Vehicle Parking

All primary uses subject to this Division 10.4 shall provide accessible parking for disabled persons that complies with the Denver Building and Fire Code and with the Americans with Disabilities Act (ADA) standards, provided, however, that the amount of accessible parking provided for multi-unit dwelling uses shall be no less than one (1) space for each dwelling unit constructed for occupancy by a disabled person.

D. Preservation of Existing Trees

If, in order to comply with standards in this Article 10 for the landscaping of parking areas and with this Division 10.4. Parking and Loading, it would be necessary to remove mature, existing trees, the Zoning Administrator may allow reasonable reductions in either (1) the size of required landscaped areas (for the purpose of accommodating the required parking), or (2) the number of required parking spaces. Requests for this exception from the minimum parking requirements shall be reviewed according to Section 12.4.5, Administrative Adjustment.

10.4.5.2 Alternative Minimum Vehicle Parking Ratios

The following uses are allowed alternative minimum vehicle parking ratios instead of the minimum parking ratios otherwise required by this Code, but only to the extent specified in Section 10.4.5.2.

A. General Provisions Applicable to All Alternative Minimum Vehicle Parking Ratios

1. Alternative Minimum Vehicle Parking Ratios Not Applicable to Accessible Parking

The number of required accessible parking spaces shall be calculated based on the minimum number of vehicle parking spaces required for the subject land use in the applicable Use and Parking Table before application of an eligible alternative minimum vehicle parking ratio. The number of required accessible parking spaces shall not be calculated based on alternative minimum vehicle parking ratios.

2. No Combination with Reductions

A vehicle parking reduction permitted in accordance with Section 10.4.5.3 shall not be taken in combination with use of an alternative minimum vehicle parking ratio provided in Section 10.4.5.2.

- a. For example: A Zone Lot in a Main Street zone district includes 100 affordable housing units and office Primary Uses. The affordable housing use applies the alternative minimum vehicle parking ratio of 0.25 vehicle parking spaces per unit for a parking requirement of 25 required vehicle parking spaces. The vehicle parking requirement for the office Primary Use may be reduced in accordance with the vehicle parking reductions provided in Section 10.4.5.3, but the alternative minimum vehicle parking requirement for the affordable housing units may not be reduced further.

B. Alternative Minimum Vehicle Parking Ratios Allowed

The Zoning Administrator shall allow an applicant to apply an alternative minimum vehicle parking ratio upon finding that the additional requirements ~~and special review process~~ stated in the following table have been met:

TYPE OF ALTERNATIVE	APPLICABLE ZONE DISTRICTS	APPLICABLE USE	ADDITIONAL REQUIREMENTS	ALTERNATIVE ALLOWED	SPECIAL REVIEW PROCESS
Affordable Housing	All Main Street Zone Districts	Primary Residential Uses	Housing that is affordable for persons with 40 percent area median income and below	Alternative minimum vehicle parking ratio of 0.25 vehicle parking spaces per unit	n/a
Small Dwelling Units	All Main Street Zone Districts	Primary Residential Uses	Dwelling Units that are under 550 square feet in gross floor area may utilize this reduction	Alternative minimum vehicle parking ratio of 0.25 vehicle parking spaces per unit	n/a
<u>Shelters</u>	<u>All Zone Districts</u>	<u>Primary Residential Care Use</u>	<u>Residential Care Uses that provide temporary housing or shelter primarily to guests who are or who are at risk of homelessness</u>	<u>Alternative minimum vehicle parking ratio of 0.125 vehicle parking spaces per 1,000 sf GFA</u>	n/a

TYPE OF ALTERNATIVE	APPLICABLE ZONE DISTRICTS	APPLICABLE USE	ADDITIONAL REQUIREMENTS	ALTERNATIVE ALLOWED	SPECIAL REVIEW PROCESS
Single-Room-Occupancy (SRO) Hotel	All Zone Districts	Single-Room-Occupancy (SRO) Hotel Primary Use	n/a	Alternative minimum vehicle parking ratio of 0.25 vehicle parking spaces per unit	n/a
Rooming and Boarding House Congregate Living	All Main Street Zone Districts	Rooming and Boarding House Congregate Living Primary Use	n/a	Alternative minimum vehicle parking ratio of 0.25 vehicle parking spaces per unit	n/a
Senior Housing	All Main Street Zone Districts	Residence for Older Adults Primary Use	n/a	Alternative minimum vehicle parking ratio of 0.25 vehicle parking spaces per unit	n/a
Other Housing	All Main Street Zone Districts	Primary Residential Uses	Other special needs housing with similar reduced parking demands, as approved by the Zoning Administrator	Alternative minimum vehicle parking ratio of 0.25 vehicle parking spaces per unit	n/a

10.4.5.3 Vehicle Parking Reductions

A. General Provisions Applicable to All Vehicle Parking Reduction Allowances

1. Calculation

In determining the total number of required vehicle parking spaces that may be reduced through any one or combination of this Section's permitted reductions, calculations shall be based on the minimum number of required vehicle parking spaces using the ratio contained in the applicable Use and Parking Table, and not based on an alternative minimum vehicle parking ratio pursuant to Section 10.4.5.2.

2. Reductions Not Applicable to Accessible Parking

The number of required accessible parking spaces shall not be reduced, and the number of required accessible parking spaces shall be calculated based on the minimum number of vehicle parking spaces required not including any reduction.

3. No Combination with Alternative Minimum Vehicle Parking Ratios

A vehicle parking reduction permitted in accordance with Section 10.4.5.3 shall not be taken in combination with use of an alternative minimum vehicle parking ratio provided in Section 10.4.5.2.

a. For example: A Zone Lot in a Main Street zone district includes 100 affordable housing units and office Primary Uses. The affordable housing use applies the alternative minimum vehicle parking ratio of 0.25 vehicle parking spaces per unit for a parking requirement of 25 required vehicle parking spaces. The vehicle parking requirement for the office Primary Use may be reduced in accordance with the vehicle parking reductions provided in Section 10.4.5.3, but the alternative minimum vehicle parking requirement for the affordable housing units may not be reduced further.

4. Maximum Reduction Allowed

a. The total number of vehicle parking spaces required on a zone lot shall not be reduced by more than 50% under any one or combination of this subsection's permitted reductions, with the following exceptions:

i. Vehicle parking reductions for small lots in the C-CCN zone districts provided in Section 10.4.5.3.C.

- i. No more than two required loading spaces may be located on the public right-of-way;
- ii. The spaces shall not create any adverse impacts on traffic or pedestrian movement;
- iii. Public Works must approve the loading space(s); and
- iv. At least one of the following shall be provided on the subject property zone lot:
 - a) One loading space that is 10 feet wide and 26 feet long; or
 - b) Two loading spaces that are each 10 feet wide and 20 feet long.

10.4.8.4 Maintenance

All off-street loading space shall be maintained in compliance with the regulations for the maintenance of off-street parking space according to Section 10.4.7, Use and Maintenance of Parking Areas.

SECTION 10.4.9 PARKING CATEGORIES

10.4.9.1 Vehicle Parking Categories

A. Purpose

Parking categories are used to determine the minimum amount of parking spaces required for a specific primary use.

B. Unclassified Uses

If for any reason the parking category of any primary use cannot be determined for the purpose of establishing the number of required vehicle parking spaces, the parking category of such use shall be determined by the Zoning Administrator according to Section 12.4.6, Code Interpretations and Determination of Unlisted Uses.

C. Parking Category Table

The following parking categories apply to all primary uses permitted by this Code.

USE CATEGORY	SPECIFIC PRIMARY USE	PARKING CATEGORY
Residential		
Household Living	Dwelling, Single Unit	<u>5 or fewer adults:</u> No Requirement <u>6 or more adults:</u> Large Single Unit
	Dwelling, Two Unit (includes provision of two units on one zone lot in a tandem house form)	Multi-Unit
	Dwelling, Multi-Unit	Multi-Unit
	Dwelling, Mixed Use	Multi-Unit
	Dwelling, Live / Work	Multi-Unit
Residential Care	<u>Residential Care, Type 1</u>	<u>Residential Low</u>
	<u>Residential Care, Type 2</u>	<u>Residential Low</u>
	<u>Residential Care, Type 3</u>	<u>Residential Low</u>
	<u>Residential Care, Type 4</u>	<u>Residential Low</u>
Congregate Living	All Types	<u>Residential Medium</u>

USE CATEGORY	SPECIFIC PRIMARY USE	PARKING CATEGORY
Group Living	Assisted Living Facility	Residential Medium
	Community Correctional Facility	Residential Low
	Nursing Home, Hospice	Residential Medium
	Residence for Older Adults	Residential Medium
	Residential Care Use, Small or Large	Residential Low
	Rooming and Boarding House	Commercial High
	Shelter for the Homeless	Commercial Low
	Student Housing	Multi-Unit
Civic, Public and Institutional		
Basic Utilities	Utility, Major Impact	Commercial Low
	Utility, Minor Impact*	Commercial Low
Community/Public Services	Community Recreational Facility	Public Use Medium
	Day Care Center	Public Use Medium
	Postal Facility	Commercial Medium
	Public Safety Facility	Public Use Medium
	Hospital	Public Use High
	Correctional Institution	Public Use Medium
Cultural/Special Purpose/Public Parks & Open Space	Cemetery	No Requirement
	Library	Public Use Medium
	Museum	Public Use Medium
	Performing Arts Center	Public Use Medium
	City Park	No Requirement
	Open Space - Recreation	Public Use Low
	Open Space - Conservation	No Requirement
Education	Elementary School	Public Use Medium
	Secondary School	Public Use High
	University or College	Public Use Medium
	Vocational or Professional School	Public Use Medium
Public and Religious Assembly	All Types	Public Use Medium
Commercial Sales, Services and Repair		
Adult Business	All Types	Commercial Medium
Arts, Entertainment & Recreation	Recreation and Entertainment Services, Indoor	Commercial Medium
	Recreation and Entertainment Services, Outdoor	Commercial Medium
	Sports and/or Entertainment Arena or Stadium	Public Use Medium
	Theater and/or Performance Space	Public Use Medium
Parking of Vehicles	Parking, Garage	No Requirement
	Parking, Surface	No Requirement
Eating & Drinking Establishments	All Types	Commercial High
Lodging Accommodations	Bed and Breakfast Lodging	Commercial Medium
	Lodging Accommodations, All Others	Commercial Medium
Office	Dental / Medical Office or Clinic	Commercial Medium
	Office, All Others	Commercial Medium

USE CATEGORY	SPECIFIC PRIMARY USE	PARKING CATEGORY
Wholesale, Storage, Warehouse & Distribution	Automobile Towing Service Storage Yard	Commercial Low
	Contractors, Special Trade - Heavy, Yard	Commercial Low
	Container Storage (Mini-Storage)	Commercial Low
	Heavy Equipment Sales or Rentals	Commercial Low
	Storage Services	Commercial Low
	Vehicle Storage, Commercial	Commercial Low
	Wholesale Trade, General, and/or Storage of Toxic and/or Hazardous Materials	Commercial Low
	Wholesale Trade, Light, and/or Storage of Nontoxic and/or Nonhazardous Materials	Commercial Low
Agriculture		
Agriculture	Aquaculture	Commercial Low
	Garden, Urban	Commercial Low
	Husbandry, Animal	Commercial Low
	Husbandry, Plant	Commercial Low
	Plant Nursery	Commercial Low

10.4.9.2 Bicycle Parking Categories

Bicycle parking is required based on the specific primary use's assigned parking category, according to Section 10.4.9.1, Vehicle Parking Categories. The bicycle parking standards are then varied by neighborhood context, as set forth in the tables below.

SUBURBAN NEIGHBORHOOD CONTEXT AND I-A, -B ZONE DISTRICTS		
Parking Category	Minimum Bicycle Parking Spaces Required	% Parking Spaces Provided in Enclosed Bicycle Parking Facility /Fixed Bicycle Rack Parking Facility
<u>Large Single Unit</u>	<u>No Requirement</u>	<u>n/a</u>
Multi-unit	1/5 units	80%/20%
Residential Low	No Requirement	n/a
Residential Medium	No Requirement	n/a
Commercial High	1/5,000 sq. ft. GFA	0%/100%
Commercial Medium	1/20,000 sq. ft. GFA	60%/40% Retail, sales, service and repair uses: 20%/80%
Commercial Low	No Requirement	n/a
Public Use High	1/20,000 sq. ft. GFA	0%/100%
Public Use Medium	1/10,000 sq. ft. GFA	0%/100%
Public Use Low	No Requirement	n/a

URBAN EDGE NEIGHBORHOOD CONTEXT		
Parking Category	Minimum Bicycle Parking Spaces Required	% Parking Spaces Provided in Enclosed Bicycle Parking Facility /Fixed Bicycle Rack Parking Facility
<u>Large Single Unit</u>	<u>No Requirement</u>	<u>n/a</u>
Multi-unit	1/5 units	80%/20%
Residential Low	No Requirement	n/a
Residential Medium	No Requirement	n/a
Commercial High	1/5,000 sq. ft. GFA	0%/100%
Commercial Medium	1/20,000 sq. ft. GFA	60%/40% Retail, sales, service and repair uses: 20%/80%
Commercial Low	No Requirement	n/a
Public Use High	1/20,000 sq. ft. GFA	0%/100%

URBAN EDGE NEIGHBORHOOD CONTEXT		
Parking Category	Minimum Bicycle Parking Spaces Required	% Parking Spaces Provided in Enclosed Bicycle Parking Facility /Fixed Bicycle Rack Parking Facility
Public Use Medium	1/10,000 sq. ft. GFA	0%/100%
Public Use Low	No Requirement	n/a

URBAN NEIGHBORHOOD CONTEXT AND MASTER PLANNED CONTEXT		
Parking Category	Minimum Bicycle Parking Spaces Required	% Parking Spaces Provided in Enclosed Bicycle Parking Facility /Fixed Bicycle Rack Parking Facility
<u>Large Single Unit</u>	<u>No Requirement</u>	n/a
Multi-unit	1/4 units	80%/20%
Residential Low	No Requirement	n/a
Residential Medium	No Requirement	n/a
Commercial High	1/3,000 sq. ft. GFA	0%/100%
Commercial Medium	1/10,000 sq. ft. GFA	60%/40% Retail, sales, service and repair uses: 20%/80%
Commercial Low	No Requirement	n/a
Public Use High	1/10,000 sq. ft. GFA	0%/100%
Public Use Medium	1/10,000 sq. ft. GFA	0%/100%
Public Use Low	No Requirement	n/a

GENERAL URBAN NEIGHBORHOOD CONTEXT AND ALL I-MX ZONE DISTRICTS		
Parking Category	Minimum Bicycle Parking Spaces Required	% Parking Spaces Provided in Enclosed Bicycle Parking Facility /Fixed Bicycle Rack Parking Facility
<u>Large Single Unit</u>	<u>No Requirement</u>	n/a
Multi-unit	1/4 units	80%/20%
Residential Low	No Requirement	n/a
Residential Medium	No Requirement	n/a
Commercial High	1/3,000 sq. ft. GFA	0%/100%
Commercial Medium	1/10,000 sq. ft. GFA	60%/40% Retail, sales, service and repair uses: 20%/80%
Commercial Low	No Requirement	n/a
Public Use High	1/10,000 sq. ft. GFA	0%/100%
Public Use Medium	1/10,000 sq. ft. GFA	0%/100%
Public Use Low	No Requirement	n/a

URBAN CENTER NEIGHBORHOOD CONTEXT AND CAMPUS ZONE DISTRICTS		
Parking Category	Minimum Bicycle Parking Spaces Required	% Parking Spaces Provided in Enclosed Bicycle Parking Facility /Fixed Bicycle Rack Parking Facility
<u>Large Single Unit</u>	<u>No Requirement</u>	n/a
Multi-unit	1/2 units	80%/20%
Residential Low	No Requirement	n/a
Residential Medium	No Requirement	n/a
Commercial High	1/1,500 sq. ft. GFA	0%/100%
Commercial Medium	1/7,500 sq. ft. GFA	60%/40% Retail, sales, service and repair uses: 20%/80%
Commercial Low	No Requirement	n/a
Public Use High	1/5,000 sq. ft. GFA	0%/100%
Public Use Medium	1/10,000 sq. ft. GFA	0%/100%
Public Use Low	No Requirement	n/a

DOWNTOWN NEIGHBORHOOD CONTEXT - D-LD, D-GT, D-AS, D-AS-12+, D-AS-20+ ZONE DISTRICTS ONLY		
Parking Category	Minimum Bicycle Parking Spaces Required	% Parking Spaces Provided in Enclosed Bicycle Parking Facility /Fixed Bicycle Rack Parking Facility
<u>Large Single Unit</u>	<u>No Requirement</u>	<u>n/a</u>
Multi-unit	1/2 units	80%/20%
Residential Low	No Requirement	n/a
Residential Medium	No Requirement	n/a
Commercial High	1/1,000 sq. ft. GFA	0%/100%
Commercial Medium	1/7,500 sq. ft. GFA	60%/40% Retail, sales, service and repair uses: 20%/80%
Commercial Low	No Requirement	n/a
Public Use High	1/5,000 sq. ft. GFA	0%/100%
Public Use Medium	1/10,000 sq. ft. GFA	0%/100%
Public Use Low	No Requirement	n/a

DOWNTOWN NEIGHBORHOOD CONTEXT - D-CPV-T, D-CPV-R, D-CPV-C ZONE DISTRICTS ONLY		
Parking Category	Minimum Bicycle Parking Spaces Required	% Parking Spaces Provided in Enclosed Bicycle Parking Facility/Fixed Bicycle Rack Parking Facility
<u>Large Single Unit</u>	<u>No Requirement</u>	<u>n/a</u>
Multi-unit	1.1/unit	80%/20%
Residential Low	No Requirement	n/a
Residential Medium	No Requirement	n/a
Commercial High	1/1,000 sq. ft. GFA	0%/100%
Commercial Medium	1/4,000 sq. ft. GFA Lodging accommodations uses: 1/7,500 sq. ft. GFA	60%/40% Retail, sales, service and repair uses: 20%/80%
Commercial Low	No Requirement	n/a
Public Use High	1/5,000 sq. ft. GFA	0%/100%
Public Use Medium	1/5,000 sq. ft. GFA	0%/100%
Public Use Low	No Requirement	n/a



DIVISION 10.9 PARKING, KEEPING AND STORAGE OF VEHICLES

SECTION 10.9.1 PARKING / STORAGE ON RESIDENTIAL ZONE LOTS

The parking/storage on a residential zone lot in a Residential Zone District of any of the following vehicles is prohibited, except that such vehicles may be parked on a residential zone lot only to render services to the subject zone lot and only for the duration necessary to render such services:

- 10.9.1.1 Tow trucks;
- 10.9.1.2 Large-Scale Motor Vehicles and Trailers;
- 10.9.1.3 Stake body trucks;
- 10.9.1.4 Cube or box vans;
- 10.9.1.5 Backhoes;
- 10.9.1.6 Vehicles towing trailers carrying machinery and supplies; or
- 10.9.1.7 Other similar specialized vehicles.

SECTION 10.9.2 PARKING OF VEHICLES ON PUBLIC RIGHT-OF-WAY ADJACENT TO RESIDENTIAL USES

The vehicles listed below are prohibited from parking for a period of time longer than that noted below during any given week on a public right-of-way abutting any zone lot in a Residential Zone District, or which contains a single unit dwelling use or multi-unit dwelling use. This prohibition does not apply where such vehicle is engaged in rendering services in the immediate area, or where such vehicle is parked adjacent to a motel or hotel where the vehicle operator is a guest.

- 10.9.2.1 A 2-hour period:
 - A. A truck exceeding 6,000 pounds empty weight; or
 - B. A bus exceeding 6,000 pounds empty weight or 22 feet in length; or
 - C. An automobile trailer not attached to a licensed vehicle; or
 - D. A truck-tractor or semi-trailer; or
 - E. A disabled or inoperable vehicle.
- 10.9.2.2 A 24 hour period:
 - A. A truck with an attached camper having a combined overall length exceeding 22 feet; or
 - B. A recreational vehicle exceeding 22 feet in length; or
 - C. An automobile trailer attached to a licensed vehicle.

SECTION 10.9.3 KEEPING OF MOTOR VEHICLES ACCESSORY TO A DWELLING UNIT

10.9.3.1 Number of Motor Vehicles Accessory to a Dwelling Unit

On any zone lot occupied by a dwelling unit, there shall be, in total, parked and/or stored no more than 1 motor vehicle per licensed driver residing in the dwelling unit plus 1 additional motor vehicle per dwelling unit, to a maximum of 6 vehicles per dwelling unit, except as specifically allowed by this Code. on any public right-of-way bordering or within the same block on which the dwelling unit is located, or on any public right-of-way bordering or within all adjoining blocks, there shall

~~be, in total, parked and/or stored no more than 1 motor vehicle per licensed driver residing in the dwelling unit plus 1 additional motor vehicle per dwelling unit, except as specifically allowed by this Code.~~

10.9.3.2 Number of Trailers Permitted on a Zone Lot Containing a Single Unit Dwelling

Trailers shall be limited by the following:

- A. Permitted number: 2;
- B. Maximum length: 22 feet; and
- C. Each trailer shall be designed to have and be used for a substantially different purpose.

10.9.3.3 Number of Motorcycles Accessory to a Dwelling Unit

On any zone lot occupied by a dwelling unit, there shall be parked and/or stored no more than one motorcycle per driver licensed to operate a motorcycle residing in such dwelling unit plus one additional motorcycle per dwelling unit. Such motorcycles shall be in addition to the total number of motor vehicles allowed above.

10.9.3.4 Motor Vehicle Repair and Maintenance Accessory to a Dwelling Unit

- A. Occupants of a dwelling unit may perform engine, transmission and other similar repairs of their personally owned motor vehicles from 8:00 a.m. to 9:00 p.m. inside a completely enclosed garage structure located on the same zone lot as the dwelling unit, excluding, however, any auto body and fender work, or the painting of motor vehicles;
- B. Occupants of a dwelling unit shall not repair motor vehicles belonging to another person or persons that do not reside in the same dwelling unit;
- C. Occupants of a dwelling unit may perform customary maintenance on their personally owned motor vehicles from 8:00 a.m. to 9:00 p.m. outdoors on a driveway or Off-Street Parking Area located on the same lot as the dwelling unit. For the purpose of this Section "customary maintenance" is defined as: washing; polishing; fluid changes; greasing; tire changing; brake repair; muffler replacement; engine tune-up; flushing of radiators; and other activities of minor repair and servicing;
- D. Occupants of a dwelling unit performing vehicle maintenance and repair shall not permit vehicle fluids to be discharged onto any land, driveway or Off-Street Parking Area; and
- E. Occupants of a dwelling unit shall immediately remove all external evidence of vehicle repair and maintenance activities.

10.9.3.5 Parking or Storage of Inoperable Vehicles in Residential Zone Districts

The parking or storage of inoperable motor vehicles in any residential zone district shall be limited by all of the following:

- A. Occupants of a dwelling unit may store their personally owned inoperable motor vehicle and/or auto parts on the same zone lot as the dwelling unit, provided, however, that said vehicle and/or auto parts shall be stored inside a completely enclosed garage structure;
- B. Parked or stored inoperable motor vehicles shall not occupy off-street parking spaces required by this Division;
- C. Parked or stored inoperable motor vehicles are limited to one such vehicle per dwelling unit; and
- D. Parked or stored inoperable motor vehicles shall be included in the calculation of the total maximum number of vehicles permitted for a dwelling unit.

ARTICLE 11. USE LIMITATIONS AND DEFINITIONS

Contents

ARTICLE 11. USE LIMITATIONS AND DEFINITIONS

DIVISION 11.1	GENERAL PROVISIONS.....	11.1-1
Section 11.1.1	Intent.....	11.1-1
Section 11.1.2	Applicability.....	11.1-1
Section 11.1.3	Organization	11.1-1
Section 11.1.4	Enclosure of Uses.....	11.1-1
DIVISION 11.2	RESIDENTIAL PRIMARY USE LIMITATIONS	11.2-1
Section 11.2.1	Dwelling, Single Unit	11.2-1
Section 11.2.2	Dwelling, Two Unit	11.2-1
Section 11.2.3	Dwelling, Multi-Unit.....	11.2-2
Section 11.2.4	Dwelling, Live/Work	11.2-3
Section 11.2.5	All Household Living Uses in C-CCN Zone Districts	11.2-4
Section 11.2.6	All Household living uses	11.2-5
Section 11.2.7	<u>Assisted Living Facility</u> <u>All Residential Care Uses</u>	11.2-5
Section 11.2.8	<u>Residence for Older Adults</u> <u>Type 1 Residential Care</u>	11.2-5
Section 11.2.9	<u>Residential Care Use, Small or Large</u> <u>Type 2 Residential Care</u>	11.2-6
Section 11.2.10	<u>Community Corrections Facility</u> <u>Type 3 Residential Care</u>	11.2-9
Section 11.2.11	<u>Shelter for the Homeless</u> <u>Type 4 Residential Care</u>	11.2-10
Section 11.2.12	<u>Emergency Provisions.....</u>	<u>11.2-8</u>
DIVISION 11.3	CIVIC, PUBLIC AND INSTITUTIONAL PRIMARY USE LIMITATIONS 11.3-1	
Section 11.3.1	Utility, Major Impact.....	11.3-1
Section 11.3.2	Utility, Minor Impact	11.3-2
Section 11.3.3	Community Center	11.3-2
Section 11.3.4	Day Care Center	11.3-3
Section 11.3.5	Public Safety Facility.....	11.3-3
Section 11.3.6	Cemetery.....	11.3-4
Section 11.3.7	Cultural/Special Purpose/Public Parks & Open Space Uses	11.3-4
Section 11.3.8	Elementary or Secondary School, University or College, Vocational or Professional School	11.3-5
Section 11.3.9	University or College	11.3-5
Section 11.3.10	Public or Religious Assembly, All Types.....	11.3-5
DIVISION 11.4	COMMERCIAL SALES, SERVICE AND REPAIR PRIMARY USE LIMITATIONS	11.4-1
Section 11.4.1	Arts, Entertainment and Recreation Uses	11.4-1
Section 11.4.2	Arts, Recreation and Entertainment Services, Indoor	11.4-2
Section 11.4.3	Arts, Recreation and Entertainment Services, Outdoor	11.4-2
Section 11.4.4	Event Space With Alternate Parking and Loading	11.4-2
Section 11.4.5	Sports and/or Entertainment Arena or Stadium	11.4-4
Section 11.4.6	Nonresidential Uses in Existing Business Structures in Residential Zones.....	11.4-4
Section 11.4.7	Parking, Garage.....	11.4-6
Section 11.4.8	Parking, Surface	11.4-6
Section 11.4.9	Eating and Drinking Establishments, All Types.....	11.4-7
Section 11.4.10	Dental/Medical Office or Clinic	11.4-8
Section 11.4.11	Retail Sales, Service and Repair, All Types	11.4-8
Section 11.4.12	Animal Services and Sales, Household Pets Only	11.4-9
Section 11.4.13	Animal Services and Sales, All Others	11.4-10
Section 11.4.14	Food Sales or Market	11.4-10
Section 11.4.15	Pawn Shop.....	11.4-10
Section 11.4.16	Retail Sales, Services and Repair, Outdoor	11.4-10

- A. There is an existing structure that was erected as a multiple unit dwelling prior to July 1, 2004, has not had its nonconforming use terminated, and is not a neglected or derelict building under the provisions of Article IX (neglected and derelict buildings), Chapter 10 (buildings and building regulations) of the Denver Revised Municipal Code.
- B. Future rebuilds, physical modifications, alterations, and/or additions to the structure containing the multiple unit dwelling use shall comply with the provisions of this Code as it applies to a building form allowed in the G-MU-3 zone districts.
- C. Accessory uses, accessory structures, home occupations, parking of vehicles and permitted signs shall be regulated by this Code as it applies to a multi-unit dwelling use in the G-MU-3 zone districts.
- D. A multi-unit dwelling use in an I-A or I-B zone districts shall be subject to the same limitations as a multi-unit dwelling use located in any Residential Zone District.
- E. The external effects of such uses shall be regulated by Division 10.11, Limitations on External Effects of Uses and shall not be exempt from these provisions due to the industrial zoning.
- F. The zone lot containing a multi-unit dwelling use shall be used and operated in its entirety as a residential use. Such zone lots shall not be amended.

11.2.3.3 U-TU-B2 Zone District

In the U-TU-B2 zone districts, where permitted with limitations, new Multi-Unit Dwelling uses may be established only on corner zone lots where at least one of the intersecting streets is a collector or arterial street, according to the functional street classifications adopted by the Public Works Department.

SECTION 11.2.4 DWELLING, LIVE/WORK

11.2.4.1 All Zone Districts (Except I-A, I-B Zone Districts)

In all zone districts, except in the I-A, I-B zone districts, where permitted with limitations, a Live/Work Dwelling's commercial activity may be any nonresidential primary use permitted in the same zone districts that the Live/Work Dwelling is established, subject to compliance with this subsection's limitations. In addition, the following commercial activities, when not otherwise specifically listed as permitted in the applicable zone districts, are permitted in a Live/Work Dwelling use:

- A. Art gallery;
- B. Artist studio;
- C. Professional studio;
- D. Office, not including dental/medical office and clinic; and
- E. Other similar activities as determined by the Zoning Administrator according to Section 12.4.6, Code Interpretations and Determination of Unlisted Uses.

11.2.4.2 I-A, I-B Zone Districts

In the I-A, I-B zone districts, where permitted with limitations:

- A. A Live/Work Dwelling's commercial activity shall be limited to an Artist Studio use only.
- B. ~~The dwelling portion of a Live/Work Dwelling use shall be occupied by no more than 4 unrelated persons, or by any number of persons related by blood, marriage, or adoption.~~
- C. A Live/Work Dwelling use shall not be considered a "Residential Use" or "Residential Zone District" or "Protected District," nor in any other way be accorded residential protection (e.g., separation) against the effects of surrounding industrial uses as may otherwise be required by this Code.

SECTION 11.2.6 ALL HOUSEHOLD LIVING USES

11.2.6.1 Kitchens

In all zone districts, where permitted with limitations, all Household Living use types shall comply with the following limitations:

- A. A Dwelling Unit occupied by a Household Living use shall contain either a Full Kitchen and/or Partial Kitchen, as further limited by this Section 11.2.6.
- B. Consistent with the purpose of a single Dwelling Unit housing a single Household, more than one Full Kitchen is prohibited in any Dwelling Unit containing a Household Living use with the following exceptions:
 1. At any time after a Full Kitchen is established as part of a Single-Dwelling Unit use, the addition of an additional Full Kitchen is prohibited unless otherwise expressly allowed by this Code, or by a separate zoning permit obtained for a second Full Kitchen according to Section 11.8.9, Second Kitchen Accessory to Single Unit Dwelling Use, or the additional Full Kitchen it is part of an allowed Accessory Dwelling Unit use.
 2. An unenclosed area that may be covered but is permanently open to the outdoors on at least two sides, and otherwise meeting the definition of Full Kitchen is allowed.
- C. A Dwelling Unit occupied by a Multi-Unit Dwelling use or Live/Work Dwelling use and originally permitted with only a Partial Kitchen, may be permitted to convert the Partial Kitchen to a Full Kitchen or to add no more than one Full Kitchen to the Dwelling Unit.
- D. Any Household Living use may include both one Full Kitchen and one or more Partial Kitchens.
- E. When a Kitchen is a "Full Kitchen" solely because of the presence of a 220 volt or greater electrical outlet or a gas line connection, the Zoning Administrator may determine the Kitchen is a "Partial Kitchen" if the Applicant can evidence that the electrical outlet or gas line connection is not designed or intended to service a stove/cooktop or range. Evidence to be considered may include, but is not limited to, the specific location or arrangement of the subject Room within the larger Dwelling Unit, the lack of any other common indicators of a Kitchen (such as but not limited to countertops, sink, garbage disposal, refrigerator), and proximity of the electrical outlet or gas line connection to food preparation/cooking/storage appliances or areas.

RESIDENTIAL CARE USE CATEGORY

SECTION 11.2.7 ALL RESIDENTIAL CARE USES

11.2.7.1 All Zone Districts

In all zone districts, where permitted with limitations:

A. Intent

The intent of these limitations for Residential Care uses is:

1. To support and reinforce the viability and socioeconomic diversity of neighborhoods and communities that provide healthy environments for all their residents;
2. To encourage distribution of Residential Care facilities throughout the city and prevent concentration of larger facilities to ensure all neighborhood residents can reap the benefits of residential surroundings and equitable access to community resources such as transit and employment opportunities;
3. To increase location opportunities for critically needed Residential Care facilities;

4. To comply with the principles, policies and regulations of federal and state fair housing legislation;
5. To establish an ongoing, effective process of communication between local neighborhood residents, the operators of Residential Care facilities and city agencies that regulate such facilities;

B. Limitations Applicable To All Residential Care Uses

1. The applicant and the owner have obtained or will obtain any license or certification required by the state and/or the City, where applicable.
2. A Residential Care use housing non-paroled individuals under correctional supervision shall be operated by the Denver Manager of Safety, or according to an executed agreement with the Denver Manager of Safety.
3. A Residential Care use that is operated less than 24 hours per day (such as a facility providing only overnight emergency shelter) shall comply with the following standards:
 - a. Waiting areas shall be placed and supervised so that the operation of the Residential Care use will not create obstructions in adjacent public rights-of-way.
 - b. A Residential Care uses that is closed during the day (such as overnight shelters) shall make restroom facilities available during hours when the Residential Care use is closed. Such facilities may include temporary or mobile restroom facilities provided by the City.

C. Continuation of Certain Existing Residential Care Uses

1. A Residential Care use that was legally established and Continuously Maintained prior to [insert effective date of ordinance] will be considered a conforming use, subject to the following limitations:
 - a. The Zone Lot may be enlarged in compliance with the building form standards of at least one primary building form allowed in the zone district.
 - b. A structure containing such use may be expanded, modified, or demolished and rebuilt in compliance with the building form standards of a primary building form allowed in the zone district.
 - c. The number of residents or guests shall not be increased.
2. In zone districts that allow more than one primary use on a single zone lot, new primary uses can be established where permitted in conformance with Section 11.2.7, All Residential Care Uses, even when an existing Residential Care use is limited by this Section 11.2.7.1.C, Continuation of Certain Existing Residential Care Uses.
3. An increase in the number of guests permitted in a Residential Care use subject to this Section 11.2.7.1.C, Continuation of Certain Existing Residential Care Uses is allowed for up to 10 days due to emergencies according to Section 11.2.12.1, Short-term Emergency Expansion of a Residential Care Use.

D. Measurement of Distance for Spacing Limitations

1. Where required for a specific Residential Care use by Sections 11.2.8, 11.2.9, 11.2.10 and 11.2.11 below, distance shall be measured from the proposed Residential Care use, according to the rule of measurement in Section 13.1.11.1, Measurement of Separation or Distance Between Uses.
2. Where required, Spacing Limitations shall comply with the zone district in which the subject Residential Care use is located.

SECTION 11.2.8 TYPE 1 RESIDENTIAL CARE USES

11.2.8.1 Type 1 Residential Care Use Operated by a Religious Assembly Use

In all zone districts, where permitted with limitations, Type 1 Residential Care uses operated by a religious assembly use (a "religious assembly" use is defined in Article 11) shall be operated according to provisions of Section 11.2.7.1.B, Limitations Applicable to All Residential Care Uses, without the requirement for a zoning permit. Any change in operation or expansion that exceeds the permitted number of guests or limit on days of operation set forth in Section 11.12.2.3.B.1, Specific Residential Care Use Types, Type 1, shall require a zoning permit and compliance with all the requirements of the applicable provisions of Section 11.2.7. Type 1, Type 2, Type 3, or Type 4 Residential Care Use.

SECTION 11.2.9 TYPE 2 RESIDENTIAL CARE USES

11.2.9.1 All SU, TU and RH Zone Districts

In all SU, TU and RH zone districts, where permitted with limitations, all Type 2 Residential Care uses shall also comply with the following limitations:

- A. A proposed Type 2 Residential Care use shall be located a minimum of 1,200 feet from any other Residential Care use, when the proposed Residential Care use is located on a zone lot that was not previously permitted for a Civic, Public or Institutional Primary Use.
- B. The Zone Lot Size shall be a minimum of 12,000 square feet.

SECTION 11.2.10 TYPE 3 RESIDENTIAL CARE USES

11.2.10.1 All Zone Districts

In all zone districts, where permitted with limitations, additional Residential Care uses are permitted on the same zone lot as a Type 3 Residential Care use.

11.2.10.2 All MU, RO, and RX Zone Districts

In all MU, RO, and RX zone districts, where permitted with limitations, a proposed Type 3 Residential Care use shall be located a minimum of 1,200 feet from any other Type 3 and Type 4 Residential Care uses.

11.2.10.3 All CC, MX, MS, and C-CCN-3, -4, -5, -7, -8 Zone Districts

In all CC, MX, MS, and C-CCN-3, -4, -5, -7, and -8 zone districts, where permitted with limitations, a proposed Type 3 Residential Care use shall be located a minimum of 600 feet from any other Type 3 or Type 4 Residential Care uses.

11.2.10.4 All D-AS, D-AS-12+, D-AS-20+, and D-GT Zone Districts

In all D-AS, D-AS-12+, D-AS-20+, and D-GT zone districts, where permitted with limitations, a proposed Type 3 Residential Care use shall be located a minimum of 400 feet from any other Type 3 or Type 4 Residential Care uses.

SECTION 11.2.11 TYPE 4 RESIDENTIAL CARE USES

11.2.11.1 All Zone Districts

In all zone districts, where permitted with limitations, a Type 4 Residential Care use shall comply with the following limitations:

- A. Additional Residential Care uses are permitted on the same zone lot as a Type 4 Residential Care use.
- B. A proposed Type 4 Residential Care use shall not be located within a one-mile radius of more than three other Type 3 or Type 4 Residential Care uses.

11.2.11.2 All MU, RO and RX Zone Districts

In all MU, RO and RX zone districts, where permitted with limitations, a proposed Type 4 Residential Care use shall be located a minimum of 1,200 feet from any other Type 3 and Type 4 Residential Care uses.

11.2.11.3 All CC, MX, MS, and C-CCN-3, -4, -5, -7, -8 Zone Districts

In all CC, MX, MS, and C-CCN-3, -4, -5, -7, -8 zone districts, where permitted with limitations, a proposed Type 4 Residential Care use shall be located a minimum of 600 feet from any other Type 3 or Type 4 Residential Care uses.

11.2.11.4 All D-AS, D-AS-12+, D-AS-20+, and D-GT Zone Districts

In all D-AS, D-AS-12+, D-AS-20+, and D-GT zone districts, where permitted with limitations, a proposed Type 4 Residential Care use shall be located a minimum of 400 feet from any other Type 3 or Type 4 Residential Care uses.

SECTION 11.2.12 EMERGENCY EXPANSION

11.2.12.1 Short-term Emergency Expansion of a Residential Care Use

- A. During an emergency that threatens public health, as determined by the Zoning Administrator in consultation with other applicable City departments and agencies, a Residential Care use may expand to serve a number of guests not to exceed 125% of the maximum number of guests otherwise permitted, rounded up to the nearest whole number, for a period not to exceed 10 consecutive calendar days, or 10 consecutive overnight stays. For example, a Type 3 Residential Care use with a zoning permit allowing up to 50 guests may provide care for up to 63 guests for a 10-day period (or 10 overnight stays). Similarly, a Residential Care Type 4 use permitted to serve up to 200 guests may provide care for up to 250 guests for a 10-day period (or 10 overnight stays) in an emergency situation.
- B. Prior to taking advantage of this emergency allowance, a Residential Care use must provide written notice to the Zoning Administrator describing the nature of the emergency and its threat to public health, the need for additional services, the number of additional guests to be served during the emergency, and the dates the expansion of services will begin and end. At the end of the 10-day period, the Residential Care use shall return to the number of guests originally permitted. Any additional request for expansion made within 120 days of the Residential Care use's return to its permitted number of guests will be reviewed according to Section 11.2.12.2, Emergency Suspension of Limitations. The Zoning Administrator shall keep a written record of short-term emergency expansion notices.
- C. Qualifying public health emergencies for the purposes of administering this regulation include, but are not limited to:
 1. Extreme heat or cold
 2. Other severe weather events
 3. Flooding
 4. Pandemic
 5. Large-scale attack
 6. Hazardous materials incidents
 7. Fire
 8. Business closures that affect the continued provision of housing

11.2.12.2 Emergency Suspension of Limitations

A. Applicability

During emergencies that threaten public health or life, the Zoning Administrator may suspend certain limitations applicable to Residential Care uses serving people experiencing or at risk of homelessness.

B. Qualifying Emergencies

Qualifying emergencies include:

1. A state of local disaster or emergency declared by the Mayor, City Council or a public health order issued by the Executive Director of the Denver Department of Public Health and Environment.
2. A shortage of capacity for guests when temperatures are projected to be below 32 degrees Fahrenheit or exceed 90 degrees Fahrenheit for an extended period of time.
3. Other situations that clearly threaten public health or life that are described in a written request to the Zoning Administrator made by the manager or executive director of a City department or agency, or their designee.

C. The following Residential Care use limitations and definitions may be suspended during an emergency according to this Section 11.2.12.2, Emergency Suspension of Limitations:

1. Maximum permitted number of guests in a Residential Care use that serves people experiencing or at risk of homelessness.
2. Spacing and density limitations for Residential Care Uses opened specifically in response to the emergency (such as a temporary shelter).
3. The 10-day or 10 overnight stay limit for short-term expansion of an existing Residential Care use according to Section 11.2.12.1.A above.
4. The 120-day period after a short-term expansion of an existing Residential Care use, during which that use typically may not request an additional expansion according to Section 11.2.12.1.B above.

D. Suspension of limitations according to this Section 11.2.12.2, Emergency Suspension of Limitations shall last for the duration of the emergency, as determined by the Zoning Administrator in consultation with the requesting City department or agency. The Zoning Administrator shall keep a record of emergency suspension of use limitations granted under this section.

GROUP LIVING USE CATEGORY

SECTION 11.2.13 ASSISTED LIVING FACILITY

11.2.13.1 All SU and TU Zone Districts

In all SU and TU zone districts, where permitted with limitations, an Assisted Living Facility use is subject to all limitations applicable to Large Residential Care uses in Section 11.2.9.

SECTION 11.2.14 RESIDENCE FOR OLDER ADULTS

11.2.14.1 All SU Zone Districts

In all SU zone districts, where permitted with limitations, a Residence for Older Adults use shall include no more than 1 dwelling unit per zone lot.

11.2.14.2 All TU Zone Districts

~~In all TU zone districts, where permitted with limitations, a Residence for Older Adults use shall include no more than 2 dwelling units per zone lot.~~

SECTION 11.2.15 RESIDENTIAL CARE USE, SMALL OR LARGE

11.2.15.1 All Zone Districts

~~In all zone districts, where permitted with limitations:~~

A. Intent

~~The intent of these limitations for Residential Care uses is:~~

1. ~~To develop zoning regulations that apply to housing for special populations and which are humane, equitable and enforceable through the regulation of institutions and facilities only, and not individuals;~~
2. ~~To support and reinforce the viability and continuation of neighborhoods and communities that provide healthy environments for all their residents;~~
3. ~~To prevent the "institutionalization" of residential neighborhoods by concentrating Residential Care uses so as to allow all residents, including the special populations, to reap the benefits of residential surroundings;~~
4. ~~To increase location opportunities for critically needed Residential Care facilities, thereby helping to integrate special populations into the mainstream of society;~~
5. ~~To comply with the principles, policies and regulations of federal and state fair housing legislation;~~
6. ~~To establish an ongoing, effective process of communication between local neighborhood residents, the operators of Residential Care facilities and city agencies that regulate such facilities;~~
7. ~~To encourage and coordinate the use by the regulatory city agencies, as well as by all involved licensing agencies, of common categories and definitions of Residential Care facilities for special populations; and~~
8. ~~To promote the dispersing of facilities and beds for special populations thereby preventing individuals from being forced into neighborhoods with concentrations of treatment facilities and beds and thus perpetuating isolation resulting from institutionalization.~~

B. Designation of Contact Person

~~The applicant or operator of a Residential Care use shall designate a staff member who shall be available on a continuous basis to receive questions and concerns from interested neighbors. Any issues not satisfactorily resolved through the applicant and facility staff shall be reported to the Zoning Administrator.~~

C. Continuation of Certain Existing Uses

1. ~~An institution or any other use operating as a Residential Care use and existing as of April 1, 1993, shall be classified as a legal, nonconforming use and may continue its operation providing it has a valid zoning permit.~~

2. Any exterior additions or exterior structural modifications that increase the gross floor area of an existing structure shall require the approval of a zoning permit according to Section 12.4.2, Zoning Permit Review with Informational Notice.
3. Any increase in the number of permitted residents shall require the approval of a zoning permit according to Section 12.4.2, Zoning Permit Review with Informational Notice.
4. Any change in the type of resident of a Residential Care use permitted under the provisions of this section shall meet all applicable requirements except the requirements set forth in Section 11.2.9.1.D.3.

D. Limitations for Large Residential Care Use

All Large Residential Care uses shall comply with the following limitations:

1. Owner and operational limitations

- a. The applicant is the owner or has written approval of the owner of the property.
- b. The applicant and the owner have obtained or will obtain upon granting of the permit any licenses or certification required by the state and/or the city.
- c. The program and operational plan has been or will be approved by a licensing agency appropriate to the special population being served in the facility.
- d. The applicant and the operator will provide adequate measures for safeguarding the public and the facility residents. Such measures shall be appropriate to the special population including intake screening, supervision and security.
- e. The proposed use will not substantially or permanently injure the appropriate use of nearby conforming property.
- f. The number of beds in the proposed facility, in combination with the number of existing correctional institution and Residential Care use beds within the affected neighborhood, regardless of compliance with the spacing and density requirements set forth in this subsection, shall not substantially or permanently injure the neighborhood or shall not cause or add to the institutionalization of residential neighborhoods which would prevent all residents, including the special populations, from being able to reap the benefits of residential surroundings.

2. Property and building limitations

- a. The size and architectural style of new structures or additions to existing structures located in a residential zone shall not be substantially dissimilar from other structures in the surrounding residential neighborhood and shall comply with all other requirements of the zone district in which they are located.
- b. The applicant and the operator will adequately maintain the building and grounds.

3. Spacing and density limitations

- a. All proposed Large Residential Care uses shall satisfy the following minimum requirements unless specifically exempt by other provisions herein. Provided, however, that the Zoning Administrator may approve the permit for a Large Residential Care use in a location in violation of the spacing and density regulations of Section 11.2.9.1.D.3.d below upon a determination that the spacing violation is less than 10 percent of the required spacing and that locating the proposed use will not substantially or permanently injure the neighborhood. Provided, further, that the Zoning Administrator may require up to 200 feet of additional spacing between Large Residential Care uses in impacted neighborhoods.
- b. "Impacted neighborhoods" for the purpose of this subsection shall be those neighborhoods that have more Residential Care uses within their boundaries than the

~~city-wide average number per neighborhood. Community Planning and Development shall keep records of such "impacted neighborhoods".~~

- c. ~~All existing Large Residential Care uses and any religious assembly use (as a "religious assembly" use is defined in Article 11) containing a shelter that exceeds the limits of Section 11.2.11.3 shall be counted when the spacing and density requirements in Section 11.2.9.1.D.3.d below are applied.~~
- d. ~~Spacing and density regulations: (a) A Large Residential Care use shall be a minimum of 2,000 feet from another such use; and (b) No more than two other such uses shall exist within a 4,000 foot radius measured from the proposed use.~~

4. Minimum lot dimensions

~~The proposed use shall have a minimum lot size of 6,000 square feet and a minimum lot width of 50 feet.~~

5. Limitations on external effects

~~Such use shall comply with the limitations on external effects as established for permitted uses in the district in which it is located.~~

6. Special Requirements for Large Residential Care Uses

~~Certain Large Residential Care uses shall be subject to the following special requirements: In case of conflict with the general requirements of this section, the provisions of this subsection shall apply:~~

- a. ~~Large Residential Care use in all SU, TU, TH, or RH zone districts, other than a Community Corrections Facility or a Shelter for the Homeless, shall be located only in a structure existing on May 24, 1993, and shall be limited to a maximum number of 20 residents. Such structure shall not be enlarged as long as it is used for a Large Residential Care use. In a RO or MU zone district, Large Residential Care uses, other than a Community Corrections Facility or a Shelter for the Homeless, shall be limited to a maximum of 40 residents.~~
- b. **Community Corrections Facility** -- See Sections 11.2.10.1, Community Corrections Facility, for additional limitations applicable to Community Correction Facility uses, which are a specific type of Large Residential Care Use.
- c. **Shelter for the Homeless** -- See Section 11.2.11, Shelter for the Homeless, for additional limitations applicable to Shelter for the Homeless uses, which are a specific type of Large Residential Care Use.

E. Limitations for Small Residential Care Use

~~All Small Residential Care uses shall comply with the following limitations:~~

1. Owner and operational limitations

- a. ~~The applicant is the owner or has the written approval of the owner of the property.~~
- b. ~~The applicant and the operator have obtained or will obtain upon granting of the permit any licenses or certifications required by the state and/or the city.~~

2. Building and site limitations

~~Locating the proposed use in the neighborhood shall not substantially or permanently injure the appropriate use of nearby conforming property, and shall not cause or add to the institutionalization of residential neighborhoods that would prevent all residents, including the special populations, from being able to reap the benefits of residential surroundings.~~

3. Upon issuance of a permit for a Small Residential Care use, the applicant and the operator shall only be required to comply with:

- a. **Division 10.4, Parking and Loading:**

- b. Section 11.2.9.1.C.2, Continuation of Certain Existing Uses – Requirement for ZPIN – Review for Floor Area Increases in Existing Structures;
- c. Section 11.2.9.1.C.3, Continuation of Certain Existing Uses – Requirement for ZPIN – Review for Increases in Number of Permitted Residents;
- d. Section 11.2.9.1.D.4, Minimum lot dimensions; and
- e. Section 11.2.9.1.D.5, Limitations on external effects;

4. No conditions on the number of staff may be placed on the permit for transitional housing except for a condition requiring at least one staff person on-site.

F. Compliance with Denver Building and Fire Code
All Residential Care uses shall comply with applicable provisions of the Denver Building and Fire Code.

G. Approvals Personal to Applicant/Operator
The permit for an approved Residential Care use shall automatically expire at such time as the operator specified in the permit no longer operates the Residential Care use at the subject property.

SECTION 11.2.16 COMMUNITY CORRECTIONS FACILITY

11.2.16.1 I-MX, I-A, I-B and All Downtown Zone Districts

In the I-MX, I-A, I-B and all Downtown zone districts, where permitted with limitations, community corrections facilities shall comply with the following limitations:

- A. Community Corrections Subject to Large Residential Care Use Limitations**
Community corrections facilities are classified as Large Residential Care uses and are therefore subject to all of the requirements applicable to Large Residential Care uses in Section 11.2.9 below, in addition to the following use-specific limitations. In case of conflict with the requirements of Section 11.2.9, the more specific limitations in this subsection shall apply.
- B. Moratorium on New Community Corrections Facilities**
After April 30, 2008, no new community corrections facility shall begin operation until May 1, 2018.
- C. Permitted Location**
Community corrections facilities (for purposes of this subsection, hereinafter “facilities” or “facility”) shall be allowed in any I-MX, I-A, I-B, D-C, D-TD, and D-LD Zone Districts, and shall be located more than:
 - 1. 1,500 feet from a school meeting all requirements of the compulsory education laws of the state; and
 - 2. 1,500 feet from a Residential Zone District.
- D. Limits on Number of Residents**
 - 1. The proposed number of residents in a facility shall not exceed the following limits:
 - a. In the I-MX zone district, not to exceed 1 person per 50 square feet of gross floor area in sleeping areas with a maximum of 40 residents.
 - b. In the I-A and I-B zone districts, a maximum of 60 residents, provided, however, that if such facility is operated by the Denver Manager of Safety, or under contract to the Manager of Safety, such facility may have up to 120 residents, except that the existing facility located at 570 West 44th Avenue may have up to 90 residents.
 - c. In the D-C, D-TD, and D-LD zone districts, not to exceed 1 person per 50 square feet of gross floor area in sleeping areas or 40 residents, whichever is less.

2. The expansion of any existing community corrections facility to more than 60 residents shall be reviewed according to Section 12.4.2, Zoning Permit Review with Informational Notice.

E. Government Supervision Required for Transition Programs in a Community Corrections Facility

Any program to facilitate transition to a less-structured or independent residential arrangement in a community corrections facility shall be supervised directly or indirectly by an agency of the city, the state or the federal government.

SECTION 11.2.17 SHELTER FOR THE HOMELESS

11.2.17.1 Types of Shelters for the Homeless, Permitted Location, and Applicable Limitations

A. Types of Shelters for the Homeless

This Section 11.2.11 establishes the following 3 types of shelters for the homeless:

1. Shelter for the Homeless as a permanent, primary use;
2. Shelter for the Homeless as a primary or accessory use when operated by a place of religious assembly (as "religious assembly" use is defined in Article 11);
3. Shelter for the Homeless when operated in a building owned by a nonprofit corporation or by a governmental entity.

B. Permitted Locations and Applicable Use Limitations

The 3 types of shelters for the homeless identified in subsection 11.2.11.1.A above are permitted in the following zone districts, subject to compliance with the applicable use limitations:

Type of Shelter	Permitted/Prohibited Locations	Applicable Use Limitations
Shelter for the homeless as a permanent, primary use	Permitted in all zone districts, except the SU, TU, TH, RH, E-MU-2.5, MS/MX-2x, MS/MX-2, MX-2A, CMP-H, CMP-H2, CMP-ENT, OS-B, and OS-C zone districts.	Section 11.2.11.1 Section 11.2.11.2 Section 11.2.11.5
Shelter for the homeless when operated by a religious assembly use	Permitted in all zone districts.	Section 11.2.11.1 Section 11.2.11.3 Section 11.2.11.5
Shelter for the homeless when operated in a building owned by a nonprofit corporation or by a governmental entity	Permitted in all zone districts.	Section 11.2.11.1 Section 11.2.11.4 Section 11.2.11.5

11.2.17.2 Shelters for the Homeless as a Permanent, Primary Use

Shelters for the homeless that are permanent, primary uses, where permitted according to Section 11.2.11.1, Types of Shelters for the Homeless, Permitted Location, and Applicable Limitations, shall comply with all of the following limitations:

A. Limitations for Large Residential Care Use Apply

A homeless shelter that is a permanent, primary use is a specific type of Large Residential Care use, and is therefore subject to all of the requirements of Section 11.2.9.1.D, Limitations for Large Residential Care Use. In addition, such homeless shelters shall comply with the special requirements in this Section 11.2.11.2. In case of conflict with the requirements of Section

~~11.2.9.1.D., Limitations for Large Residential Care Use, the provisions of this Section 11.2.11.2 shall apply.~~

B. Number of Beds

~~The number of beds in the shelter shall not exceed 200. Notwithstanding the preceding sentence, for permanent homeless shelters having a zoning permit as of January 1, 2005, allowing 200 beds or more, the maximum number of beds in the shelter shall not exceed 350. In any one city council district, there shall be no more than 950 beds in homeless shelters that are permanent, primary uses and subject to this Section 11.2.11.2.~~

C. Increase in Shelter Resident Population

~~Except for an increase in the number of beds up to 350, pursuant to Section 11.2.11.2.B, Number of Beds, and notwithstanding the restriction of Section 11.2.9.1.C.2, Continuation of Certain Existing Uses - Requirement for ZPIN Review for Floor Area Increases in Existing Structures, and Section 11.2.9.1.C.3, Continuation of Certain Existing Uses - Requirement for ZPIN Review for Increases in Number of Permitted Residents, the permanent increase in the number of homeless shelter residents or in the amount of floor area of such shelter exceeding 10 percent shall require the approval of a zoning permit according to Section 12.4.2, Zoning Permit with Informational Notice.~~

D. Operations

1. ~~Overnight sleeping accommodations shall be in undivided sleeping space, offered for little or no financial compensation, and shall be operated in a manner that encourages short-term occupancy by residents.~~
2. ~~Such facility may include accessory support services but shall not be operated in such a manner that changes its primary function to a use classified as follows: community corrections facility, hospital, assisted living facility, nursing home, rehabilitation center for the handicapped, or residence for older adults.~~
3. ~~Waiting areas shall be placed and supervised so that the operation of the shelter will not normally create obstructions or problems in the use of adjacent public rights-of-way.~~
4. ~~Restroom facilities shall be made available to shelter residents while the shelter is closed. Such facilities may include restroom facilities provided by the city.~~

E. Spacing Required From a School

~~Proposed shelters for the homeless shall be located more than 500 feet from a school meeting all the requirements of the compulsory education laws of the state.~~

11.2.17.3 Shelters for the Homeless Operated by a Religious Assembly Use

~~In all zone districts, homeless shelters operated by a religious assembly use (as a "religious assembly" use is defined in Article 11) need not comply with the provisions of Section 11.2.9, Residential Care Use, Small or Large or Section 11.2.11.2, Shelters for the Homeless as a Permanent, Primary Use, including the requirement for a zoning permit, provided the following limitations are satisfied instead:~~

- A. ~~Such shelter may be operated for up to 120 days in either consecutive or nonconsecutive order per calendar year with any number of residents, or it may be operated throughout the entire year with one of the following: a maximum of 8 residents or any number of persons bearing to each other a relationship as stated in the definition of "household" in Division 11.12, Use Definitions.~~
- B. ~~If the 120-day limitation or the number of residents limitation in Section 11.2.11.2.A are exceeded, the shelter must comply only with the requirements of Section 11.2.9.1.D.3.d, Spacing and density limitations, but need not comply with any other requirements of either Section~~

~~11.2.9, Residential Care, Large or Small, or Section 11.2.11.2, Shelter for the Homeless as a Permanent, Primary Use.~~

11.2.17.4 Shelters for the Homeless Allowed in Buildings Owned by Nonprofit Corporations or Governmental Entities

~~In all zone districts, homeless shelters operated in buildings owned by nonprofit corporations or by governmental entities need not comply with Section 11.2.9, Residential Care Use, Small or Large, or Section 11.2.11.2, Shelter for the Homeless as a Permanent, Primary Use, including the requirement for a zoning permit, provided the following limitations are satisfied instead:~~

- A. ~~Such shelter may be operated for up to 120 days in either consecutive or nonconsecutive order per calendar year with a maximum of 100 residents. If the 120-day limitation or the 100-resident cap is exceeded, the shelter must comply only with the requirements of Section 11.2.9.1.D.3.d, Spacing and density limitations, but need not comply with any other requirements of Section 11.2.9, Residential Care Use, Small or Large, or Section 11.2.11.2, Shelter for the Homeless as a Permanent, Primary Use.~~
- B. ~~Prior to opening the shelter, the operator of the shelter shall submit to the Zoning Administrator evidence:~~
 1. ~~That the Denver Department of Human Services is involved in the proposed shelter;~~
 2. ~~That a public meeting relating to opening the shelter was held;~~
 3. ~~That at least 7 days prior to the public meeting, notice of such public meeting was given to those neighborhood organizations registered according to D.R.M.C., Section 12-94, whose boundaries encompass or are within 700 feet of the proposed use and to the City Council member in whose district the proposed shelter will be located, and flyers announcing the public meeting were distributed at least 3 days prior to such public meeting to all properties within 3 blocks of the proposed shelter; and~~
 4. ~~That a community oversight committee has been created, consisting of the City Council member in whose district the proposed shelter is located and at least 4 persons who reside within 1,500 feet of the proposed shelter, to address neighborhood issues relating to the ongoing operations of the shelter. The community oversight committee may encourage appropriate parties to enter into a community agreement to address such issues.~~

11.2.17.5 Suspension of Limitations in Emergency

~~The Zoning Administrator has the authority to suspend the terms of this Section 11.2.11's limitations for Shelters for the Homeless in emergency, life threatening situations as determined by the Zoning Administrator in consultation with the Manager.~~

11.9.3.8 The Zoning Administrator may fix such reasonable terms and conditions to the granting of a zoning permit found necessary to mitigate adverse impacts on adjacent properties. In addition, each zoning permit approved for a Large Child Care Home shall include the following conditions and requirements:

- A. The proposed home shall provide full-time supervision of the children in the home during hours of operation; and
- B. The proposed home shall comply with the limitations on external effects as established for primary uses in the district in which it is located.

SECTION 11.9.4 ALL OTHER TYPES

In all zone districts, where permitted with limitations, the following types of Home Occupations are permitted subject to compliance with the use-specific limitations listed below.

11.9.4.1 Adult Care Home

~~In zone districts where Home Occupations of Foster Family Care, rooming and/or boarding and adult care home are permitted, only one such Home Occupation will be permitted in any single-unit dwelling or dwelling unit.~~

11.9.4.2 Animal Care Services

Animal Care Services, including grooming, care, or boarding of domestic or household animals (but not including retail sales), are permitted as a Home Occupation provided the total number of animals in the dwelling unit is no greater than the maximum number of animals permitted as accessory uses in Section 11.8.5, Keeping of Household Animals, above.

11.9.4.3 Artist Studio

- A. An Artist Studio is permitted as a Home Occupation only to create individual works of art and display them for viewing purposes only; Art Galleries are not permitted.
- B. In all MU zone districts, the restoration of individual works of art is permitted as part of the Artist Studio Home Occupation, provided the use of hazardous or toxic materials within the dwelling unit shall be subject to review and approval by the Fire Department for compliance with the Denver Fire Code.

11.9.4.4 Beauty Shop or Salon

11.9.4.5 Child Care Home, Small

11.9.4.6 Clock and Watch Repair

11.9.4.7 Craft Work

11.9.4.8 Custom Dressmaking, Millinery, Tailoring, Sewing

11.9.4.9 Food Preparation

11.9.4.10 Foster Family Care

~~Foster Family Care is permitted as a Home Occupation subject to compliance with the following standards:~~

- A. ~~The dwelling unit in which the Foster Family Care is proposed is located in a Residential Zone District or Mixed Use Commercial Zone District.~~
- B. ~~In zone districts where Home Occupations of Foster Family Care, rooming and/or boarding, and adult care home are permitted, only one such Home Occupation will be permitted in any one dwelling unit.~~

C. ~~The permit is necessary and desirable to provide a service or a facility that would contribute to the general wellbeing of the community.~~

11.9.4.11 Fresh Produce and Cottage Foods Sales

Fresh Produce and Cottage Foods Sales is permitted as a Home Occupation subject to compliance with the following standards:

- A. Items for sale are limited to the products defined in Subsection 11.12.8.2.9 Fresh Produce and Cottage Food Sales;
- B. Sales are permitted only from 8:00 a.m. until dusk daily; and
- C. The home occupation permittee must have grown, cultivated, and/or prepared all items for sale.
- D. Wholesale activities are prohibited.

11.9.4.12 Laundering and Pressing

11.9.4.13 Office, Non-Medical, Non-Dental

Office, not including Dental/Medical Office and/or Clinic, is permitted as a Home Occupation subject to compliance with the following standards:

- A. No goods, wares or merchandise shall be commercially created, displayed, exchanged, stored or sold as part of the permitted Home Occupation use.
- B. Professional and personal services provided shall be by appointment only. Walk-in appointments are prohibited.

11.9.4.14 Online Retail Sales

Online Retail Sales are permitted as a Home Occupation use subject to the following limitations:

- A. On-premise Retail or Wholesale sales direct to consumers are prohibited
- B. No goods may be sold that are otherwise illegal for retail sale or exchange in Colorado, or prohibited for retail sale or exchange under any other city, state or federal law.
- C. Any requisite business license must be obtained and sales taxes must be paid as required by law, as applicable.

11.9.4.15 Professional Studio

- A. Instructional or other services provided shall be by appointment only. Walk-in appointments are prohibited.

11.9.4.16 Rooming and/or Boarding

~~Rooming and/or Boarding is permitted as a Home Occupation subject to compliance with the following standards:~~

- A. ~~The dwelling unit shall contain not more than one kitchen.~~
- B. ~~Number of roomers/boarders permitted - see table below:~~

PRIMARY RESIDENTIAL USE - ZONE DISTRICT	MAXIMUM NUMBER OF ROOMERS/BOARDERS PERMITTED AS HOME OCCUPATION
Single Unit Dwelling Use - All SU Zone Districts	1
Single Unit Dwelling Use - All Other Zone Districts	2
Two-Unit Dwelling Use - All Zone Districts	2
Multi-Unit Dwelling Use - All Zone Districts	2

- C. ~~The number of roomers/boarders permitted under this subsection shall not affect the number of Domestic Employees permitted to reside in the same dwelling unit. See Section 11.8.3, Domestic Employees, for provisions allowing domestic employees as an accessory use to all primary residential use.~~
- D. ~~In zone districts where Home Occupations of Foster Family Care, rooming and/or boarding and adult care home are permitted, only one such Home Occupation will be permitted in any single-unit dwelling or dwelling unit.~~

11.9.4.17 Tutoring Services

Tutoring services are permitted as a Home Occupation, provided no more than 4 students shall be tutored simultaneously.

SECTION 11.9.5 UNLISTED HOME OCCUPATIONS

Generally, an accessory home occupation use not listed as specifically permitted in this Division 11.9 is prohibited. However, the Zoning Administrator may approve Home Occupation uses not specifically listed in this Division 11.9 according to the general provisions stated in Section 11.10.1, Unlisted Accessory Uses, except that all determinations shall be reviewed according to Section 12.4.2, Zoning Permit Review with Informational Notice. The Zoning Administrator shall not allow any of the following uses as Home Occupations:

- 11.9.5.1 Adult business uses.
- 11.9.5.2 Animal services and sales, except as specifically permitted in Section 11.9.4, Home Occupations - All Other Types.
- 11.9.5.3 Commercial parking.
- 11.9.5.4 Commercial warehousing or storage uses.
- 11.9.5.5 Industrial, manufacturing and wholesale uses, except as specifically permitted in Section 11.9.4, Home Occupations - All Other Types.
- 11.9.5.6 Retail or wholesale sales except for Fresh Produce and Cottage Foods Sales and Online Retail Sales home occupations as limited by Section 11.9.2.6.
- 11.9.5.7 Vehicle or equipment sales, rentals, and services, including repairs.

DIVISION 11.12 USE DEFINITIONS

This Division 11.12 contains definitions of primary, accessory and temporary uses permitted in this Code. The Division is organized in the same order as uses are presented in the Use and Parking Tables in Articles 3 through 9, with specific use definitions organized by sections and sub-sections that align with the primary use classifications and use categories, followed by sections for accessory uses and temporary uses.

SECTION 11.12.1 PRIMARY USE CLASSIFICATION

11.12.1.1 All primary or principal land uses in Denver are organized into one of the following five general land use classifications:

- A. Residential Uses
- B. Civic, Public & Institutional Uses
- C. Commercial Sales, Service & Repair Uses
- D. Industrial, Manufacturing & Wholesale Uses
- E. Agriculture Uses

11.12.1.2 Uses are further organized into use categories and specific use types listed under each general land use classification. A definition of a specific use type shall also meet the definition of the use category in which it falls. The Use and Parking Tables in Articles 3 through 9 are all similarly organized into the above five general land use classifications, use categories and specific use types.

11.12.1.3 The general land use classifications and use categories listed in this Division are intended to be mutually exclusive; that is, a use classified into one use category, such as “lodging accommodations,” cannot be classified in a different use category, such as “group living residential care,” unless otherwise expressly permitted by this Code.

SECTION 11.12.2 PRIMARY RESIDENTIAL USES

11.12.2.1 Definition of Household Living Use Category

A. Definition of Category

1. Household Living is defined as residential occupancy of a “dwelling unit” by a single “household”. Tenancy is arranged on a month-to-month or longer basis.

B. Definitions of Related Terms

1. Dwelling Unit

One or more habitable rooms constituting a unit for permanent occupancy, having but one kitchen together with facilities for sleeping, bathing, and which unit occupies a structure or a portion of a structure.

2. Household

- a. A “household” is either: A dwelling unit occupied by persons in any one of the following four categories living as a single non-profit housekeeping unit, including any permitted domestic employees:
 - i. A single person occupying a dwelling unit, plus any permitted domestic employees; or
 - ii. Any number of persons related to each other by blood, marriage, civil union, committed partnership, adoption, or documented responsibility (such as foster care or guardianship), occupying a dwelling unit as a single non-profit housekeeping unit, plus any permitted domestic employees; or

iii. A number of unrelated adults (18 years or older), depending on the size of the dwelling unit as provided in the table below, plus any number of persons related to each unrelated adult by blood, marriage, civil union, committed partnership, adoption, or documented responsibility (such as foster care or guardianship), and who occupy a dwelling unit as a single non-profit house-keeping unit, plus any permitted domestic employees.

DWELLING UNIT SIZE (SQUARE FEET OF FINISHED FLOOR AREA)	MAXIMUM NUMBER OF UNRELATED ADULTS PER HOUSEHOLD
<u>Less than 1,800</u>	<u>5 adults</u>
<u>at least 1,800 and less than 2,000</u>	<u>6 adults</u>
<u>at least 2,000 and less than 2,200</u>	<u>7 adults</u>
<u>at least 2,200 and less than 2,400</u>	<u>8 adults</u>
<u>at least 2,400 and less than 2,600</u>	<u>9 adults</u>
<u>at least 2,600 or more</u>	<u>10 adults</u>

b. Up to 8 adults of any relationship with a "handicap" according to the definition in the Federal Fair Housing Act, and who do not meet this Code's definition of a Congregate Living or Residential Care use.

c. This use excludes any use that meets the definition of a Congregate Living uses.

d. A single person plus any number of persons bearing to each other the relationship of: parent, grandparent, child, sibling, step-child, step-sibling, step-parent, grandchild, parent-in-law, sibling-in-law, child-in-law, parent-sibling (uncle or aunt), or nibling (nephew or niece); or

e. Two persons living together as spouses, domestic partners, or civil union partners, plus any number of persons bearing to either the relationship of: parent, grandparent, child, sibling, step-child, step-sibling, step-parent, grandchild, parent-in-law, sibling-in-law, child-in-law, parent-sibling (uncle or aunt), or nibling (nephew or niece); or

f. In a single unit dwelling use only: One or two unrelated adults over the age of 18 years plus any persons bearing to either of the two unrelated adults the relationship of parent, grandparent, child, sibling, step-child, step-sibling, step-parent, grandchild, parent-in-law, sibling-in-law, child-in-law, parent-sibling (uncle or aunt), or nibling (nephew or niece); or

g. In a two-unit dwelling use or multi-unit dwelling use only: Up to four unrelated adults over the age of 18 years plus any persons bearing to either of the four unrelated adults the relationship of parent, grandparent, child, sibling, step-child, step-sibling, step-parent, grandchild, parent-in-law, sibling-in-law, child-in-law, parent-sibling (uncle or aunt), or nibling (nephew or niece).

3. Non-Profit Housekeeping Unit.

A household comprised of persons who live together as a family or as the functional equivalent of a family, and who share household activities and responsibilities, such as meals, chores, rent, and expenses. The choice of specific adults comprising the single non-profit housekeeping unit is determined by the members of such housekeeping unit rather than by a landlord, property manager, or other third party. Members of a single non-profit housekeeping unit are not required to seek services or care of any type as a condition of residency. All members of the non-profit housekeeping unit jointly occupy the entire premises of the dwelling unit.

C. Specific Household Living Use Types and Definitions

1. Dwelling, Single Unit

One dwelling unit contained in a single structure.

2. Dwelling, Two Unit

Two dwelling units contained in one structure located on a single zone lot.

3. Dwelling, Multi-Unit

Three or more dwelling units contained in a single structure.

4. Dwelling, Live/Work

A combination of residential occupancy and commercial activity located within the same dwelling unit. In a "Live/Work Dwelling," the commercial activity is a primary use in combination with a primary residential occupancy use, and the commercial occupancy shall not be considered a "Home Occupation" or other accessory use.

11.12.2.2 Definition of Congregate Living Use Category

A. A structure or structures providing Residential Occupancy for Persons who do not live in a Household according to Section 11.12.2.1.B.2., Household. A Congregate Living use may occur within a self-contained Dwelling Unit. A Congregate Living use may also, such as with a tiny home village, occur within multiple structures where no one or not all structures contain a self-contained Dwelling Unit, but all structures comprising the use together provide residents with facilities for sleeping, bathing, cooking and preparing food. This use category includes groups of Persons who each have separate contracts or agreements with property owners, who do not jointly occupy the entirety of a dwelling unit, or who jointly occupy the entirety of a dwelling unit but who exceed the maximum number of adults permitted in a household as defined in Section 11.12.2.1.B.2., Household. Tenancy is arranged on a month-to-month or longer basis. Residents of a Congregate Living use may share sleeping units, and may have shared cooking, bathroom and common areas, or some combination of personal and shared facilities. Residents in a Congregate Living use are not required to seek services or care of any type as a condition of residency. This use includes, but is not limited to; the following uses:

1. Rent-by-the-room configurations, such as rooming and boarding houses or student housing.
2. Dormitories that house students of a primary Education use located on or off the same zone lot as the primary Education use, including a building used for members of a fraternity or houses officially recognized by a college/university, or seminary.
3. Tiny home villages

11.12.2.3 Definition of Residential Care Use Category

A. A Residential Structure or structures where guests receive treatment, supervision, emergency shelter, personal care, protective oversight, or other similar care or services, from staff on-site as a condition of the guests' residency. This definition excludes care provided by domestic em-

ployees or care workers in a private home that meets this code's definition of Household Living or Congregate Living. For purposes of this definition, a "guest" is a person who stays overnight, regardless of total length of stay. For purposes of this definition, staff and volunteers who regularly return to another place of primary residence, but who stay overnight while working or volunteering, shall not be considered "guests." Tenancy may range from overnight to 30 days or longer. This use category includes, but is not limited to:

1. Shelters
2. Community correction facilities and halfway houses
3. Recovery residences, where a guest's participation in a program of supervision, treatment, or care is required
4. Rehabilitation facilities
5. Assisted living facilities
6. Nursing homes or hospices

B. Specific Residential Care Use Types

Residential Care uses are further defined and distinguished by number of guests as follows:

1. Residential Care Use, Type 1: up to 10 guests year-round, or up to 100 guests for a maximum of 130 consecutive or non-consecutive days per year
2. Residential Care Use, Type 2: 11 to 40 guests
3. Residential Care Use, Type 3: 41 to 100 guests
4. Residential Care Use, Type 4: 101 or more guests

11.12.2.4 Definition of Group Living Use Category

Group Living is defined as residential occupancy of a structure by a group of people that does not meet the definitions of "household living," "lodging," or "correctional institution". Tenancy is arranged on a monthly or longer basis, except as permitted in a Shelter for the Homeless group living use, and the size of the group may be larger than a single household, and may include supervisory employees who reside on-site. Often, group living structures have a common eating area for residents. The residents may receive care, training, or treatment, and caregivers may or may not reside at the site. "Group living" includes the term "group home".

A. Specific Group Living Use Types and Definitions

1. Assisted Living Facility

A residential structure or structures licensed by the state as an assisted living residence and housing more than 8 adults. This use is a residential facility that makes available to more than 8 adults not related to the owner of such facility, either directly or indirectly through a resident agreement with the resident, room and board and at least the following services: personal services; protective oversight; social care due to impaired capacity to live independently; and regular supervision that shall be available on a 24-hour basis, but not to the extent that regular 24-hour medical or nursing care is required.

- a. Such a use shall not include residential treatment facilities for substance abusers or the mentally ill.
- b. This use shall not include the uses nursing home, hospice or residence for older adults.
- c. A facility that otherwise meets this definition but has 8 or fewer residents shall be considered a Residential Care use, small, and not an assisted living facility.

2. Community Corrections Facility

A structure which provides a residence for three or more persons who have been placed in a community corrections program of correctional supervision, including a program to facilitate transition to a less-structured or independent residential arrangement; and residents of such facilities shall be those persons placed in the community corrections program by the judicial or correctional departments of the city, the state or the federal government. A community corrections facility shall be considered a ~~Large Residential Care use~~.

3. Nursing Home, Hospice

An establishment licensed by the state department of public health, which establishment maintains and operates continuous day and night facilities providing room and board, personal services and skilled nursing care, including hospices, specifically excluding, however, hospitals. A nursing home, hospice shall not be considered a Residential Care use.

4. Residence for Older Adults

A single unit dwelling or multi-unit dwelling housing a number of unrelated mobile older adults (individuals fifty-five (55) or more years of age) in excess of the number of unrelated persons permitted per dwelling unit, receiving fewer services than a special care home or assisted living facility. A residence for older adults shall not be considered a Residential Care use.

5. Residential Care Use

a. Definition

A specific type of group living use where the residents are provided supervised medical, psychological, or developmental care or treatment on a daily, regular basis.

b. Types of Residential Care Uses

“Residential care use” is limited to the following specific types of group living uses:

i. **Transitional housing:** A residential structure housing a number of unrelated persons in excess of the number of unrelated persons permitted per dwelling unit in the zone district, where such persons are provided with individual bedrooms, where the primary service offered at the facility is related to transitioning into permanent housing and all services provided are not sufficient to constitute a “special care home” and where occupancy of such housing is primarily made available for more than 30 days and less than 2 years. Transitional housing shall be considered a Small Residential Care use.

ii. **Shelter for the homeless:** See definition of “shelter for the homeless” in subsection 11.12.2.2.A.7.

iii. **Community corrections facility:** See definition of “community corrections facility” in subsection 11.12.2.2.A.2.

iv. **Special care home:** A special care home is a residential structure housing a number of unrelated persons in excess of the number of unrelated persons permitted per dwelling unit in the zone district in which the dwelling unit is located, where such persons are living as a single housekeeping unit and are receiving more than 12 hours per day of on-premises treatment, supervision, custodial care or special care due to physical condition or illness, mental condition or illness, or behavioral or disciplinary problems. A special care home, depending on its size, shall be considered a large or Small Residential Care use.

c. Exclusions

Residential care uses shall NOT include any of the following types of group living or institutional uses:

- i. ~~Assisted living facility~~
- ii. ~~Foster family care~~
- iii. ~~Nursing home or hospice~~
- iv. ~~Residence for older adults~~
- v. ~~Rooming and/or boarding house.~~
- vi. ~~A residential structure containing residents whose principal form of support is financial assistance.~~
- vii. ~~Safe house: A residential structure that provides residents a place of refuge from abusive people or dangerous social situations. Such structure does not provide refuge for fugitives from justice. Such use may be permitted as a "multi unit dwelling" use.~~

d. **Residential Care Use, Large**

~~A Residential Care use that is the primary residence of 9 or more persons. "Large Residential Care use" shall include shelter for the homeless of any size, or a community corrections facility of any size.~~

e. **Residential Care Use, Small**

~~A residential structure that is the primary residence of 8 or fewer persons, but housing a number of unrelated persons in excess of the number of unrelated persons permitted per dwelling unit in the zone district or transitional housing of any size. This use shall not include a community corrections facility, shelter for the homeless, rooming and/or boarding house, nursing home, safe house, or large special care home.~~

6. **Rooming and Boarding House**

~~A residential building containing one or more guest rooms that are used, rented, or hired out, with or without meals, for permanent occupancy. A Rooming and Boarding House makes no provision for cooking in any of the guest rooms occupied by paying guests.~~

- a. ~~A Rooming and Boarding House use shall not be considered a Residential Care use.~~
- b. ~~A Rooming and Boarding House use shall not be considered a Student Housing use.~~

7. **Shelter for the Homeless**

~~A facility that has as its primary function the provision for overnight sleeping accommodations for homeless people. Tenancy may be shorter than a monthly basis in a shelter for the homeless. A shelter for the homeless shall be considered a Large Residential Care use.~~

8. **Student Housing**

~~A structure used for long-term group residential accommodations for students of a college, university or seminary, and where such structure is related to the college, university or seminary. Common cooking facilities and common gathering rooms for social purposes may also be included. May include a building used for group living quarters for members of a fraternity or sorority that has been officially recognized by the college, university or seminary.~~

SECTION 11.12.3 PRIMARY CIVIC, PUBLIC & INSTITUTIONAL USES

11.12.3.1 Basic Utilities

A. **Definition of Basic Utilities Use Category**

Basic Utilities is defined as buildings, structures, or other facilities used or intended to be used by any private or governmental utility, not including telecommunications. This category includes buildings or structures that house or contain facilities for the operation of water, wastewater, waste disposal, natural gas or electricity services. This use also includes water storage



11.12.3.4 Education

A. Definition of Education Use Category

A public or private facility for the general or specialized education or instruction of children or adults. Education uses may or may not meet the requirements of the State of Colorado compulsory education laws. Education uses include elementary or secondary schools, universities or colleges, and vocational or professional schools.

B. Specific Education Use Types and Definitions

1. Elementary or Secondary School

A public or private school meeting all requirements of the compulsory education laws of the state and providing instruction to students in kindergarten and grades above. The definition of Elementary or Secondary School also includes "High School."

a. High School

Any school designed for instruction that includes grades 10 through 12, regardless of whether instruction is also provided in other grades.

2. University or College

An educational institution that offers specialized instruction in any of several fields of study and/or in a number of professions or occupations and is authorized to confer various degrees such as the bachelor's degree. University or college uses may be composed of multiple buildings and uses organized on an integrated campus property composed of one or more zone lots and blocks. Education uses may include a variety of uses such as classroom buildings, administrative offices, sports facilities, **student housing**, research facilities and other related uses operated by the governing board of the institution within the campus or on adjoining zone lots. [Student housing that is located on or off the same Zone Lot as a University or College is considered a Congregate Living use, per Section 11.12.2.2.](#)

3. Vocational or Professional School

Education or training in business, commerce, language, or other similar activity or occupational pursuit, or in the use of specialized, technical, or technological equipment or office machines, and not otherwise defined as Home Occupation, college or university, or elementary or secondary school.

11.12.3.5 Public and Religious Assembly

A. Definition of Public and Religious Assembly Use Category

Public and religious assembly uses are permanent places where persons regularly assemble for religious worship or secular activities, and which are maintained and controlled by a body organized to sustain the religious or public assembly. Public assembly uses include civic and social organizations such as private lodges, clubs, fraternities, and similar private membership organizations.

B. Specific Public and Religious Assembly Use Types and Definitions

1. Religious Assembly

A building where persons regularly assemble for religious worship and which building is maintained and controlled by a religious body organized to sustain public worship.

2. Club or Lodge

A building or land used for the activities of an association of persons for the promotion of a private or nonprofit common objective, such as literature, science, politics, and good fellowship. A club or lodge is not accessory to, or operated as, or in connection with a tavern, eating or drinking place, or other commercial establishment open to the general public.

where the eating and drinking services are provided. No more than 30% of the manufactured product may be sold to off-premises customers. The volume of liquor manufactured on the premises of the brewpub shall not exceed 300 gallons per day each calendar year.

11.12.4.5 Lodging Accommodations

A. Definition of Lodging Accommodations Use Category

Lodging accommodations uses are characterized by visitor-serving facilities that provide temporary lodging in guest rooms or guest units, for compensation, and with an average length of stay of less than 30 days ~~except as specifically permitted for a Single Room Occupancy (SRO) Hotel~~. Accessory uses may include pools and other recreational facilities for the exclusive use of guests, limited storage, restaurants, bars, meeting facilities, and offices, but excludes Short-term Rentals as defined in Section 11.12.7.7.

B. Specific Lodging Accommodations Use Types and Definitions

1. Bed and Breakfast Lodging

A manager-occupied residential structure providing rooms for temporary, overnight lodging, with or without meals, for paying guests. A Bed and Breakfast may provide simultaneous lodging to different parties under separate contracts.

2. Extended Stay Hotel

A hotel containing guest rooms oriented to allow independent housekeeping for occupancy by the week or by the month, or some portion thereof, with facilities for sleeping, bathing, and cooking.

3. Hotel

One or more buildings providing temporary lodging primarily to persons who have residences elsewhere, or both temporary and permanent lodging in guest rooms, or apartments. The building or buildings have an interior hall and lobby with access to each room from such interior hall or lobby.

4. Hostel

A nonprofit facility located in a residential structure and associated with a national or international hostel organization, which facility has but one kitchen and provides sleeping accommodations for not more than 25 persons. All housekeeping duties are shared by the occupants under the supervision of a resident manager.

5. Motel

One or more buildings providing residential accommodations and containing rental rooms and/or dwelling units, each of which has a separate outside entrance leading directly to rooms from outside the building. Services provided may include maid service and laundering of linen, telephone and secretarial or desk service, and the use and upkeep of furniture. Up to 20 percent of the residential units may be utilized for permanent occupancy.

6. Single Room Occupancy (SRO) Hotel

~~One or more buildings providing lodging accommodations in 6 or more "SRO rooms" A SRO Hotel use shall not be considered a Residential Care use or a Student Housing use. A "SRO room" means:~~

- a. ~~A guest room intended or designed to be used, rented, or hired out, and which is occupied as a primary residence for any duration; and~~
- b. ~~SRO Rooms may contain kitchens and/or the building(s) may contain congregate cooking and dining facilities.~~

2. Animal Care Service

A Home Occupation that provides for the keeping and day-time care only of household animals of a type and number specifically permitted under Section 11.8.5. The number of such animals shall not exceed the number(s) permitted under Section 11.8.5 including any animals kept by the resident(s) of the primary dwelling unit. As a home occupation, Animal Care Services may also include cleaning and grooming services.

3. Artist Studio

See definition of "Artist Studio" in Section 11.12.4.2.B, Specific Arts, Entertainment & Recreation Use Types and Definitions.

4. Child Care Home, Small

A Home Occupation providing the care and education for periods of less than 24 hours of not more than 6 children, plus 2 additional children who attend either before or after school hours, subject to the licensing requirements of the state and the city.

5. Child Care Home, Large

A Home Occupation operated in a single-unit dwelling unit or in a dwelling unit in a multiple-unit dwelling providing care and education for periods of less than 24 hours of 7 to 12 children subject to the licensing requirements of the state and the city.

6. Craft Work

A Home Occupation where individual pieces are crafted but not mass produced, and which shall consist of one (1) or more of the following: ceramics, inlays, needlework, knitting, weaving, leather work, woodwork, metal work or glass work.

7. Food Preparation

A Home Occupation where prepared food items that are not Cottage Foods, as defined in Fresh Produce and Cottage Food Sales, are made and assembled for off-premises consumption by others and/or for off-premises sale.

8. Foster Family Care

~~A Home Occupation that provides full-time care of not more than 4 children or 2 adults unrelated to the residents by blood or adoption subject to the licensing requirements of the state. A qualified foster care adult is a person who is placed in the home by an agency of the state or one of its political subdivisions.~~

9. Fresh Produce and Cottage Foods Sales

A Home Occupation where:

- a. Raw, uncut fresh fruits, vegetables, and herbs, excluding marijuana, that were grown in a permitted accessory Garden or primary Urban Garden are sold; and/or
- b. Cottage Foods are prepared and/or sold.

Cottage Foods are defined in the State of Colorado Cottage Foods Act (House Bill 13-1158) unless otherwise prohibited by the Department of Environmental Health. Cottage Foods shall not include any food products made with marijuana.

10. Office, Non-Medical, Non-Dental

See Section 11.12.4.6.A, Definition of Office Use Category, but not including Dental / Medical Office or Clinic.

11. Online Retail Sales

Online Retail Sales are retail or wholesale sales where the transaction originates on and is completed on the Internet via an individual website or a third party marketplace. Online Retail Sales may include the sale of handmade or craft goods created, fabricated or assembled on the residential premises. Online Retail Sales are distinguished from Retail

Sales or Wholesale in that goods or services are not transferred directly to a buyer at the residential premises.

12. Professional Studio

See definition of "Professional Studio" in Section 11.12.4.2.B, Specific Arts, Entertainment & Recreation Use Types and Definitions.

13. Rooming and/or Boarding

~~A Home Occupation that provides lodging with or without meals, is available for permanent occupancy only, and which makes no provision for cooking in any of the rooms occupied by paying guests.~~

SECTION 11.12.9 DEFINITIONS OF USES ACCESSORY TO PRIMARY NONRESIDENTIAL USES

11.12.9.1 Amusement Devices

An electronic or mechanical device which operates as a game, contest or amusement of any description and which includes but is not limited to pinball machines, video games, foosball machines or similar devices. This term does not include musical devices, children's rides, or pool and/or billiard tables.

11.12.9.2 Automobile Rental Services

The rental of automobiles under conditions where (1) the storage of all rental automobiles is located on the same zone lot as the office for the automobile rental service, and (2) no mechanical or maintenance work on automobiles shall be done on the premises, and (3) the land area assigned for storage of rental automobiles shall not be included for computation of any required off-street parking space.

11.12.9.3 Car Wash Bay

Washing, cleaning, and/or waxing of private automobiles, light trucks and vans, but not commercial fleets, by hand or with manually operated equipment or automatic machinery.

11.12.9.4 College Accessory to a Place for Religious Assembly

A post-secondary education facility operated by a place for religious assembly and physically located on a zone lot occupied by such place for religious assembly.

11.12.9.5 Conference Facilities

A facility which provides meeting halls, trade centers, merchandise marts, or convention centers for training and other gatherings for large numbers of people for similar functions; may be developed separately or in combination with another permitted use.

11.12.9.6 Drive Through Facility

An accessory use designed and operated to enable persons to receive a service or purchase goods while remaining within a motor vehicle. The facility includes the area of the drive aisle dedicated to placing orders or picking up such goods or services, as well as the actual facility for placing orders and picking up of such goods or services.

11.12.9.7 Emergency Vehicle Access Point

The entrance to portion of a building that houses a Hospital use that provides the intake of patients from Ambulances or similar emergency services vehicles. This includes the Driveway and Drive Aisles designed for access of the entrance for such emergency vehicles from the public right-of-way.

11.12.9.8 Garden

The growing and cultivation of fruits, flowers, herbs, vegetables, and/or other plants. An accessory Garden use may operate as either an enclosed or unenclosed use.

ARTICLE 12. ZONING PROCEDURES & ENFORCEMENT

SECTION 12.2.9 SUMMARY TABLE OF AUTHORITY AND NOTICE

	REVIEW AND DECISION-MAKING AUTHORITY						TYPE OF PUBLIC NOTICE REQUIRED					
	D = Decision-Making Authority R = Review and Recommendation Authority * = Public Hearing Required						■ = Notice Required Blank Cell = Notice Not Required					
	Zoning Administrator	Manager	DRC	Board of Adjustment	Planning Board	City Council	Informational Notice			Notice of Public Hearing		
							Written and Posted Notice of Community Information Meeting	Written and Posted Notice of Receipt of Application	Posted Notice of Final Administrative Decision	Written	Posted	Published
Zoning Permit Review	D											
<u>Zoning Permit Review with Community Information Meeting</u>	D						■					
Zoning Permit Review with Informational Notice	D							■	■			
Site Development Plan Review	R	R	D/R See Sec. 12.4.3 for site development plans where DRC has review and recommendation authority		D* See Sec. 12.4.3 for site development plans that require public notice			■ See Sec. 12.4.3 for site development plans that require public notice	■ See Sec. 12.4.3 for site development plans that require public notice		■ See Sec. 12.4.3 for site development plans that require notice of a public hearing	
Zone Lot Amendment	D											
Administrative Adjustment	D											
Code Interpretation, Determination of Unlisted Use	D											
Comprehensive Sign Plan	D				R*			■	■	■	■	
Variance	R			D*								
Appeal of Administrative Decision	R			D*								
Special Exception	R	R		D*								
Official Map Amendment (Rezoning)		R			R*	D*		■ - Written Notice Only		■	■	■
Text Amendment	R	R			R*	D*				■		■
Infrastructure Master Plan	R		D									
Large Development Review			D				■					



	REVIEW AND DECISION-MAKING AUTHORITY						TYPE OF PUBLIC NOTICE REQUIRED					
	D = Decision-Making Authority R = Review and Recommendation Authority * = Public Hearing Required						■= Notice Required Blank Cell = Notice Not Required					
							Informational Notice			Notice of Public Hearing		
	Zoning Administrator	Manager	DRC	Board of Adjustment	Planning Board	City Council	Written and Posted Notice of Community Information Meeting	Written and Posted Notice of Receipt of Application	Posted Notice of Final Administrative Decision	Written	Posted	Published
Repeal of an Approved General Development Plan			D							■	■	
Regulating Plan	R	D										
Temporary Tiny Home Village	⊕						■					



2. Such sign shall describe the proposal, give directions for submitting comments to Community Planning and Development within 30 days from the beginning of the posting period, and state that any final decision to approve the application shall be posted at the same location for 15 days as soon as it is effective.
3. Posted notices shall be removed by the applicant from the subject property by no later than 15 days after the end of the posting period. Failure to do so shall constitute a violation of this Code.

C. Posted Notice of Final Administrative Action

When required by Section 12.2.9, Summary Table of Authority and Notice, posted notice of final administrative action on an application shall be provided in compliance with the following standards:

1. Within 7 days after reaching a final decision to approve an application subject to informational notice, Community Planning and Development shall cause the applicant to post the property with a copy of the approving decision for a period of 15 days.
2. The applicant shall post the property in a conspicuous location with a sign or sign template provided by Community Planning and Development.
3. The effective date of the final administrative action and the start of the 15-day period during which appeals may be made to the Board of Adjustment shall be the first day of the posting of the sign. Such sign shall describe how an appeal from the final administrative decision may be filed and state that any appeal must be filed within 15 days, and shall provide contact information for obtaining the standards and criteria that will govern the appeal.

12.3.4.6 Community Information Meeting

A. Timing of Community Information Meeting

When required prior to submitting an application, the applicant shall schedule a community information meeting and provide public notice of the community information meeting according to the following standards.

1. Large Development Review

The applicant shall schedule a community information meeting following the DRC's preliminary determination of the LDR scope according to Section 12.4.12.6, and prior to application for Large Development Review according to Section 12.4.12.8.

2. Residential Care

The applicant shall schedule a community information meeting prior to application for a zoning permit.

3. Temporary Tiny Home Village

The applicant shall schedule a community information meeting following a pre-application meeting (see Section 11.11.17.2.C.1) and prior to application for a zoning permit.

B. Required Public Notice

1. Written Notice of Community Information Meeting

The applicant shall send written notice at least 21 days prior to the date of the community information meeting in compliance with the following standards:

- a. The written notice of the community information meeting shall be sent to:
 - i. Owners and tenants (if the latter is different from owners) of the subject site and any real property located within 400 feet of the subject site;



- ii. The City Council members in whose districts the subject site is located, and the at-large City Council members;
- iii. Any neighborhood organizations registered according to D.R.M.C. Section 12-94, whose boundaries encompass or are within 400 feet of the subject site;
- iv. Other community organizations that are not registered neighborhood organizations and are either located within 400 feet of the subject site or operate within the statistical neighborhood or neighborhoods that contain the subject site or district boundary. Applicants shall use reasonable efforts to identify such organizations, examples of which may include schools, religious assemblies, and other community-based nonprofit organizations.

b. In addition to the written notice required by Section 12.3.4.6.A.1, above, written notice for a Large Development Review shall also be sent to:

- i. Any neighboring municipality or county that is contiguous to any boundary of the LDR area;
- ii. Denver Public Schools if the LDR area anticipates residential development; and
- iii. Any special district of which any part of the district's boundaries is included in the LDR area.

c. The written notice shall be sent via U.S. mail first class or by electronic mail if the recipient has indicated their acceptance of notice by electronic mail.

d. Notification shall include the location and general description of the proposed application, the location (in-person or electronically), time and date of the community information meeting, and, if applicable, the process to be followed, including date, time and place of any related public meeting or hearing, if such has been scheduled.

e. The failure of any real property owner, tenant, registered neighborhood organization, or non-RNO organization, for whatever reason, to receive a notification required hereunder shall not invalidate any final action by the city.

2. Posted Notice of Community Information Meeting

Posted notice of the community information meeting shall be provided in compliance with the following standards:

- a. No later than 21 days prior to the date of the required community information meeting, the applicant shall be responsible for posting one or more signs on the subject property providing public notice thereof.
- b. Posted notice shall be in number, size, location, and content as prescribed by the Manager and shall indicate the time and place (in-person or electronically) of the community information meeting, and any other information prescribed by the Zoning Administrator.
- c. The applicant shall take all reasonable efforts to assure that posted signs remain on the site in the number and location prescribed by the Manager, and in good condition to maintain legibility, during the posting period.
- d. Posted notices shall be removed by the applicant from the subject property no later than 15 days after the community information meeting has been held. Failure to do so shall constitute a violation of this Code.

3. Conduct of Community Information Meeting, General

The Manager shall publish guidelines for the conduct of community information meetings specific to the application types for which such meetings are required.

2. Concurrent Applications

The applicant may submit a zoning permit review with informational notice application concurrent with other required applications according to Section 12.3.3.9, Concurrent Applications. In no case, however, shall a building permit, as applicable, be issued until the zoning permit is issued according to this Section, unless the Zoning Administrator allows an exception in writing.

D. Informational Notice

Written and Posted Notice of Receipt of Application

Written and posted notice of receipt of application shall be provided according to Sections 12.3.4.5.A and 12.3.4.5.B.

1. ~~Supplemental Information Notice Requirements for Large Residential Care Uses~~

~~In addition to the general Informational Notice requirements in Section 12.3.4, information notice for proposed Large Residential Care Uses shall include a packet including a copy of the completed application; a detailed explanation of applicant's and operator's experience; the facility's operational plan as set forth by the operator; the name, address and telephone number of a staff member of the applicant and operator designated as the contact person; and a summary of licensing procedures required for the proposed facility.~~

E. Review, Referral and Final Decision

1. Review and Referral

The Zoning Administrator may refer the zoning permit review with information notice application to other affected or interested parties and agencies for review and comment as deemed necessary to make a decision on the application.

2. Planning Board Review of Comprehensive Sign Plans

The Zoning Administrator shall forward zoning permit applications for review of Comprehensive Sign Plan for Large Facilities (authorized under Division 10.10, Signs) to the Planning Board for the Planning Board's review and recommendation.

- a. The Planning Board shall hold a public hearing to review the zoning permit application and make a recommendation to the Zoning Administrator.
- b. The applicant shall provide written and posted public notice of such public hearing according to Section 12.3.4, Public Notice Requirements.
- c. The Planning Board shall review the public testimony and the criteria for review, and shall adopt a recommendation for denial, approval, or approval with conditions. The Planning Board recommendation shall be forwarded to the Zoning Administrator no later than 15 days following the Planning Board's recommendation.

3. Final Decision

- a. The Zoning Administrator shall make a final decision to approve, approve with conditions, or deny the zoning permit application, taking into consideration relevant agency or other party comments.
- b. The Zoning Administrator may attach conditions to the zoning permit approval reasonably necessary to protect the health, safety and welfare of the community and to minimize adverse impacts on adjacent properties, as authorized by this Code.

F. Posted Informational Notice of Final Administrative Action

The applicant shall provide posted informational notice of the final administrative action according to Section 12.3.4.5.C.

12.4.2.5 Review Criteria

The Zoning Administrator shall consider all public comment and the following criteria in making a decision on an application for zoning permit with informational notice review:



- A. The zoning permit is consistent with all prior approvals that are regulatory and controlling for the subject property, as applicable. For example, all zoning permits shall be consistent with a previously approved Large Development Framework, Infrastructure Master Plan, General Development Plan, Regulating Plan, or Site Development Plan.
- B. The zoning permit complies with all applicable regulations in this Code.
- C. The proposal will not substantially or permanently injure the appropriate use of adjacent conforming properties, taking into consideration all proposals for mitigation of such impacts.
- D. Additional Review Criteria for Homeless Shelters**
~~In addition to the review criteria above, the Zoning Administrator shall approve a zoning permit for a homeless shelter only if the Zoning Administrator finds the proposed shelter will not substantially or permanently injure the appropriate use of conforming residential properties located within 500 feet of the proposed use. Evidence of such injury shall clearly establish the anticipated specific problems attributed to residents of the proposed shelter for the homeless while in or around the shelter as distinct from the general problems attributed to persons using or passing through the subject area.~~

12.4.2.6 Requirements and Limitations After Zoning Permit Issuance

A. Expiration

- 1. Except as otherwise allowed in subsection C. below, all approved zoning permits authorizing construction shall expire after 180 days after the date of issuance if a building permit has not been issued within the 180-day time period and is not thereafter cancelled.
- 2. Except as otherwise allowed in subsection C. below, an approved zoning permit authorizing a permitted use shall expire if a building permit has not been issued within the 180-day time period or if the permitted use is not established within the 180-day time period. After the use is validly established, an approved zoning use permit shall run with the land.
- 3. If a zoning permit is granted upon review and approval of a Site Development Plan according to Section 12.4.3 of this Code, then the zoning permit authorizing construction or a permitted use shall expire at the same time as the approved Site Development Plan.

B. Modification and Rescission

The Zoning Administrator may change, modify, or rescind any zoning permit decision, whether or not the decision has been appealed to the Board of Adjustment. Rescission of a permit is allowed according to the procedure and criteria stated in Section 12.11.6 of this Code.

C. Modifications and Amendments to an Approved Zoning Permit

Modifications and amendments to an approved zoning permit are allowed according to Section 12.3.7 of this Code.

SECTION 12.4.3 SITE DEVELOPMENT PLAN REVIEW

12.4.3.1 Purpose

The purpose of the site development plan review process is to ensure compliance with the standards and provisions of this Code and other applicable city standards, rules and regulations, while encouraging quality development in Denver reflective of the goals, policies, and strategies found in the Comprehensive Plan. Site development plan review is generally reserved for development with the potential for significant on-site and off-site impacts necessitating inter-departmental and inter-agency referral, review, and, in some cases, approval prior to final action by Community Planning and Development. After the City's approval of a site development plan, Community Planning and Development is authorized to issue requisite zoning permits under this Code.

B. Administrative Adjustments to Ensure Compliance with Federal Law

1. Compliance with Federal Religious Land Use and Institutionalized Persons Act of 2000 (RLUIPA)

a. General

The Zoning Administrator may grant administrative adjustments to any use, building form, or design standard stated in Articles 3 through 9, Contexts and Zone Districts, Article 11, Use Limitations, or Article 10, General Design Standards in order to eliminate a substantial burden on religious exercise as guaranteed by the Federal Religious Land Use and Institutionalized Persons Act of 2000, as amended.

b. Limitations

In no circumstance shall the Zoning Administrator approve an adjustment that allows a religious assembly use, or any uses/structures/activities accessory to it, in a zone district where Articles 3 through 9 prohibit such use or accessory use/structure/activity.

c. Conditions of Approval

In granting an administrative adjustment, the Zoning Administrator may require conditions that will secure substantially the objectives of the modified standard and that will substantially mitigate any potential adverse impact on the environment or on adjacent properties, including but not limited to additional landscaping or screening.

2. Reasonable Accommodations under Federal Fair Housing Act (FFHA)

a. The Zoning Administrator may grant administrative adjustments to provide reasonable accommodations under the Federal Fair Housing Act. In the application for an administrative adjustment under this subsection, the applicant shall identify the type of housing being provided and cite the specific provisions of the Federal Fair Housing Act that require reasonable accommodations be made for such housing. The Zoning Administrator may grant the following types of administrative adjustments to assure reasonable accommodations required by law:

- i. Modify any minimum distance or spacing requirements, building setback, height, open space or building coverage, or landscaping requirement by no more than 10 percent; or
- ii. Reduce any off-street parking requirement by no more than 1 space; or
- iii. Allow more than 5 unrelated adults to live as a single housekeeping unit in a structure that has 1,600 square feet or less of finished floor area, to a maximum of 8 adults.

b. The Zoning Administrator may approve a type of reasonable accommodation different from that requested by the applicant if the Zoning Administrator concludes that a different form of accommodation would satisfy the requirements of the Federal Fair Housing Act with fewer adverse impacts on adjacent areas. The decision of the Zoning Administrator shall be accompanied by written findings of fact as to the applicability of the Federal Fair Housing Act, the need for reasonable accommodations, and the authority for any reasonable accommodations approved. Requests for types of accommodation that are not listed above may only be approved through a Variance or Official Map Amendment (Rezoning) process.

3. Compliance with Other Federal Laws

The Zoning Administrator is authorized to grant administrative adjustments necessary to ensure compliance with any other applicable federal law, provided the adjustment is no greater than any adjustment specifically authorized by this Section 12.4.5. Requests



- A. A nonconforming structure containing a residential use, congregate living use, or a residential care use located in a Residential Zone District, or
- B. A nonconforming structure located in a C-CCN zone district; or
- C. A structure located in the D-C or D-TD zone district that became a nonconforming structure on October 14, 1994, as a result of (a) changes to the prior B-5 zone district changing the floor area premiums and maximum gross floor area of structures; or (b) the creation of the OD-2, OD-3 and OD-4 overlay districts regarding maximum building height or sunlight preservation requirements; or
- D. A structure located in a Residential Zone District that became a nonconforming structure on June 26, 1998, as a result of the creation the OD-6, OD-7 and OD-8 overlay districts, or
- E. A residential structure located in a SU zone district that became a nonconforming structure July 21, 2008, as a result of the creation of the OD-10 overlay district.

12.8.4.5 Voluntary Demolition

Nothing in this Section 12.8.4 shall be deemed to permit the reconstruction or reestablishment of all or any part of a nonconforming structure that has been voluntarily demolished.

SECTION 12.8.5 DETERMINATION OF NONCONFORMING STATUS

Nonconforming status shall be determined by the Zoning Administrator.

ARTICLE 13. RULES OF MEASUREMENT & DEFINITIONS

F


FAA: Federal Aviation Administration.

FCC: Federal Communications Commission.

Facade: Any exterior wall surface located at the ground level of a building that encloses the interior of the building.

Face Block: A zone lot or lots Abutting one side of the block. The “same” block face indicates only those zone lots Abutting the same side of the block as the subject property. The “opposite face block” includes those zone lots located on a different block than the subject property, but located directly across the street from and Abutting the same street as the subject property, and bounded by the same intersecting streets as the subject property’s block. See Figure 13.3-1.

Figure 13.3-1

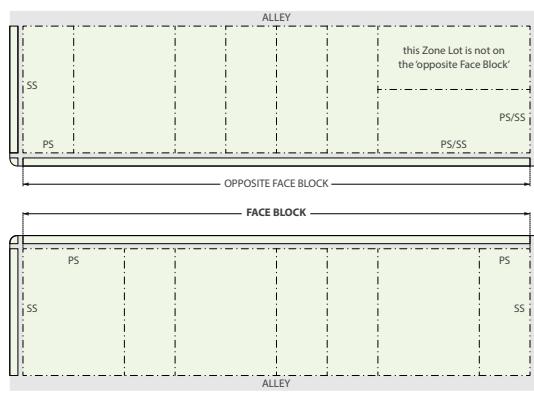

Not to Scale. Illustrative Only.

Fence and Wall: An artificially constructed barrier of wood, masonry, stone, wire, metal, or other manufactured material or combination of materials erected to enclose, screen, or separate areas. For a retaining wall, see definition of “Retaining Wall.”

Fine Arts: Individual art pieces not mass produced.

Finished Floor Area: See definition of Floor Area, Finished

Finished Grade: See definition of Grade, finished.

Fixed Rack Bicycle Parking Facility: An unenclosed device used for the parking of bicycles that is affixed permanently to the ground. Examples include, but are not limited to, an inverted “U”-style bicycle rack.

Fixture: A small structure or part of a structure used by the occupants of the premises for the purpose of containing or holding containers of garbage, trash recycling and similar waste products, or for landscaping such as bird baths, ornamental statuary, arbors, rock gardens, monuments, flagpoles, ornamental lampposts and similar decorative features but not including enclosed buildings.

Flag Lot: See “Zone Lot, Flag.”

Flatwork: Improved areas constructed of Impervious Material providing pedestrian access to entrances and buildings, including walkways, stairs, and ramps. Shall be located at original grade. Shall not include areas meeting the definition of Patio.

Floor Area, Finished: The total livable area of a dwelling unit as calculated by the Denver County Assessor and shown in the city's Real Property records. Finished floor area is the sum of above- and below-grade livable areas listed in the Assessor's Real Property records as "living area," "finished basement," and "garden level finished" (or as may be listed under similar terms adopted by the Denver County Assessor to account for total taxable livable area inside a dwelling unit). Unfinished basement area and floor area in an attached/detached garage is not included.

Floor Area, Habitable: The aggregate of the horizontal area of all rooms used for habitation, such as living room, dining room, kitchen, and bedroom(s), but not including hallways, stairways, cellars, service rooms, utility rooms, bathrooms, closets, unheated areas such as enclosed porches.

Floor Area Ratio (FAR): See the Rule of Measurement within this Article 13.

Floor Plate: The sum of the gross horizontal area of a single floor of a building structure, including interior balconies, but excluding exterior balconies; all horizontal floor dimensions are measured from the exterior faces of the exterior walls.

Flush-Mounted Solar Panels: See "Solar Panels, Flush-Mounted."

Food: Any raw, cooked or processed edible substance, ice, beverage, or ingredient used or intended for use or for sale in whole or in part for human consumption. For purposes of this Code, "Food" shall not include "Marijuana Concentrate" as defined in this Division 13.3.

Footcandle (F.C.): A unit of illuminance equivalent to one lumen per square foot.

Former Chapter 59: Chapter 59 of the Denver Revised Municipal Code as filed with the Denver City Clerk at City Clerk Filing No. 10-512-A on May 20, 2010. Former Chapter 59 remains in full force and effect for any land not re-zoned to zone districts in the Denver Zoning Code.

Freeways: Those streets designed to carry large volumes of through traffic at high speeds by restriction of abutting private property from rights of direct access by vehicles and pedestrians.

Front Porch: See "Porch, Front".

Frontage: All of the zone lot fronting on one side of an intersecting or intercepting street, or between a street and right-of-way, end of dead-end street, waterway, or City boundary measured along the street line. An intercepting street shall determine only the boundary of the frontage on the side of the street that it intercepts.

Full Cutoff Lighting Fixture: A light fixture that has a light distribution pattern that results in no light being permitted at or above a horizontal plane located at the bottom of the luminaire.

Fully Shielded Lighting Fixture: A light fixture that provides internal or external shields and louvers that prevents light emitted by the light fixture from causing glare or light trespass.

